

(12) UK Patent Application (19) GB (11) 2 347 952 (13) A

(43) Date of A Publication 20.09.2000

(21) Application No 0004285.3

(22) Date of Filing 23.02.2000

(30) Priority Data

(31) 60121841 (32) 26.02.1999 (33) US
(31) 60154047 (32) 16.09.1999

(71) Applicant(s)

Shell Internationale Research Maatschappij B.V.
(Incorporated in the Netherlands)
Department IP/43 Carel Van Bylandtlaan 30,
2596 HR The Hague, Netherlands

(72) Inventor(s)

Robert Lance Cook
David Paul Brisco
Lav Ring
Michael L Bullock

(74) Agent and/or Address for Service

Haseltine Lake & Co
Imperial House, 15-19 Kingsway, LONDON,
WC2B 6UD, United Kingdom

(51) INT CL⁷
E21B 43/10 33/14

(52) UK CL (Edition R)
E1F FJT FLA

(56) Documents Cited

GB 2344806 A EP 0681354 A WO 98/00626 A
US 6070671 A

(58) Field of Search

UK CL (Edition R) E1F FJT FLA
INT CL⁷ E21B
Online: WPI,EPDOC,JAPRO

(54) Abstract Title

Apparatus for coupling a liner to a well casing

(57) As apparatus 200 is placed within wellbore 100 in overlapping relationship with casing 115, fluids within chamber 315 pass to chamber 310 via passages 295, 290, 285, 260 and 265. Passage 265 is then closed and passages 260, 285, 290 and 295 are cleared by injecting fluid into chamber 315. Cement is injected into chamber 315 followed by a wiper plug 320 which seals off passage 290. A sealing ball 325 is then injected into passage 280 to seal off throat 280 and cause the pressure in chamber 300 to rise and move expansion cone 230 in an axial direction to radially expand liner 220. The expansion of liner 220 causes seal 250 and anchor 255 to contact the casing 115. Other apparatus is described for the repair of casing and for the placement of the repair apparatus.

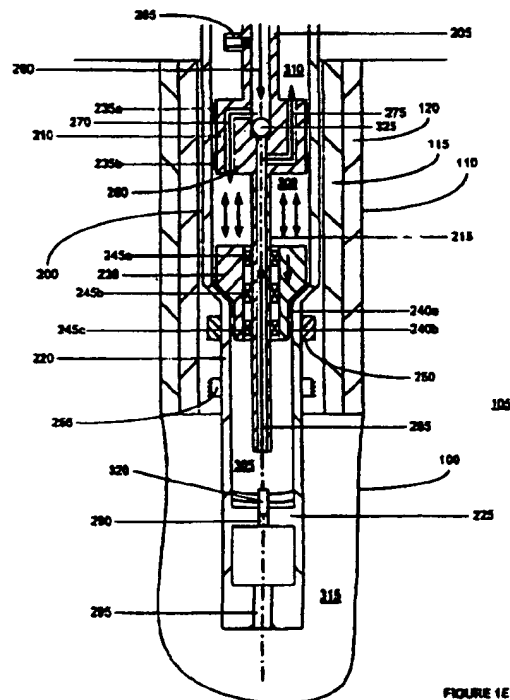


FIGURE 1E

GB 2 347 952 A

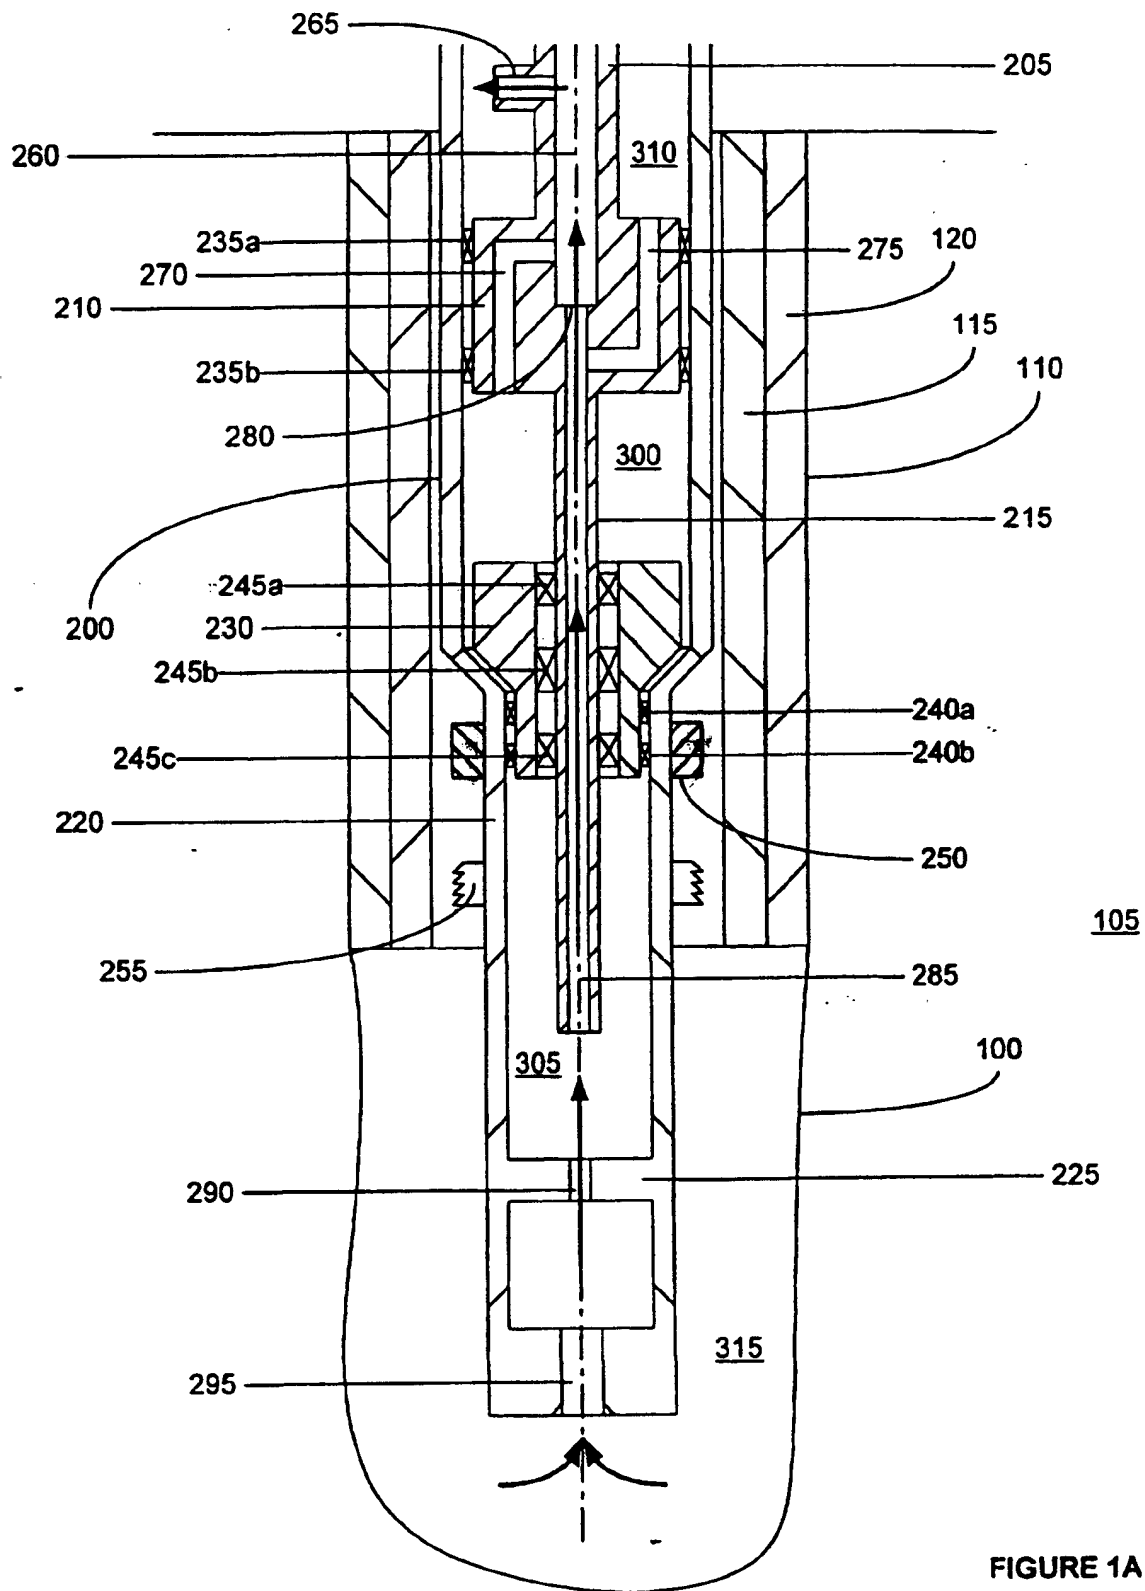


FIGURE 1A

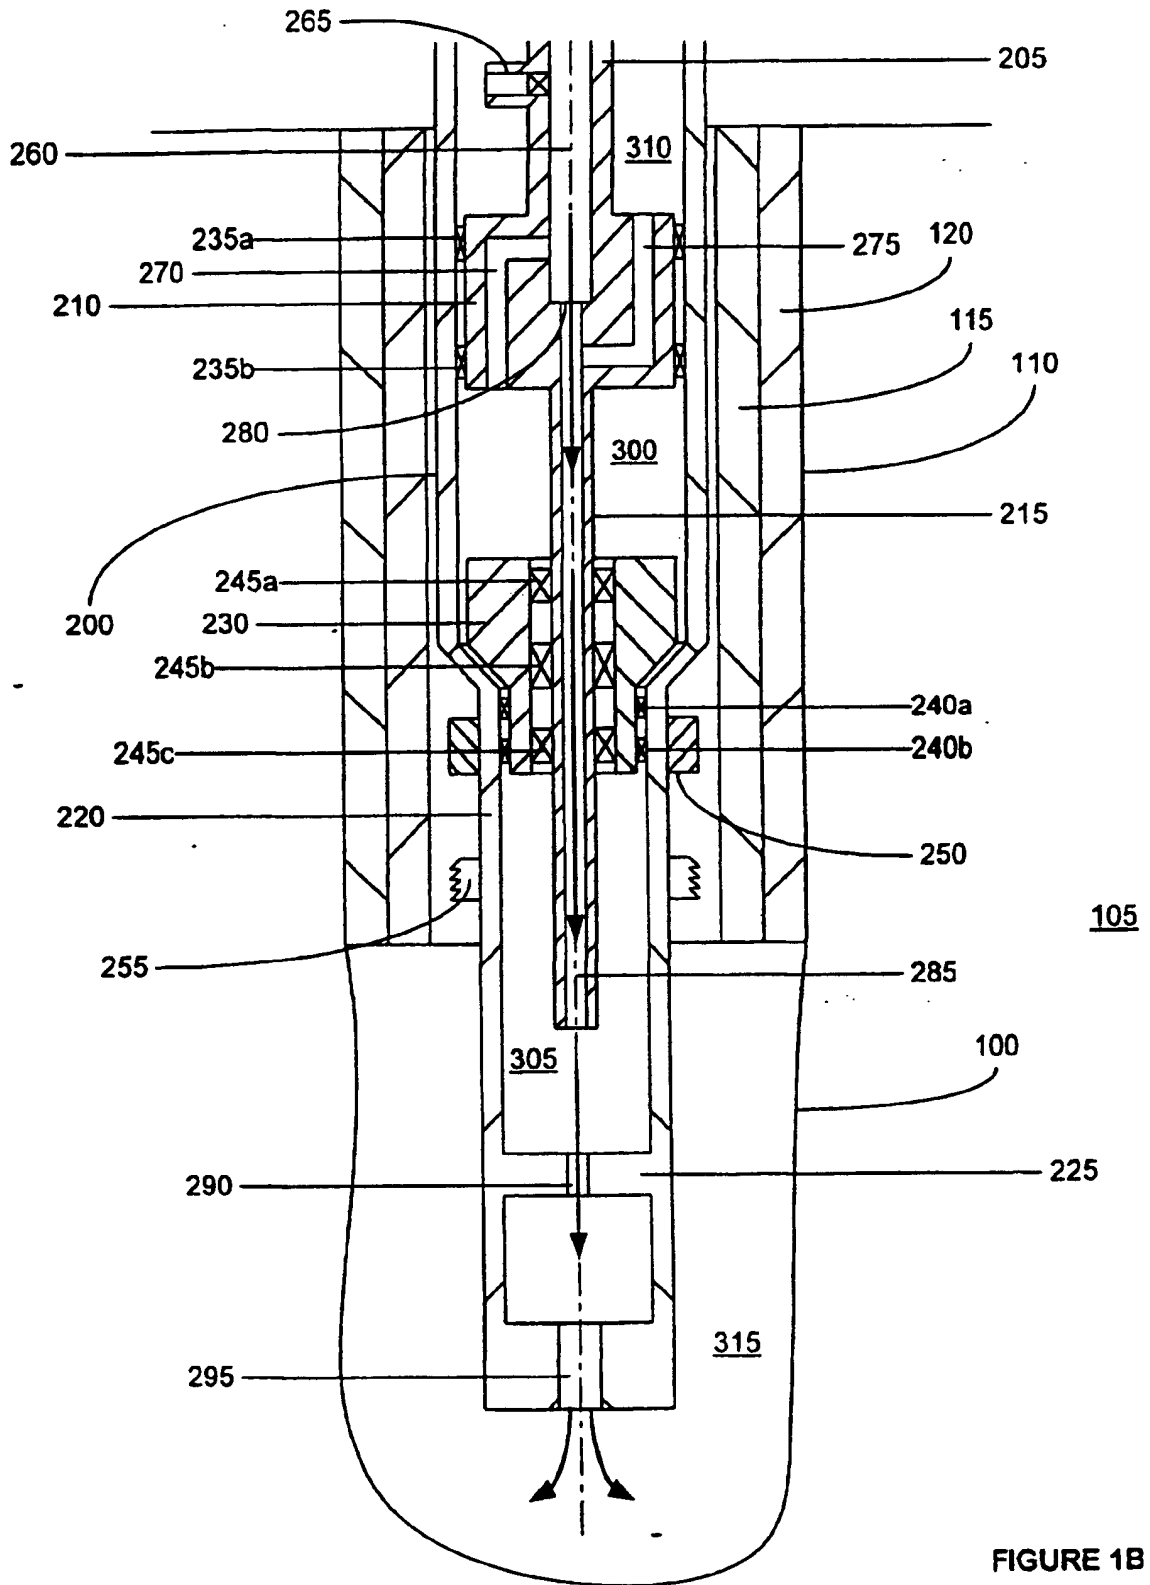


FIGURE 1B

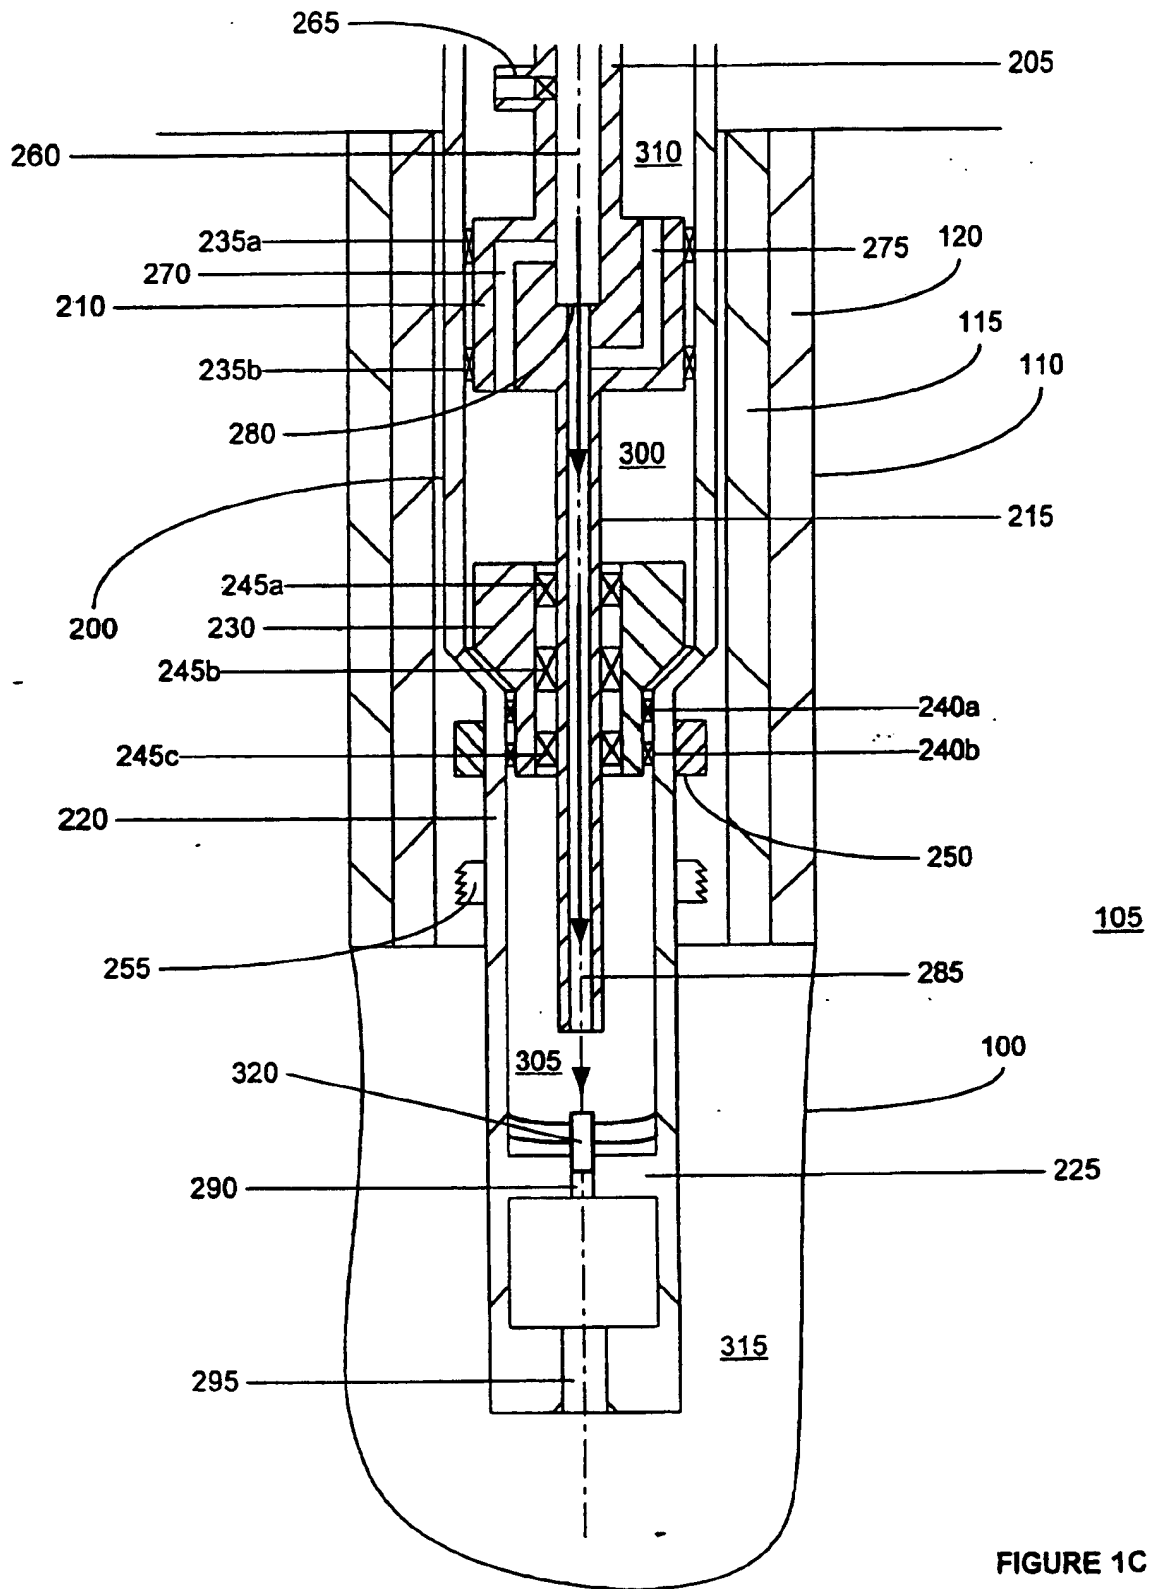


FIGURE 1C

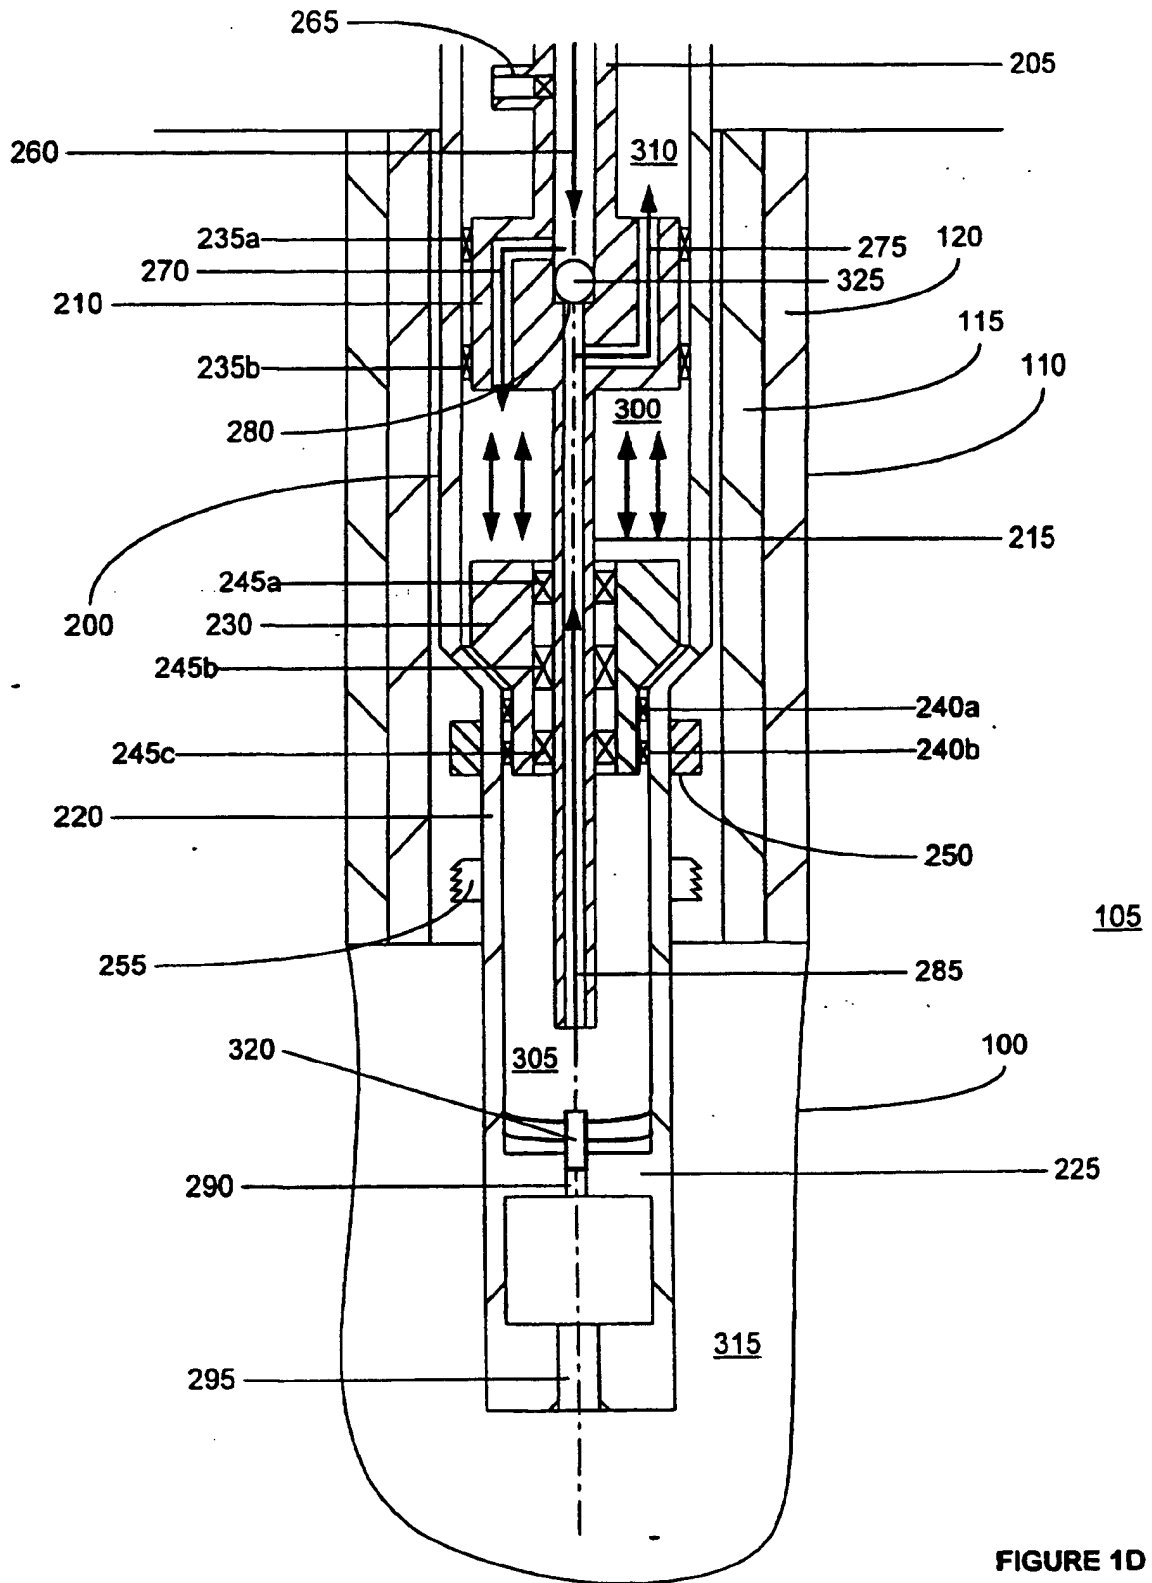


FIGURE 1D

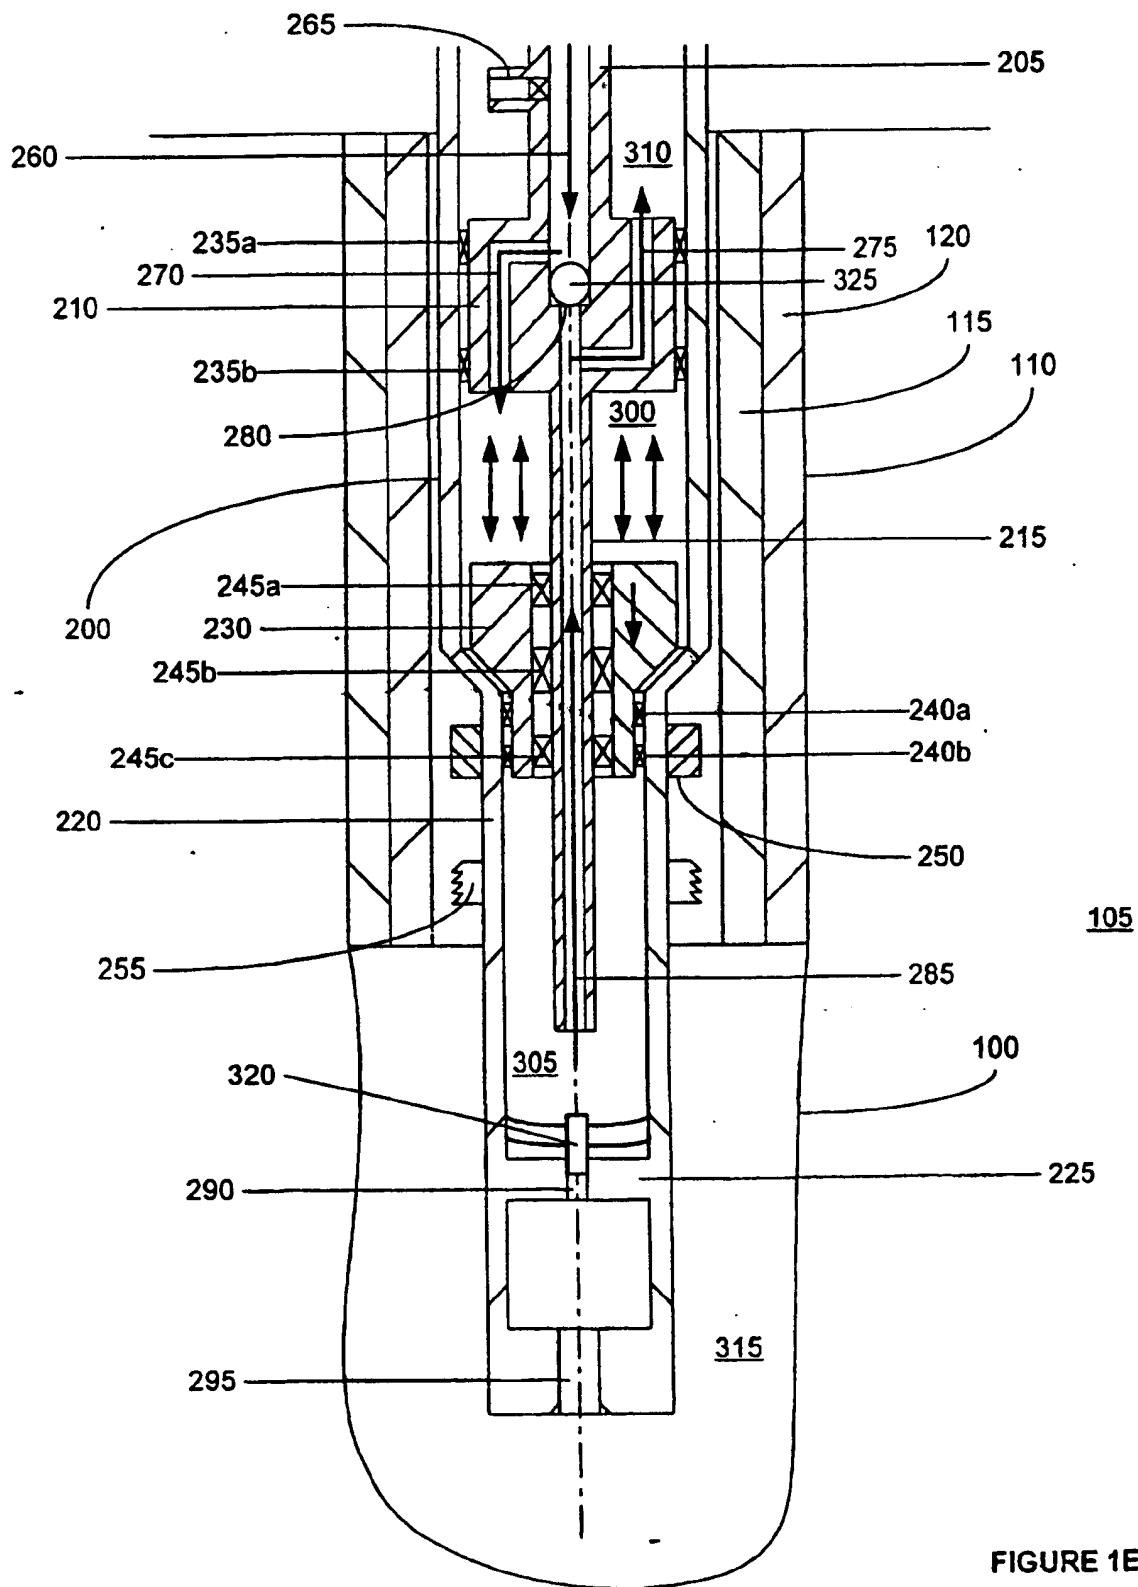


FIGURE 1E

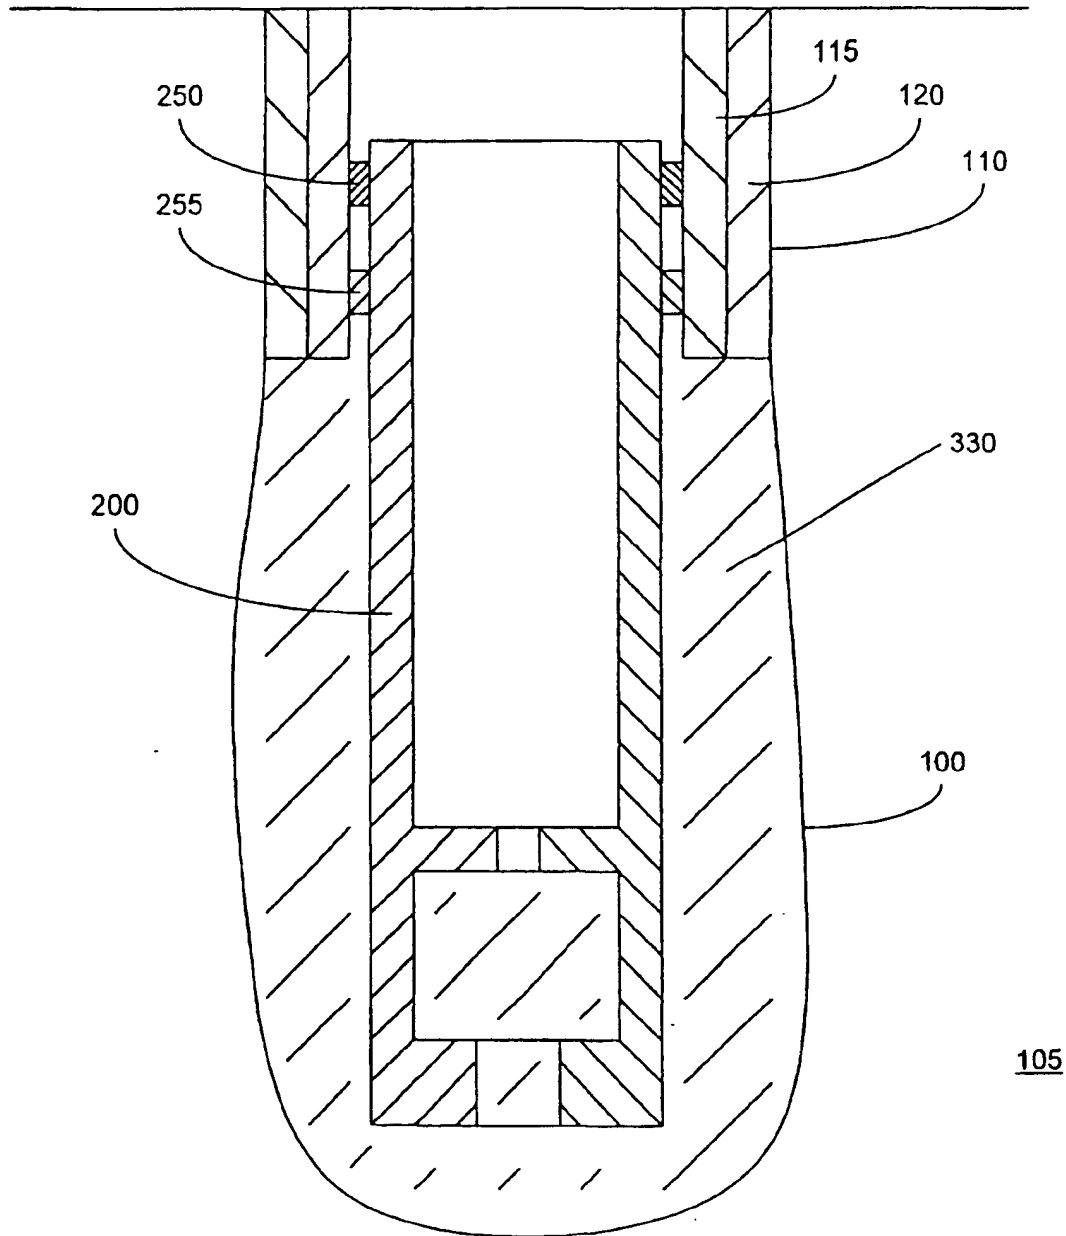


FIGURE 1F

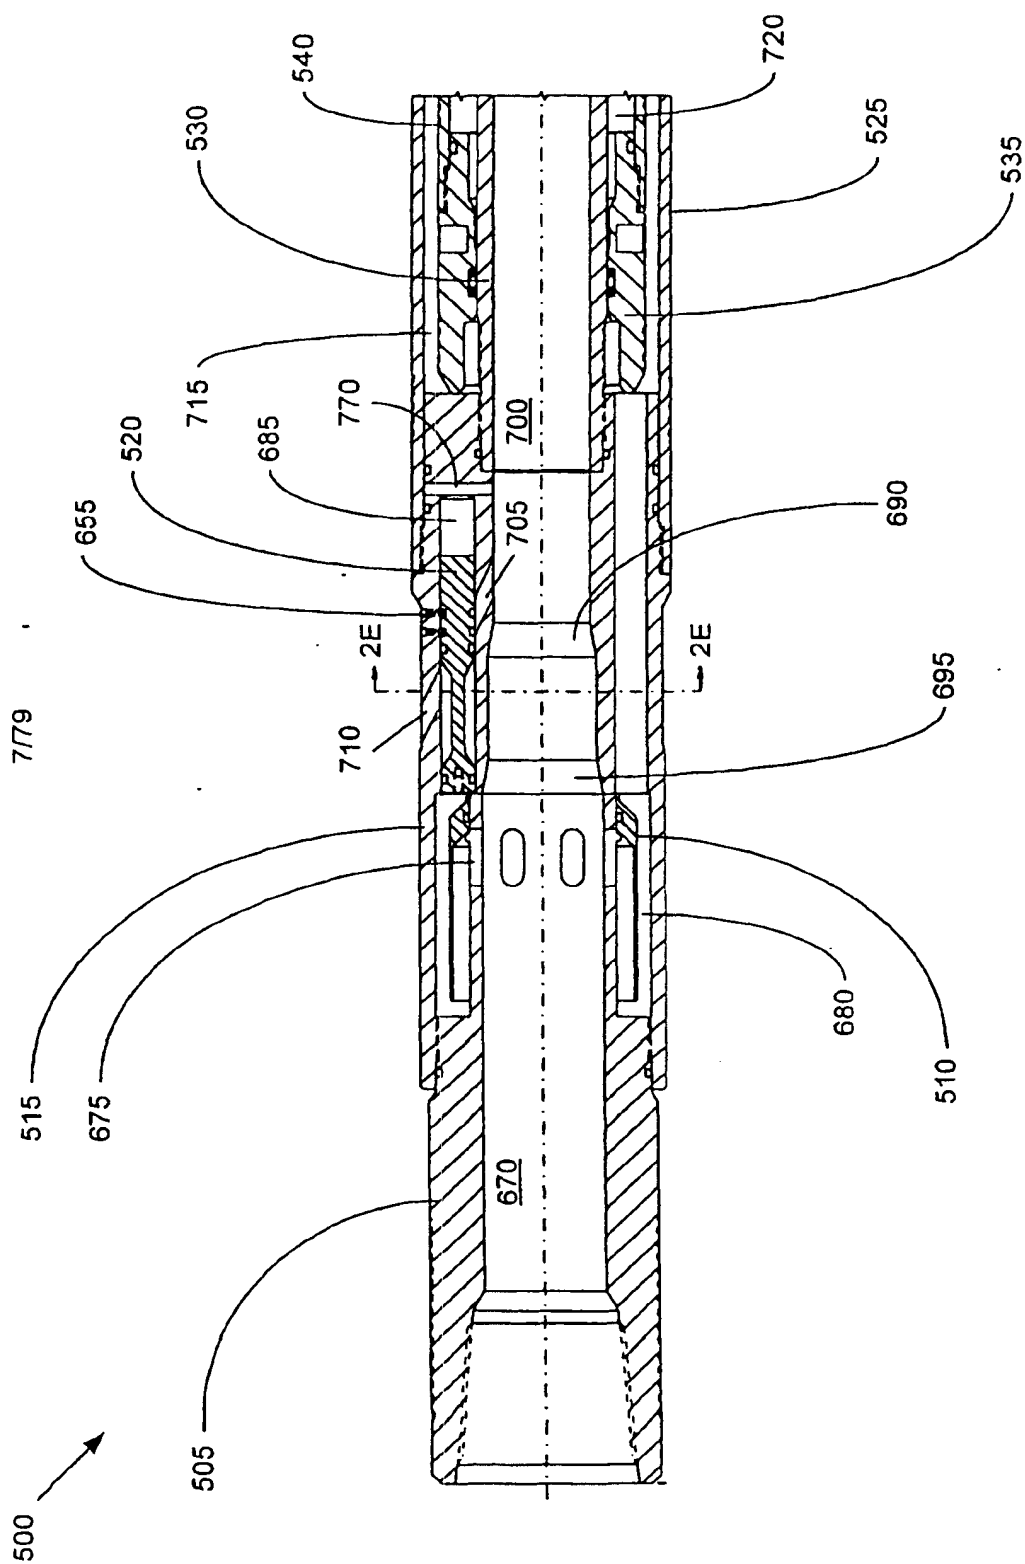


FIGURE 2A

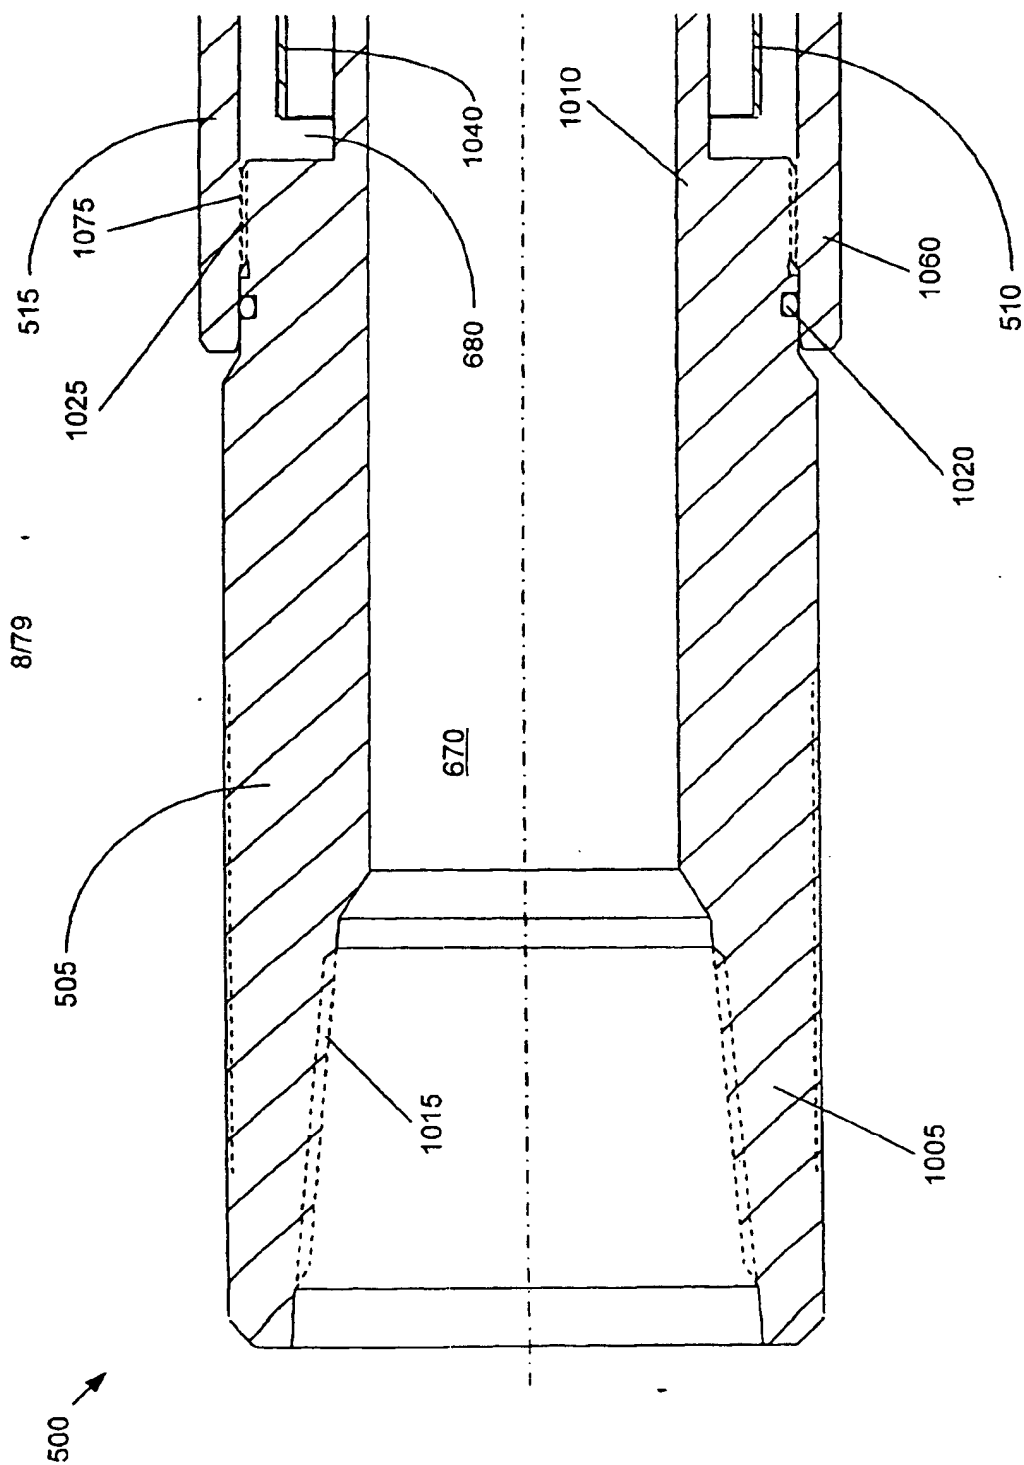


FIGURE 2B

3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842



FIGURE 2C

1d79

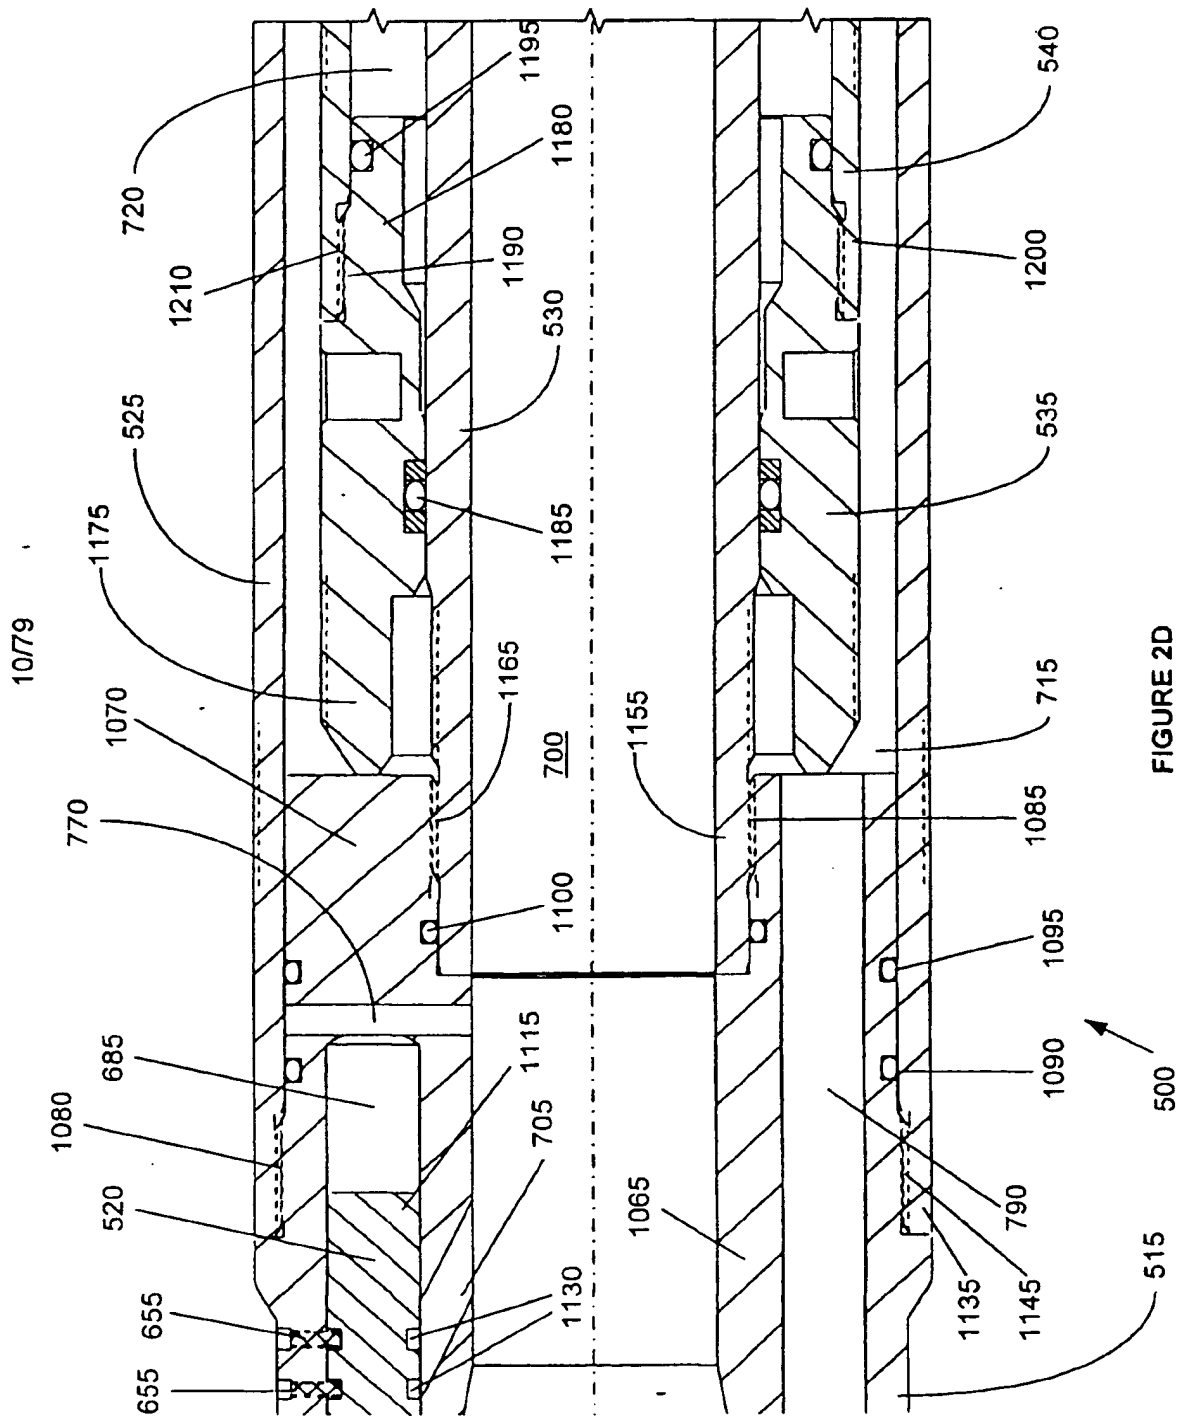


FIGURE 2D

500

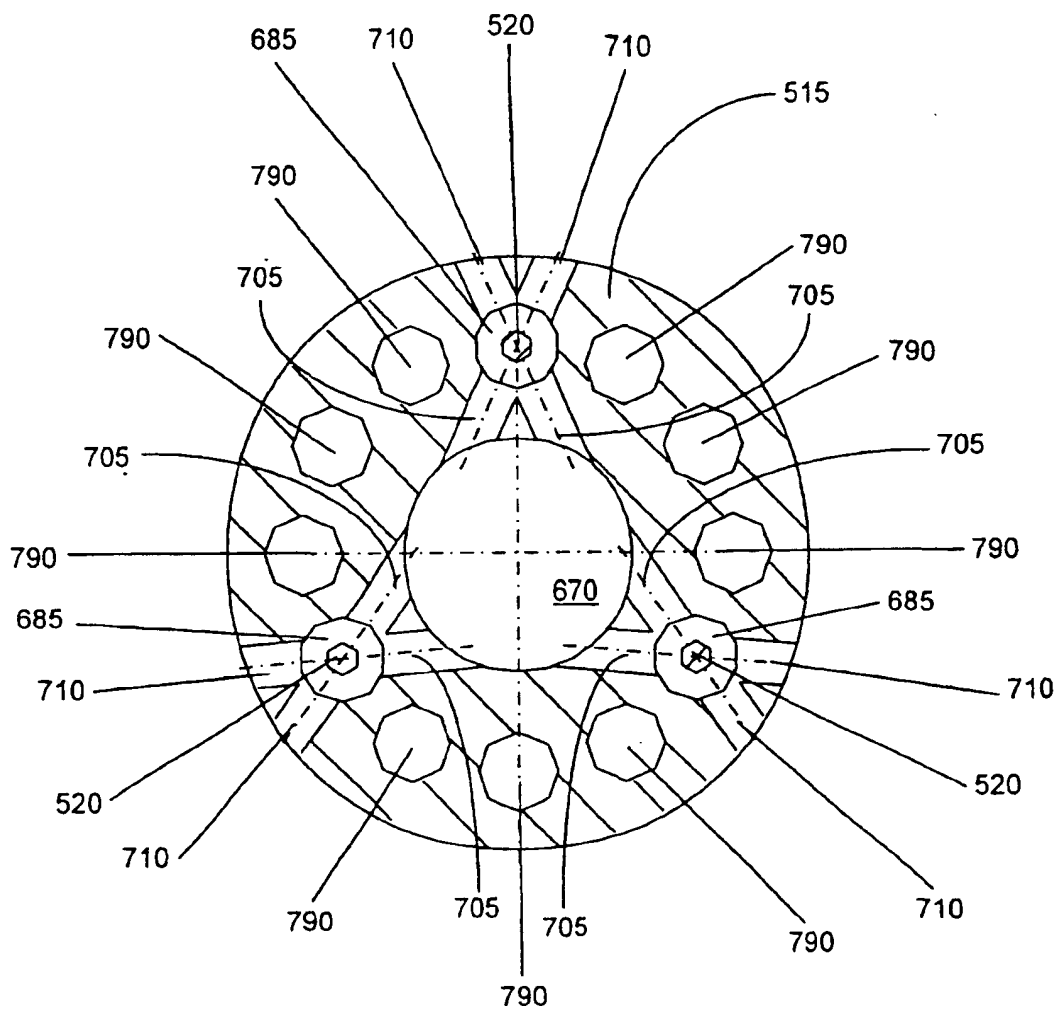


FIGURE 2E

12/79

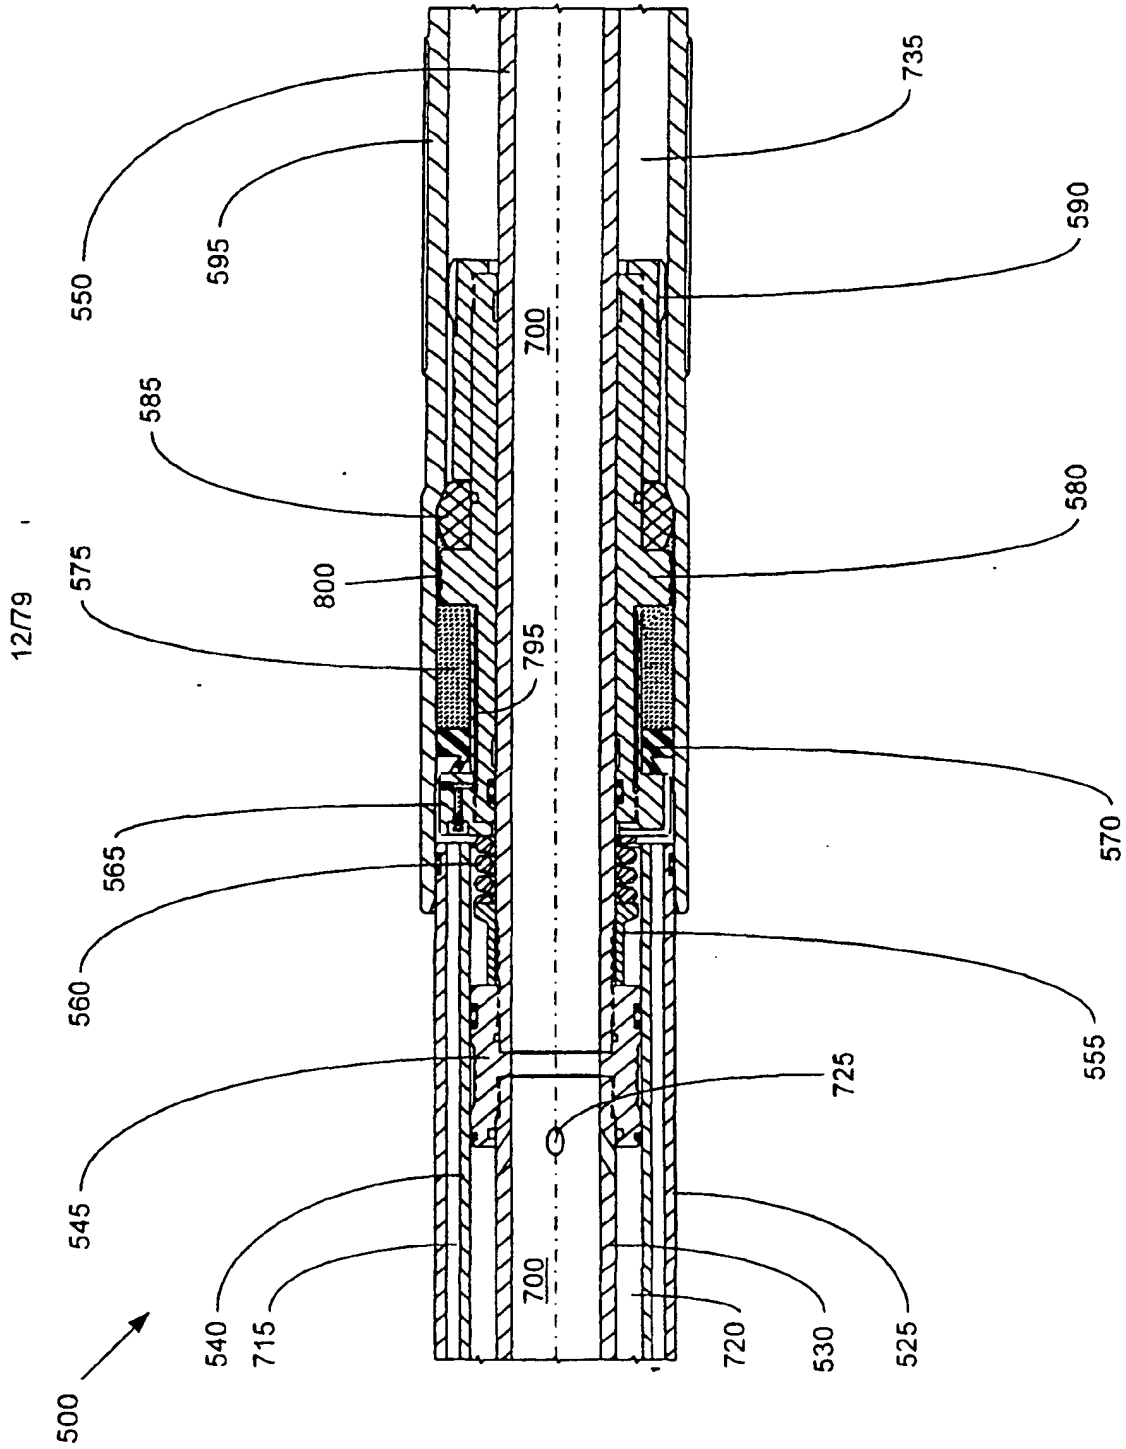


FIGURE 2F

13/79


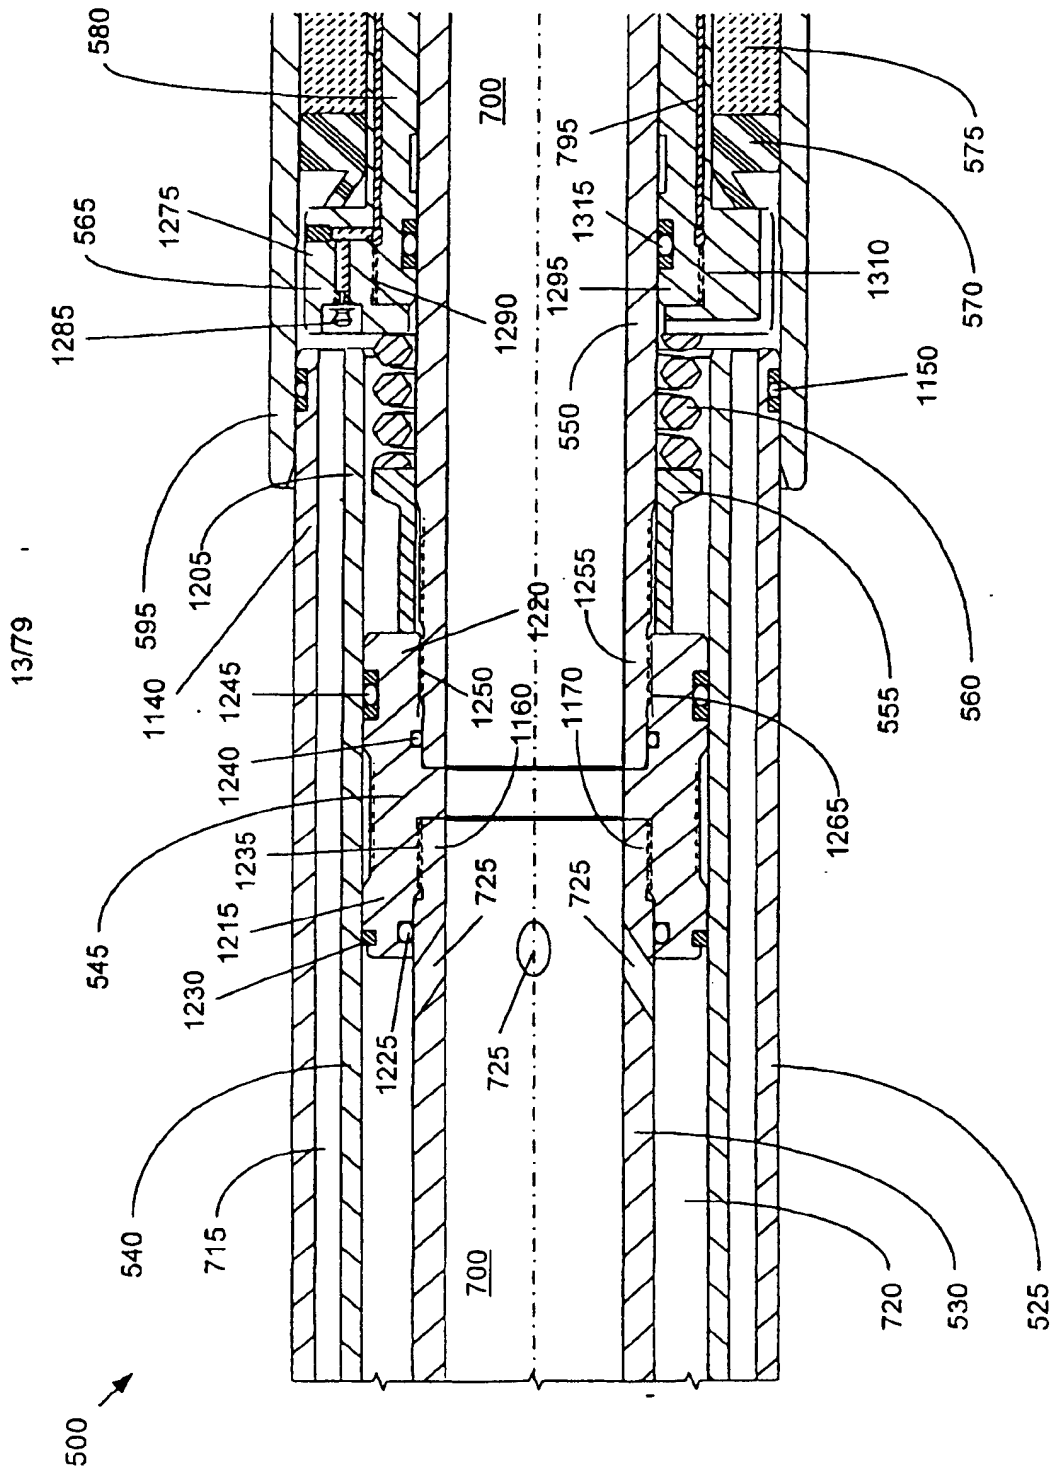


FIGURE 2G

1479



15/79

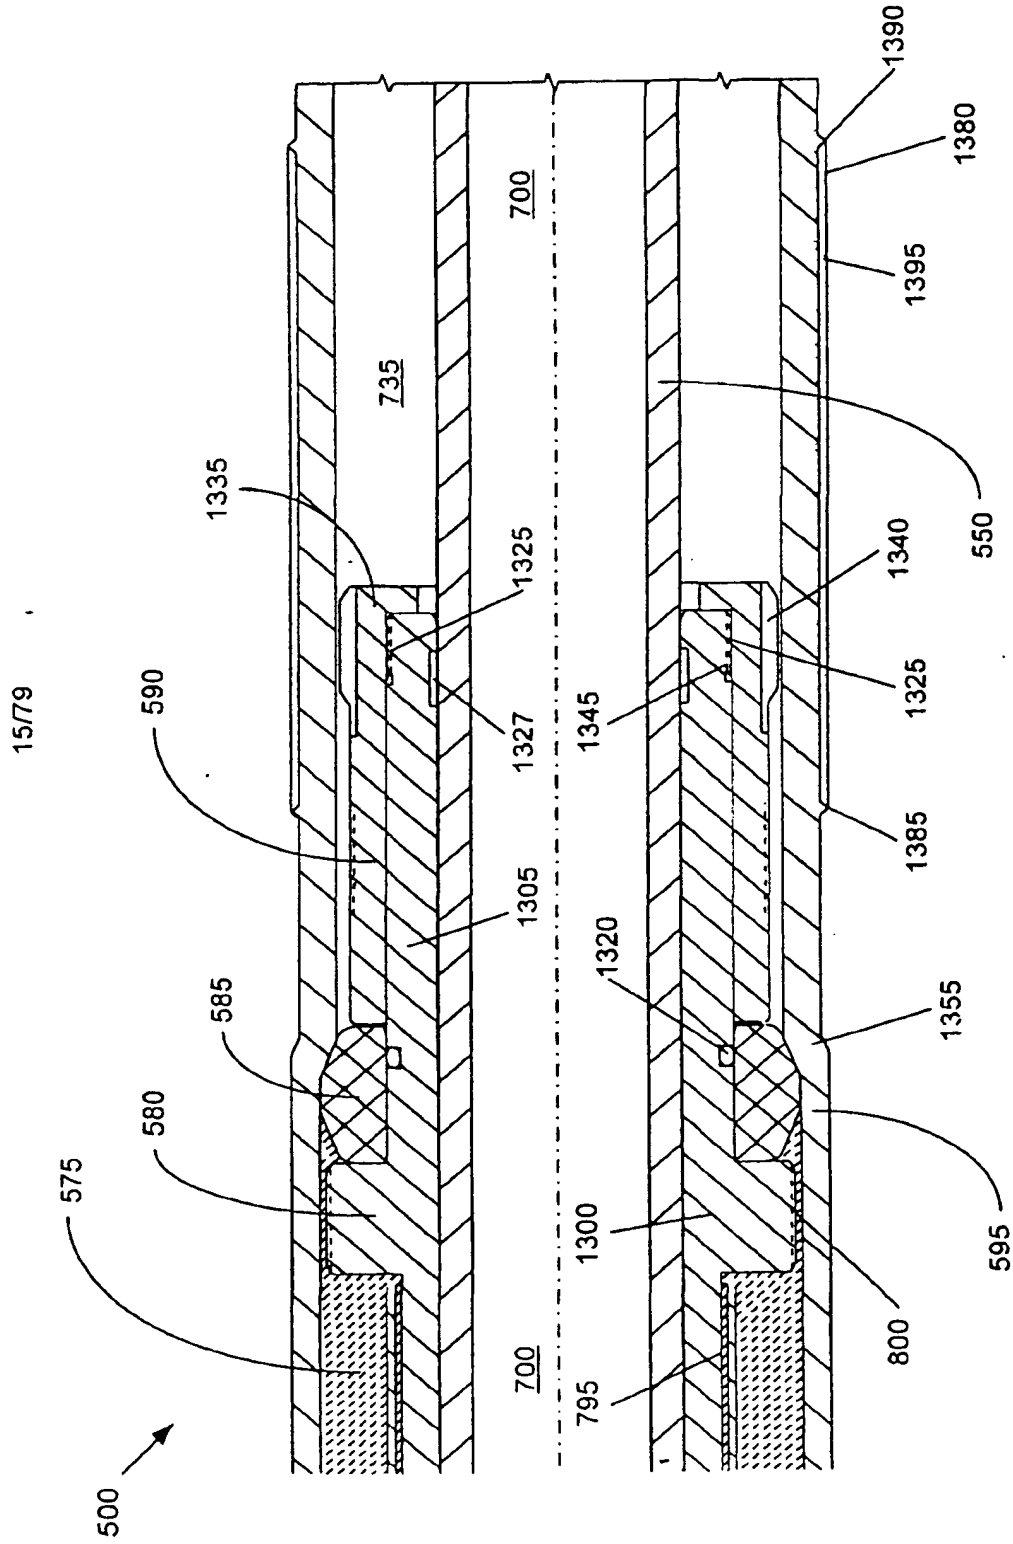


FIGURE 2I

16/79

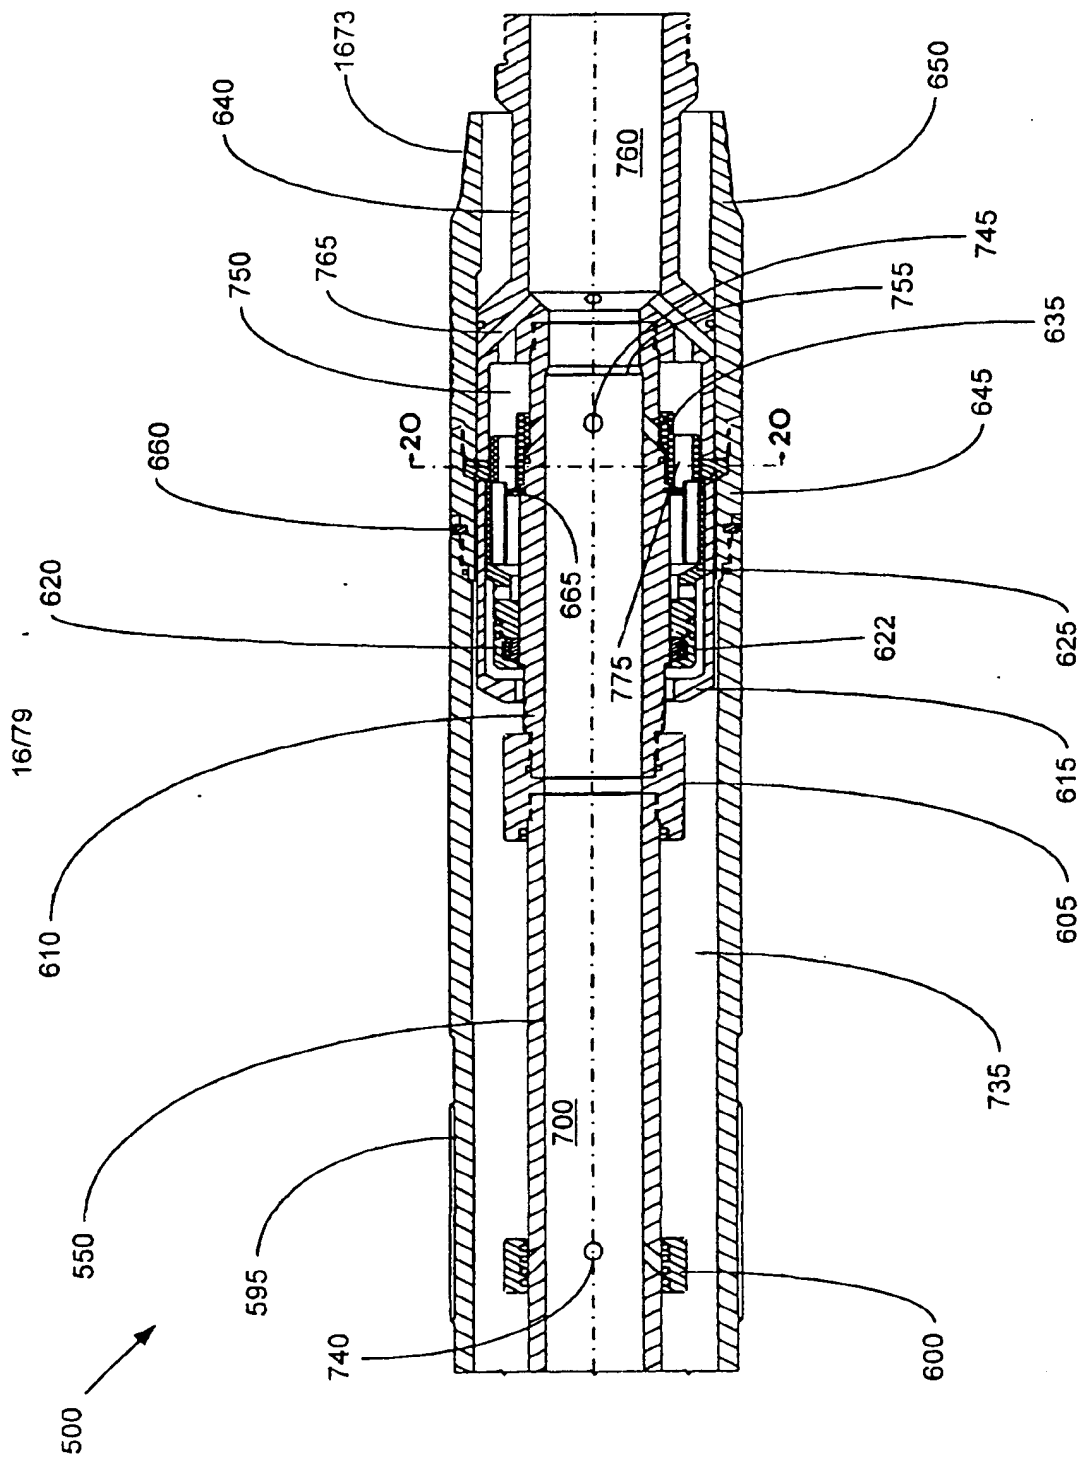


FIGURE 2J

17(79

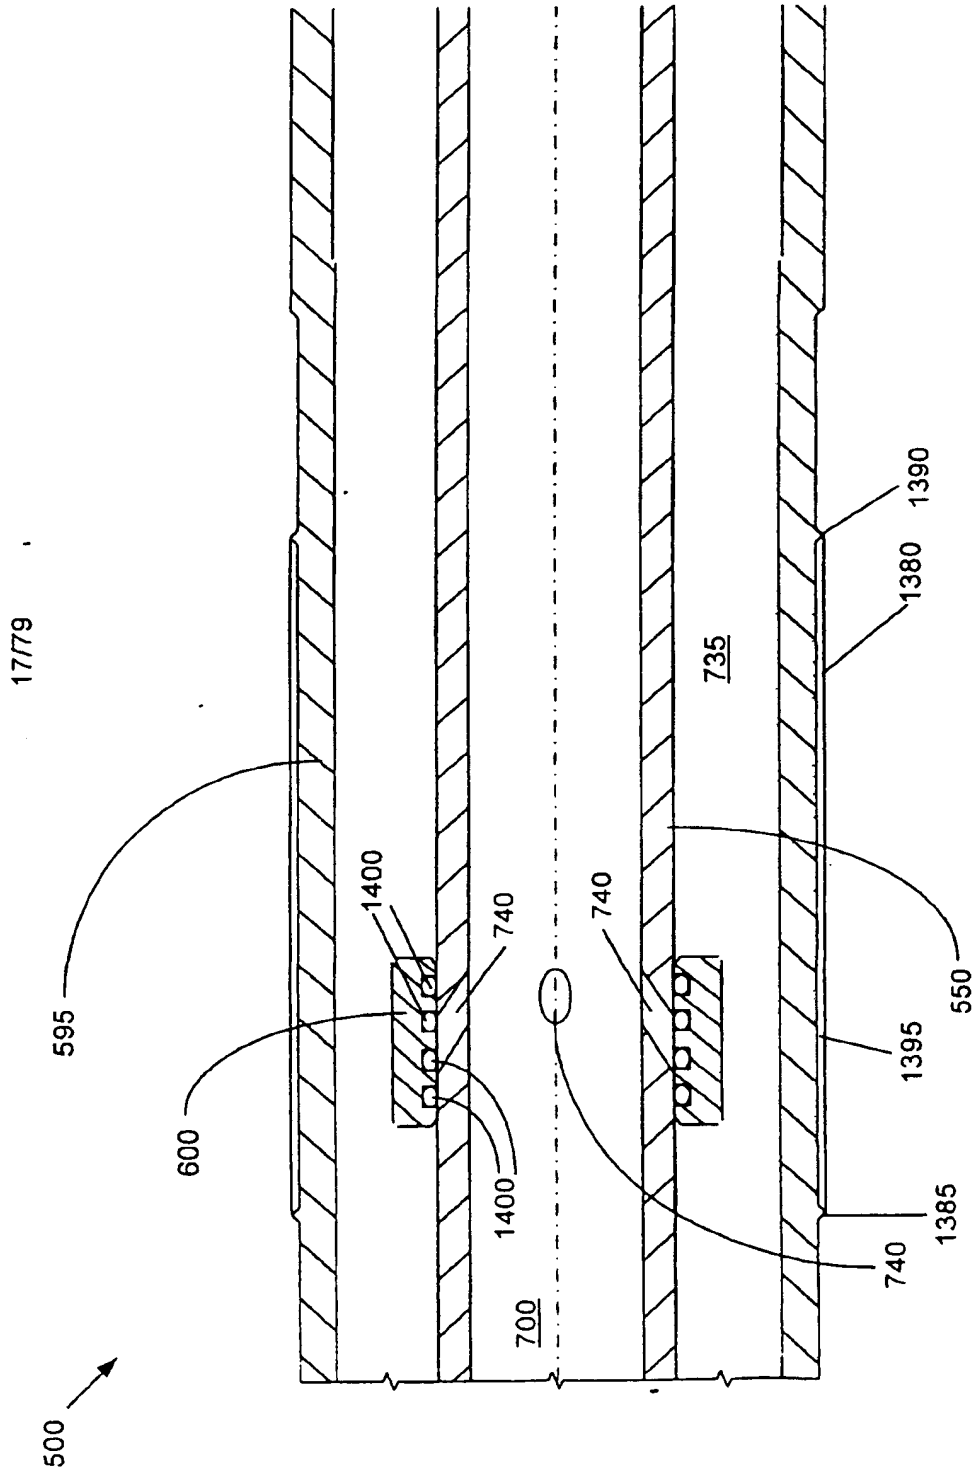


FIGURE 2K

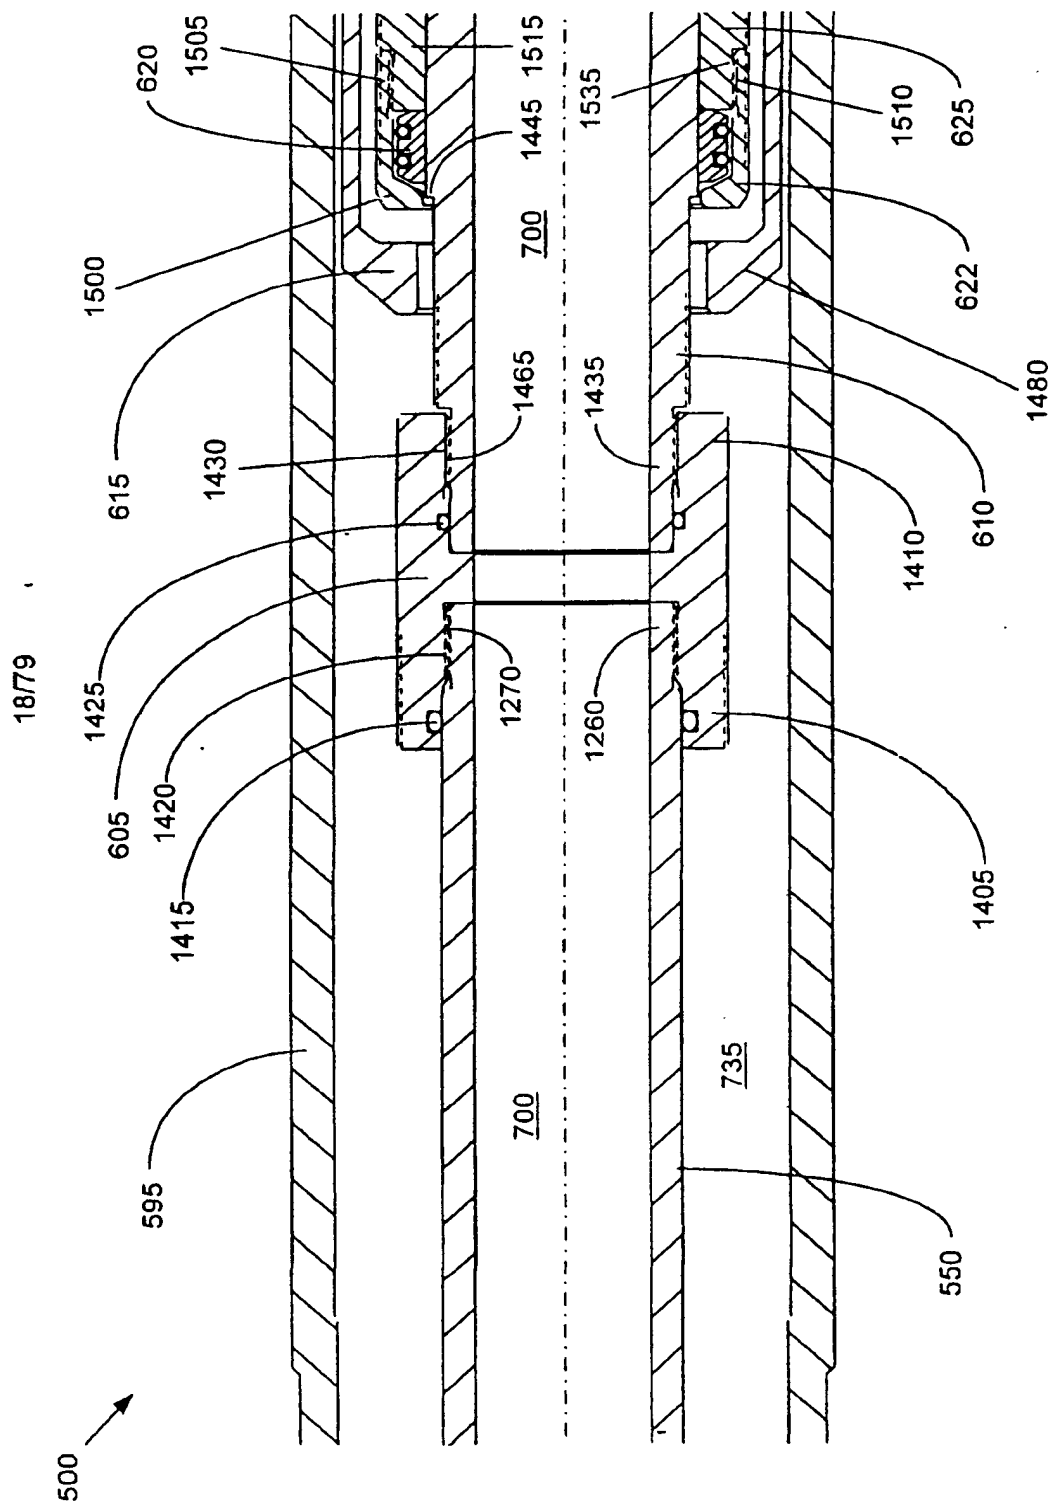


FIGURE 2L




FIGURE 2M

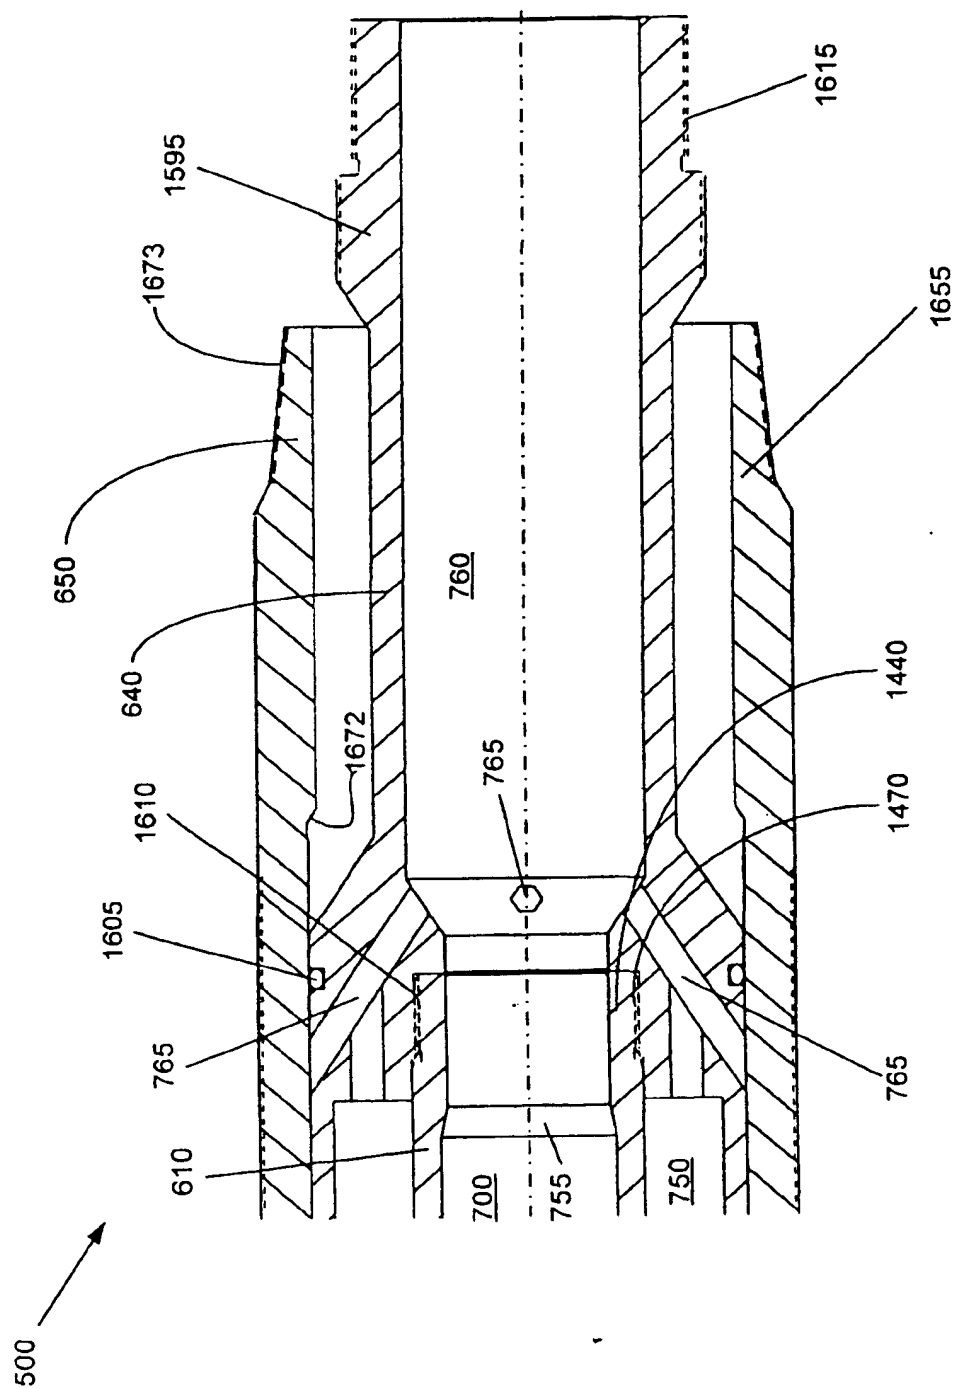


FIGURE 2N




FIGURE 20

22/79

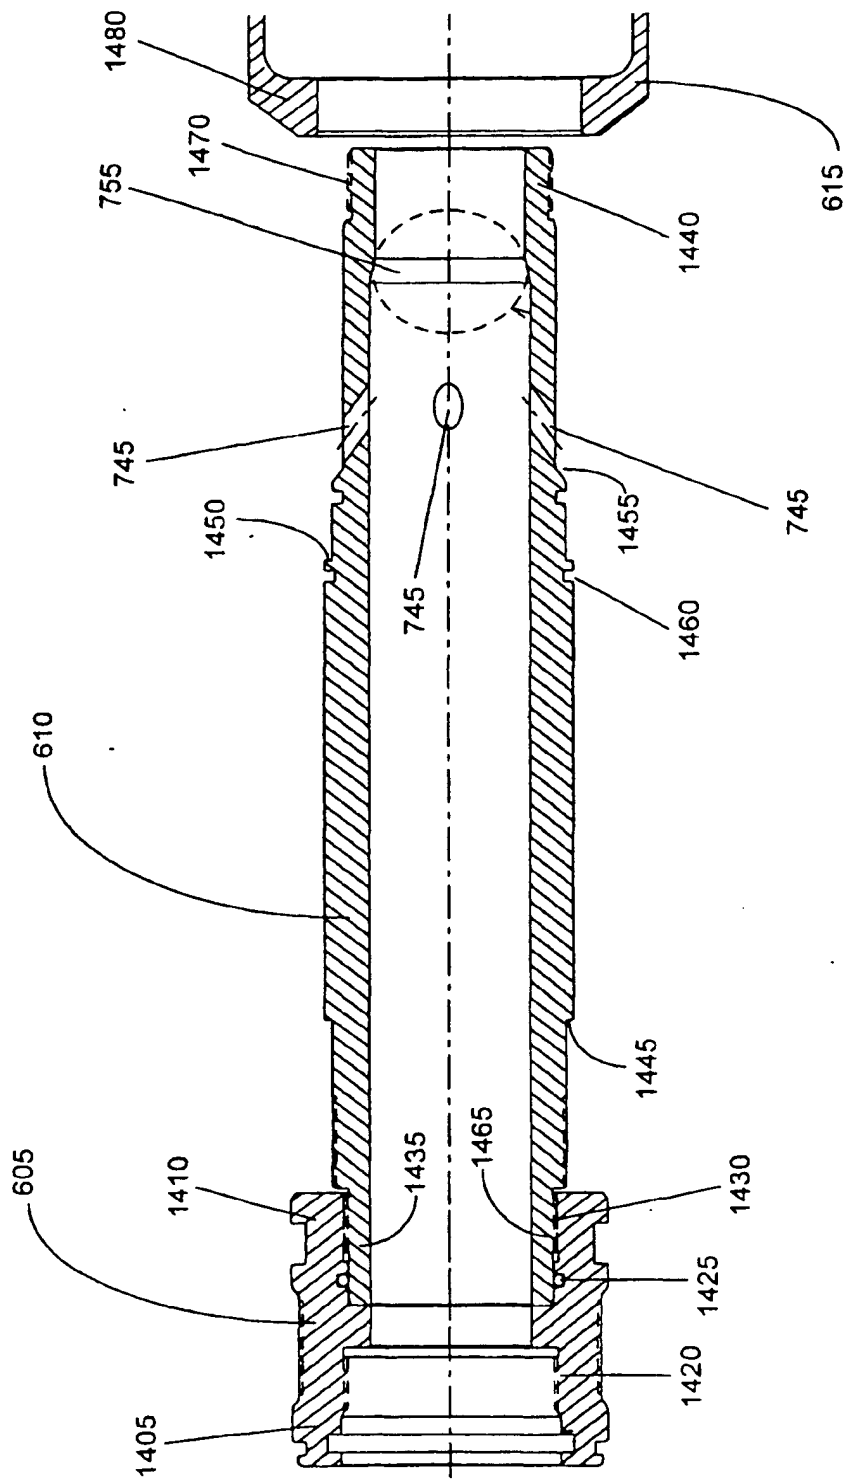


FIGURE 3A

23/79

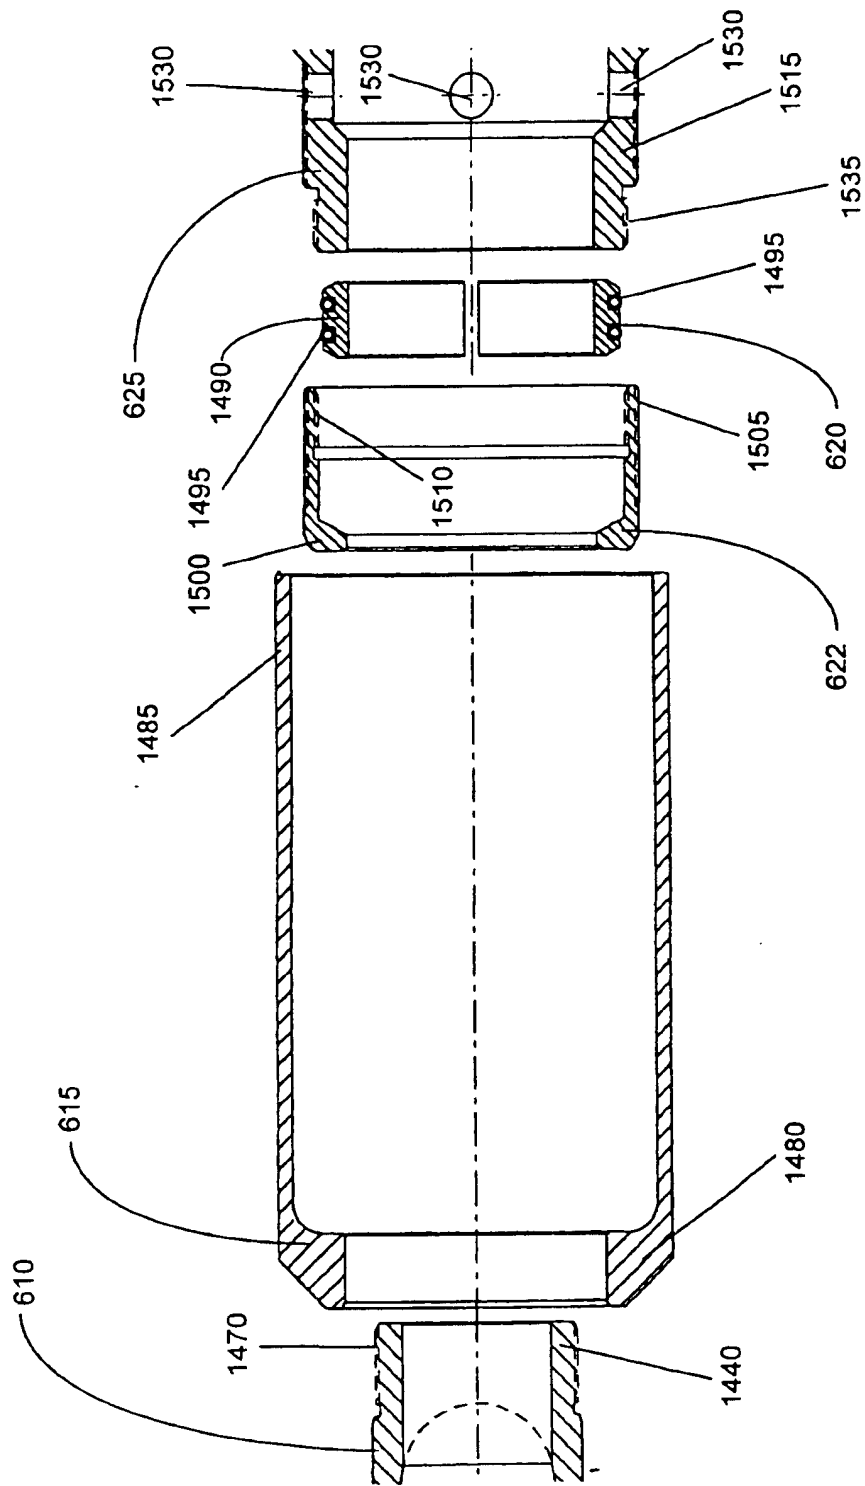


FIGURE 3B

24/79

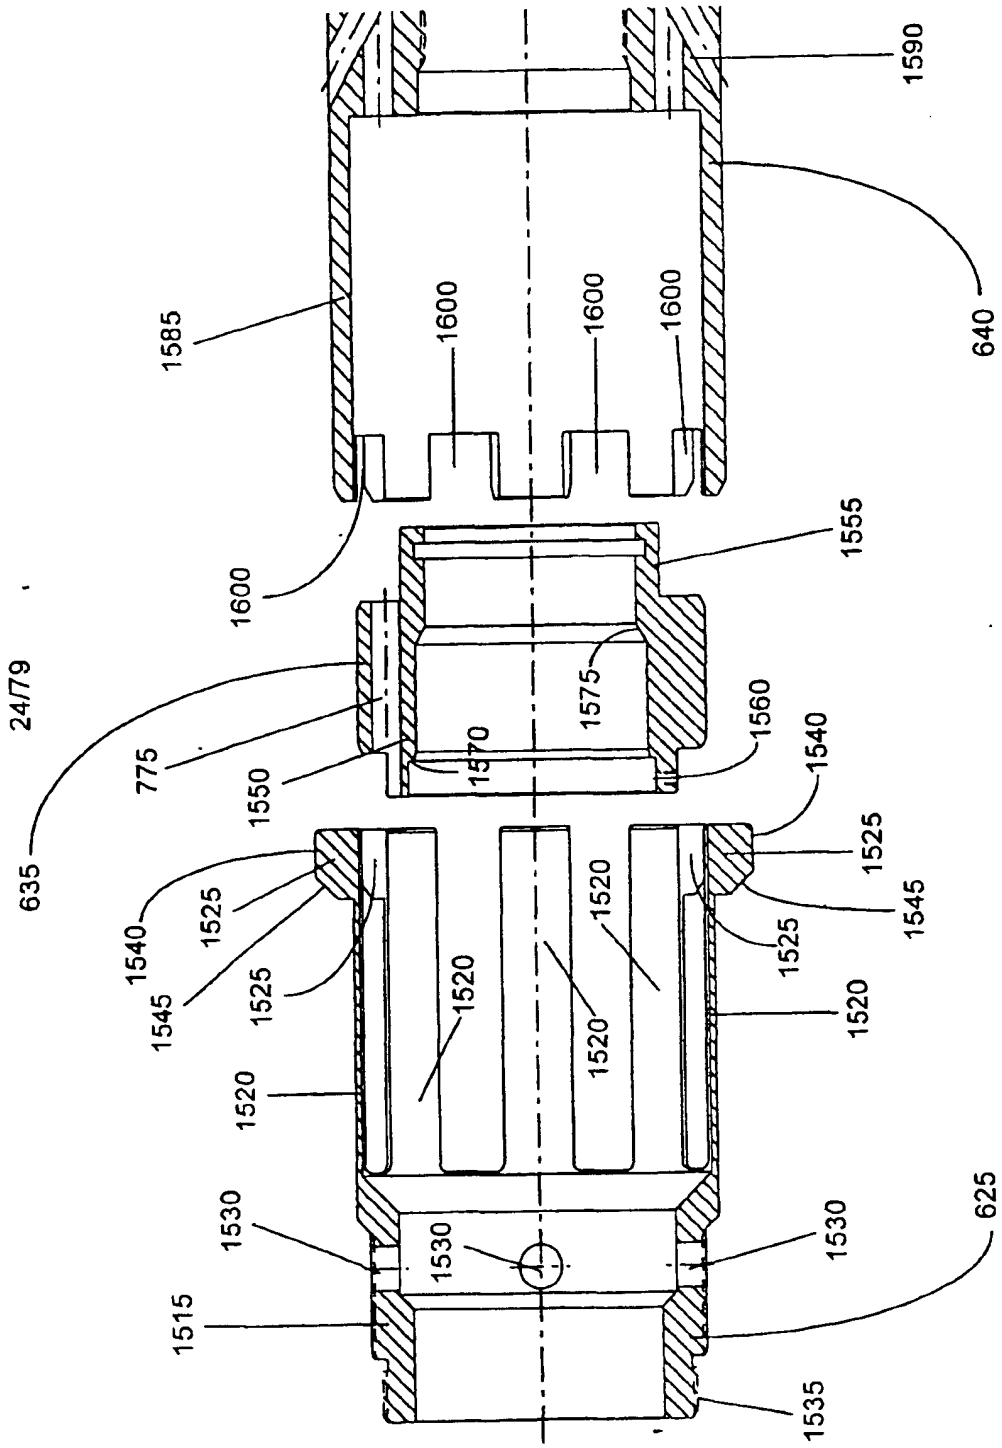


FIGURE 3C

25/79

25/79

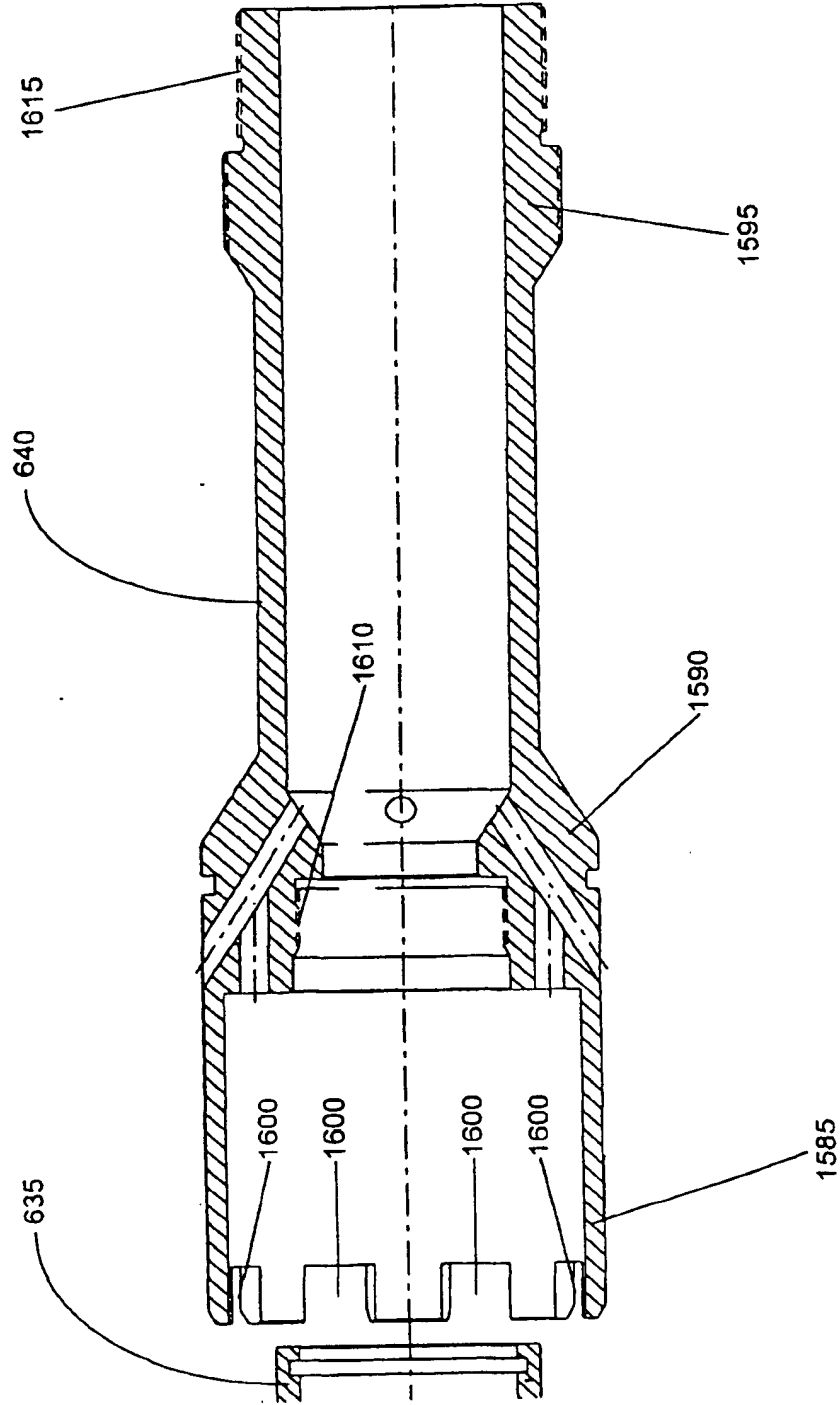


FIGURE 3D

26179

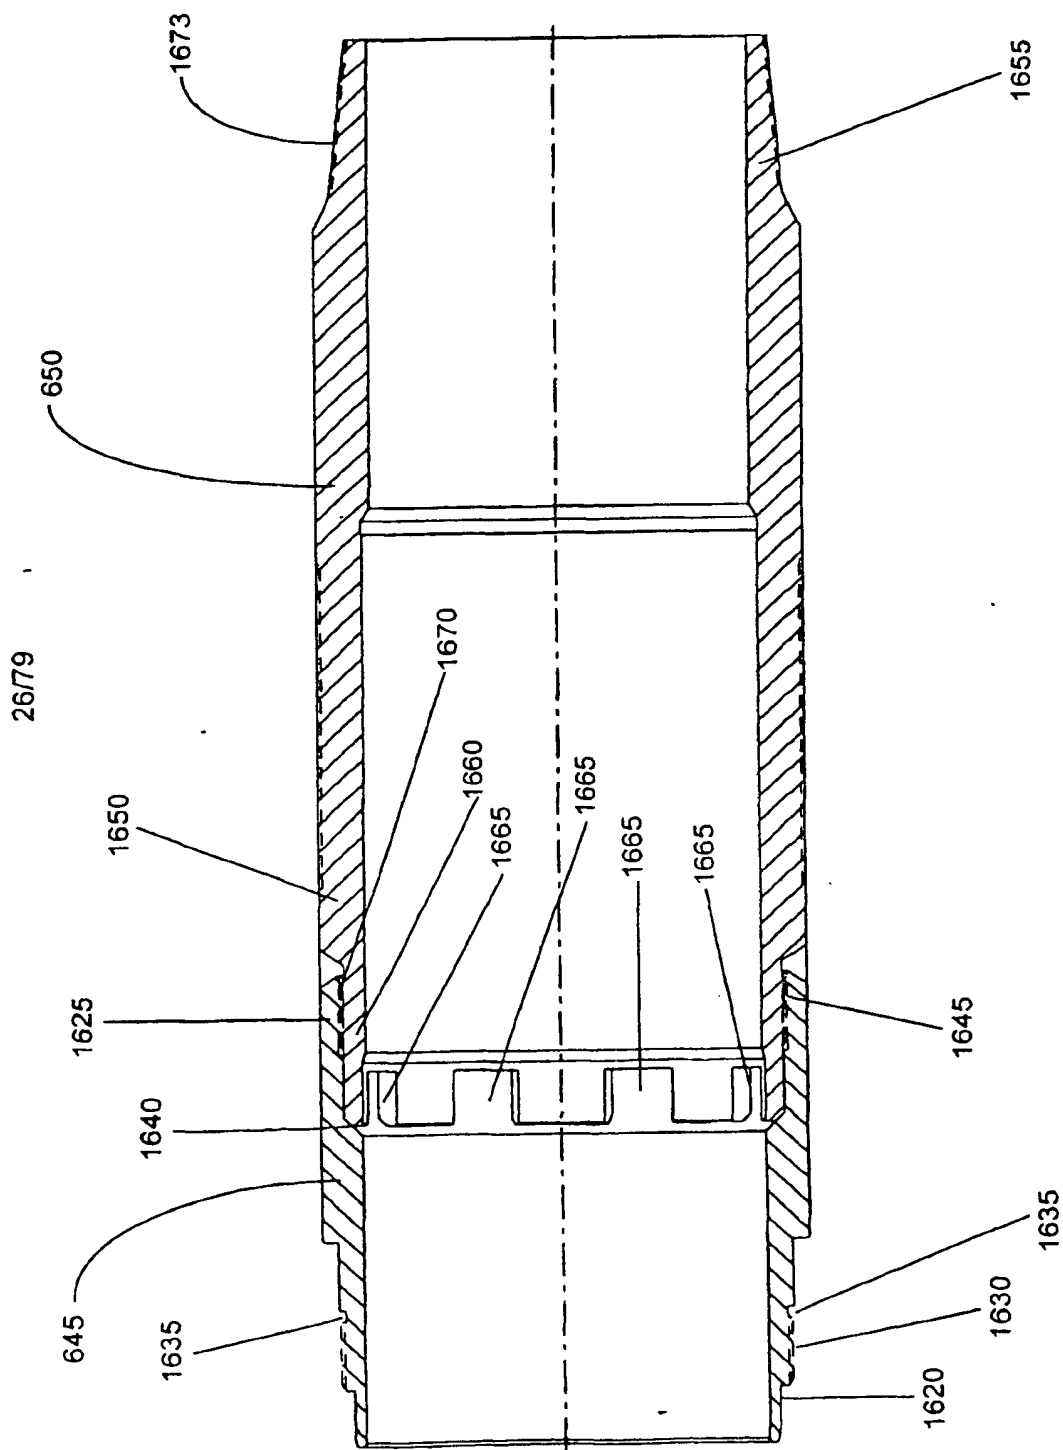


FIGURE 3E

27/79

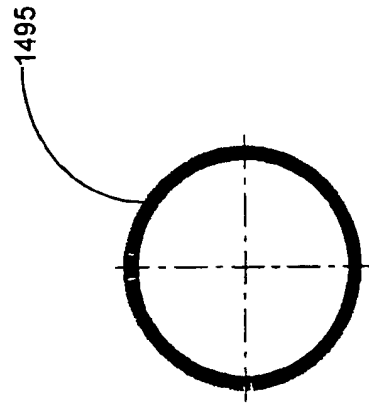


FIGURE 3F

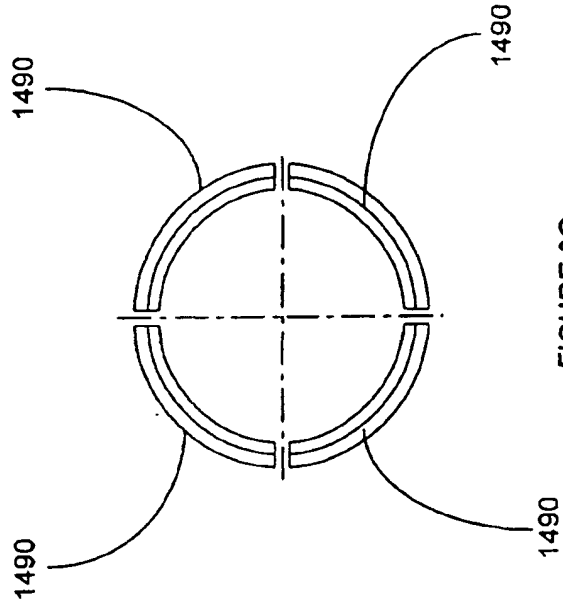


FIGURE 3G

28/79

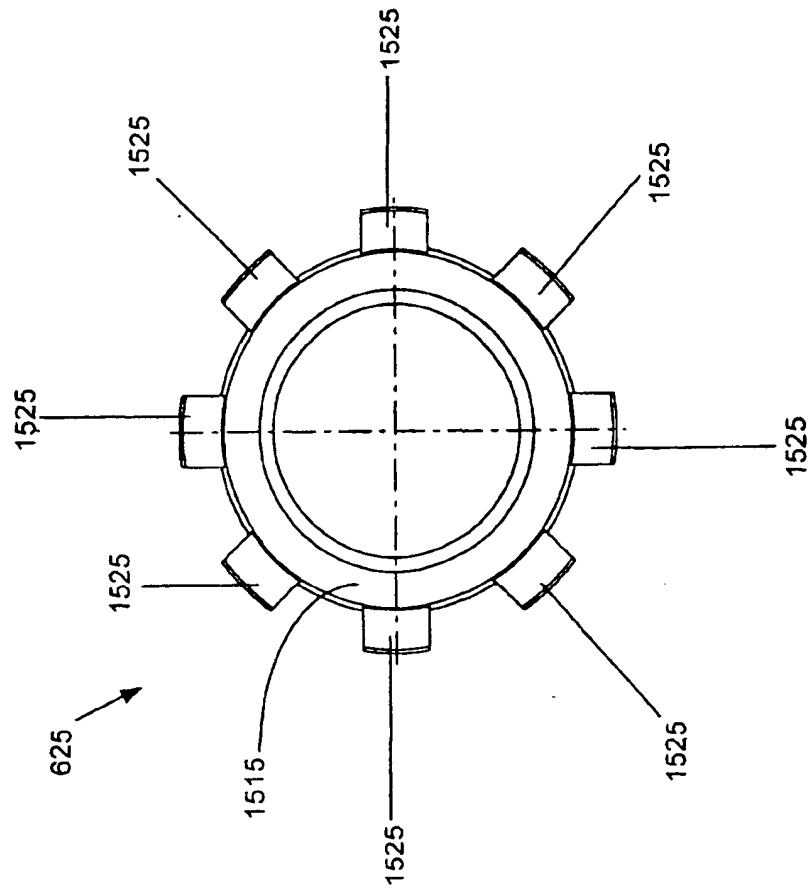


FIGURE 3H

29/19

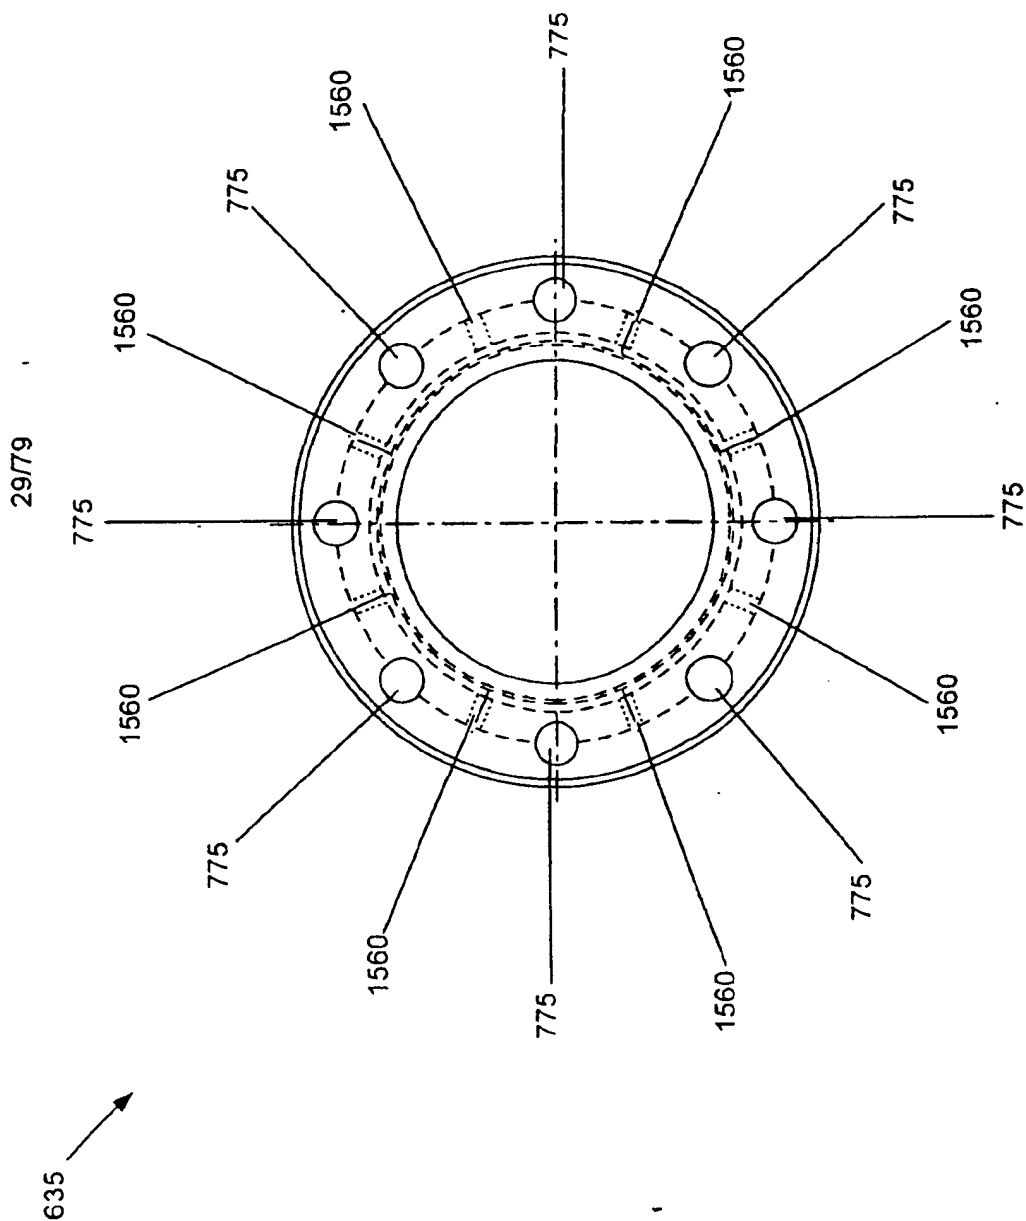


FIGURE 3I

30119

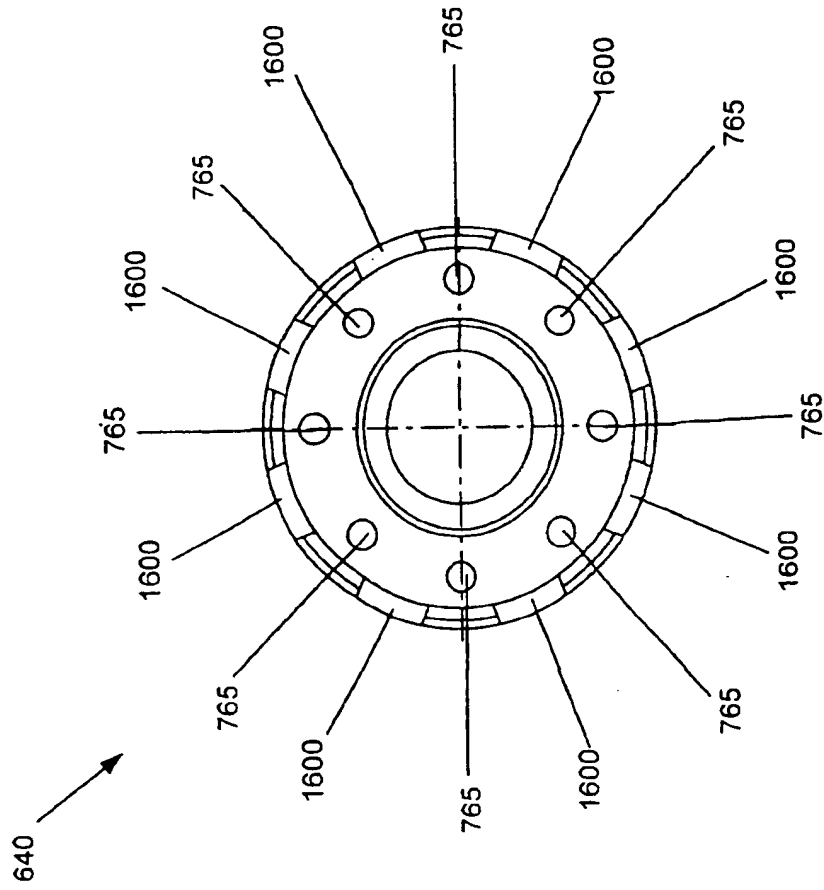


FIGURE 3J

3179

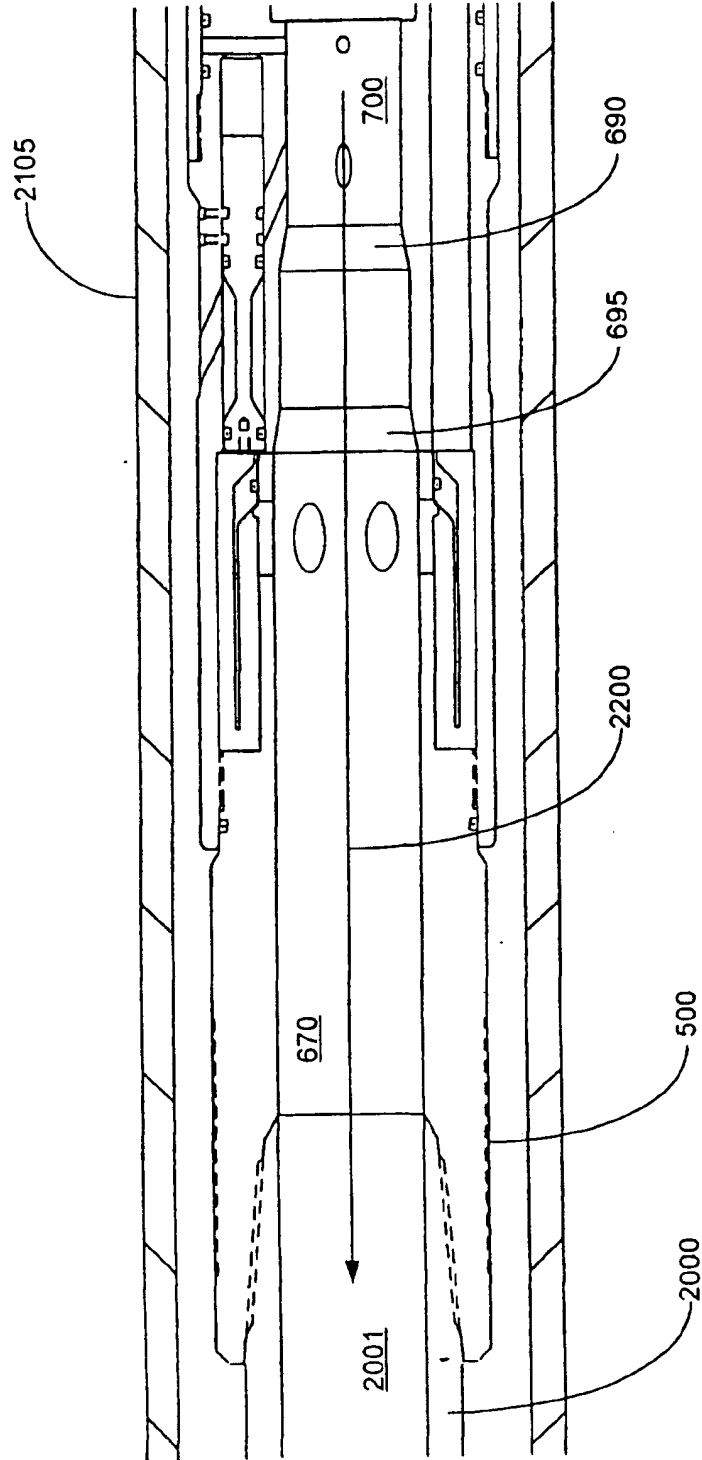


FIGURE 4A

32(79

32/79

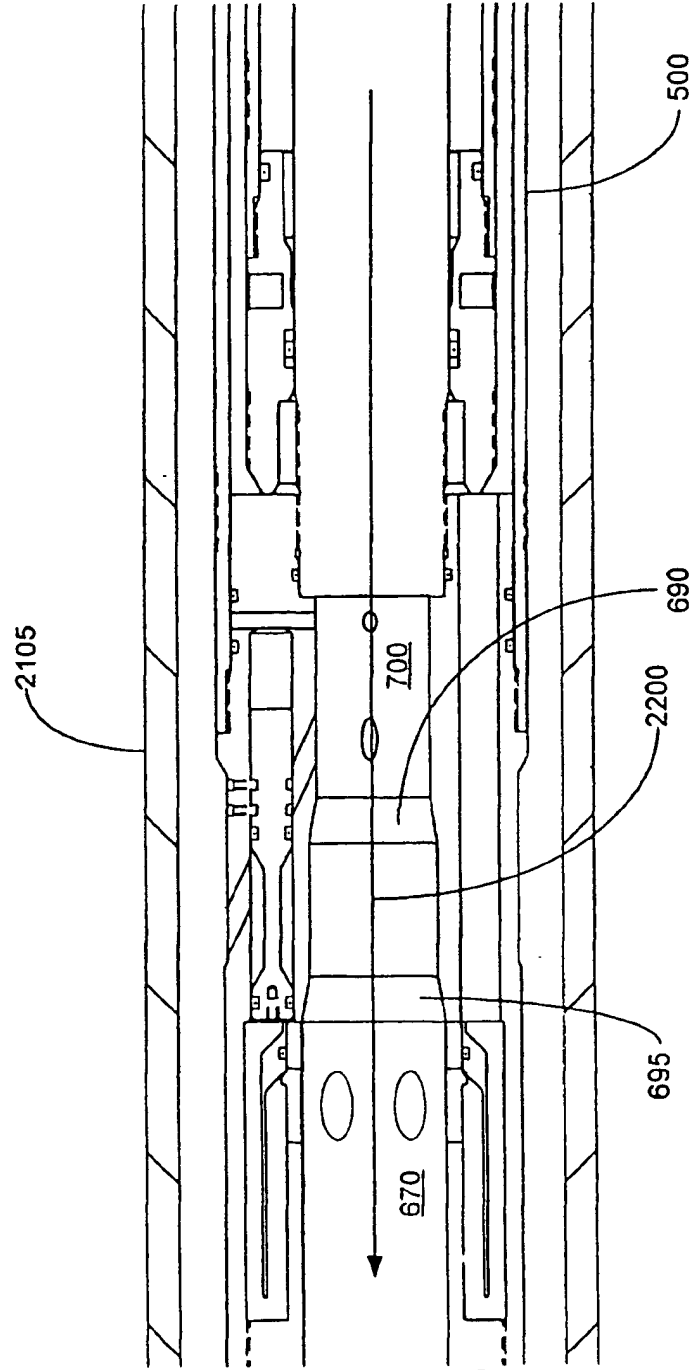


FIGURE 4B

33/79

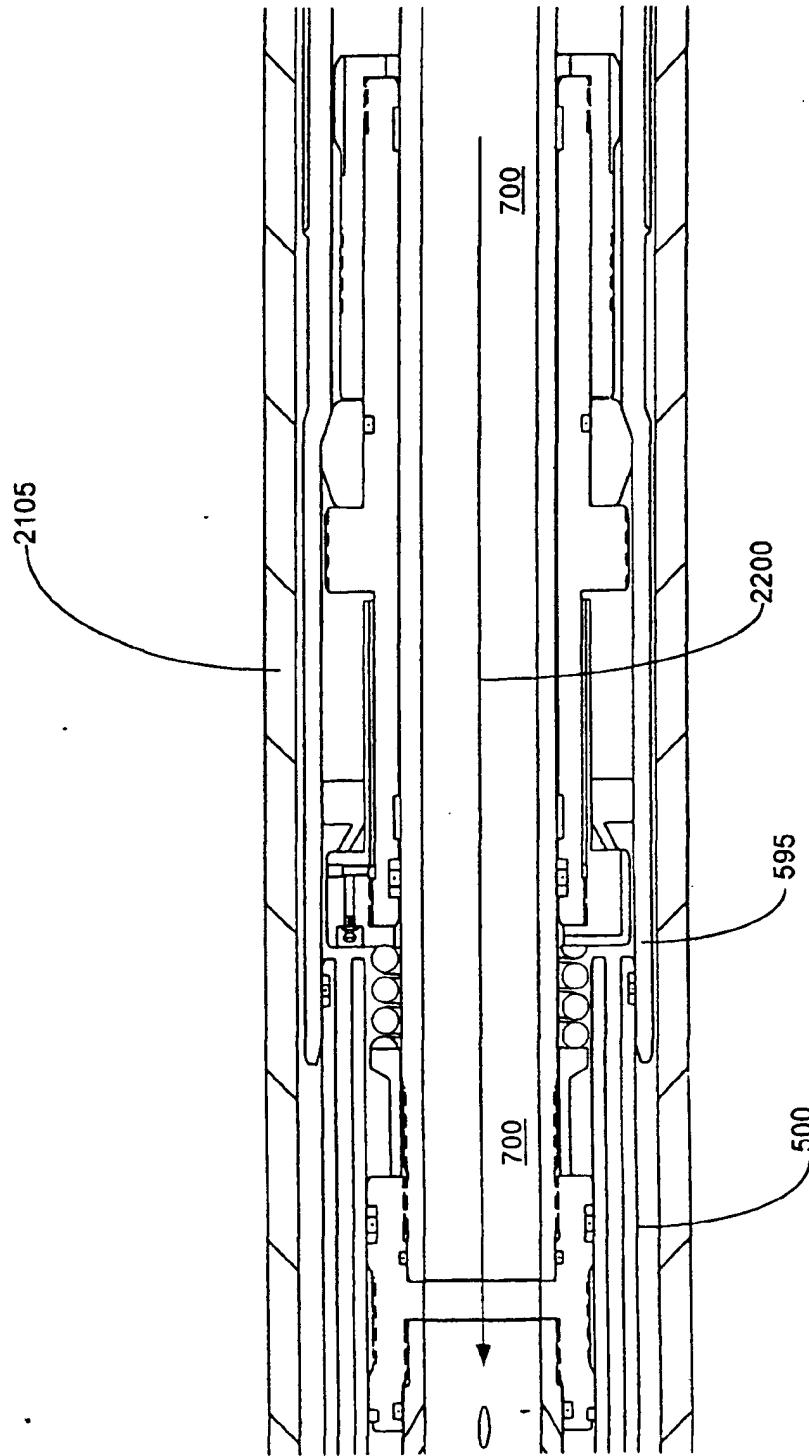


FIGURE 4C

3479

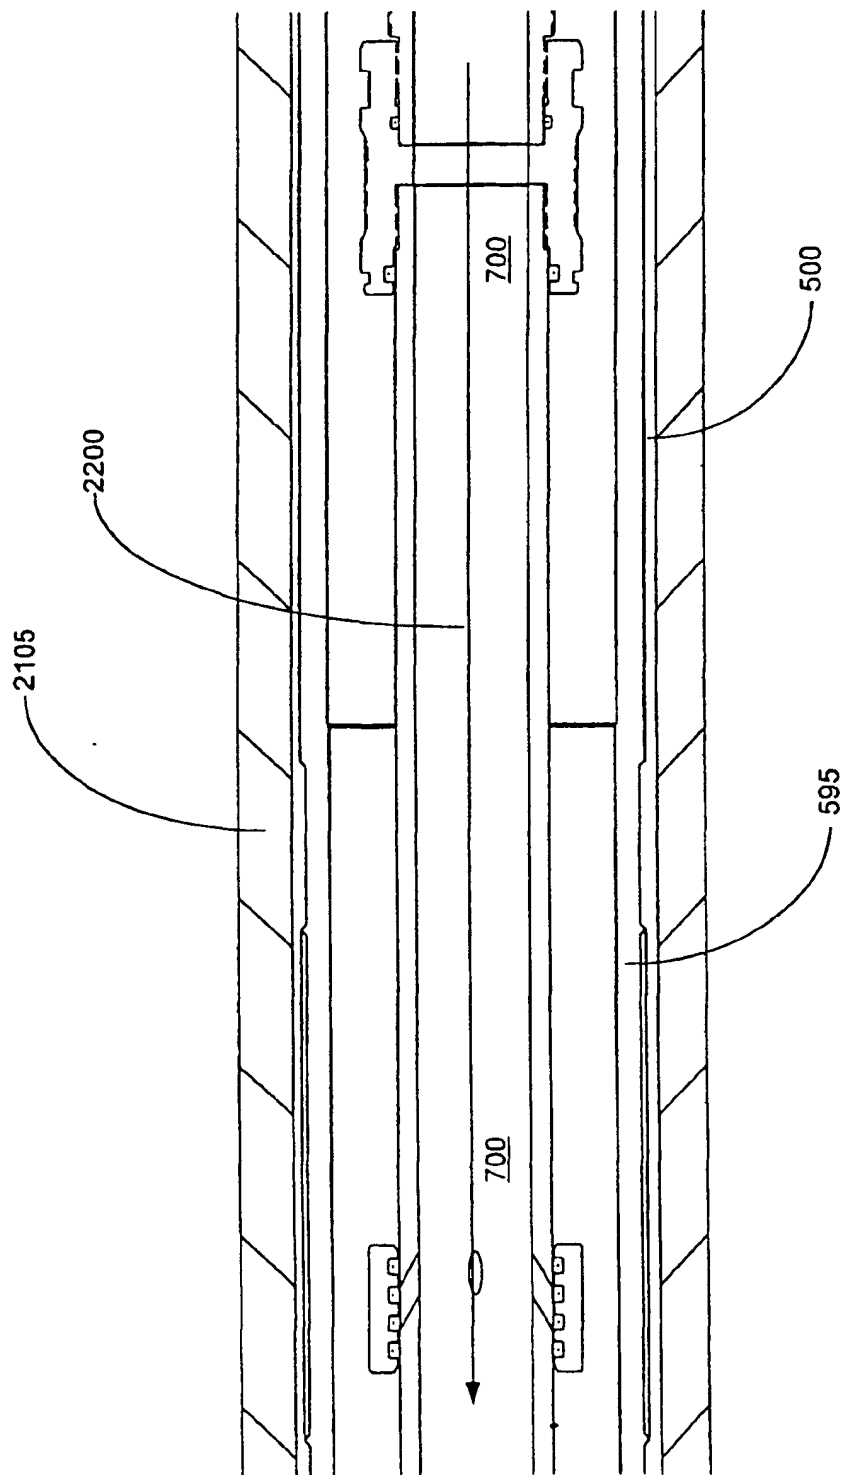


FIGURE 4D



FIGURE 4E

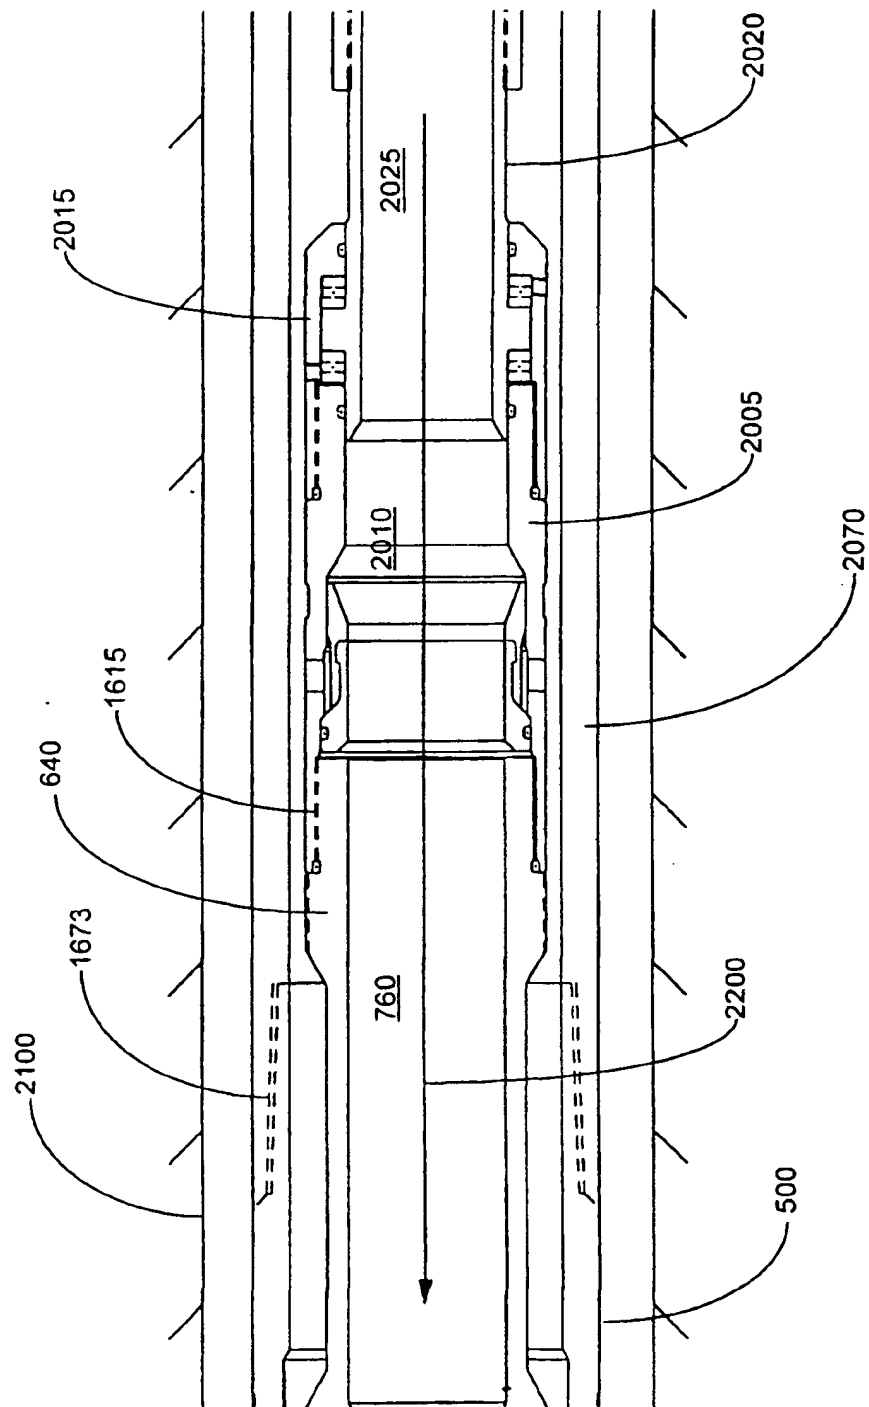


FIGURE 4F

3779

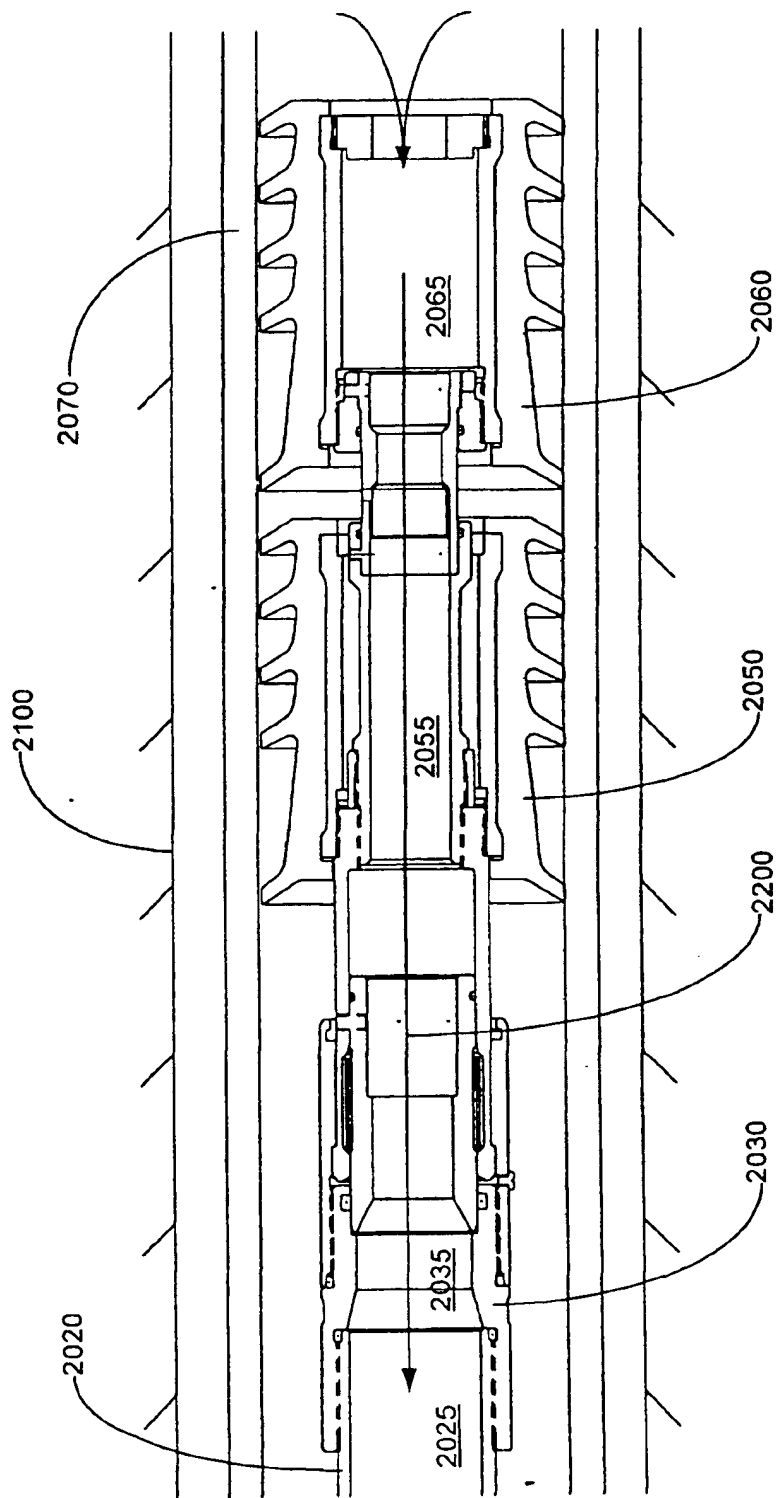


FIGURE 4G

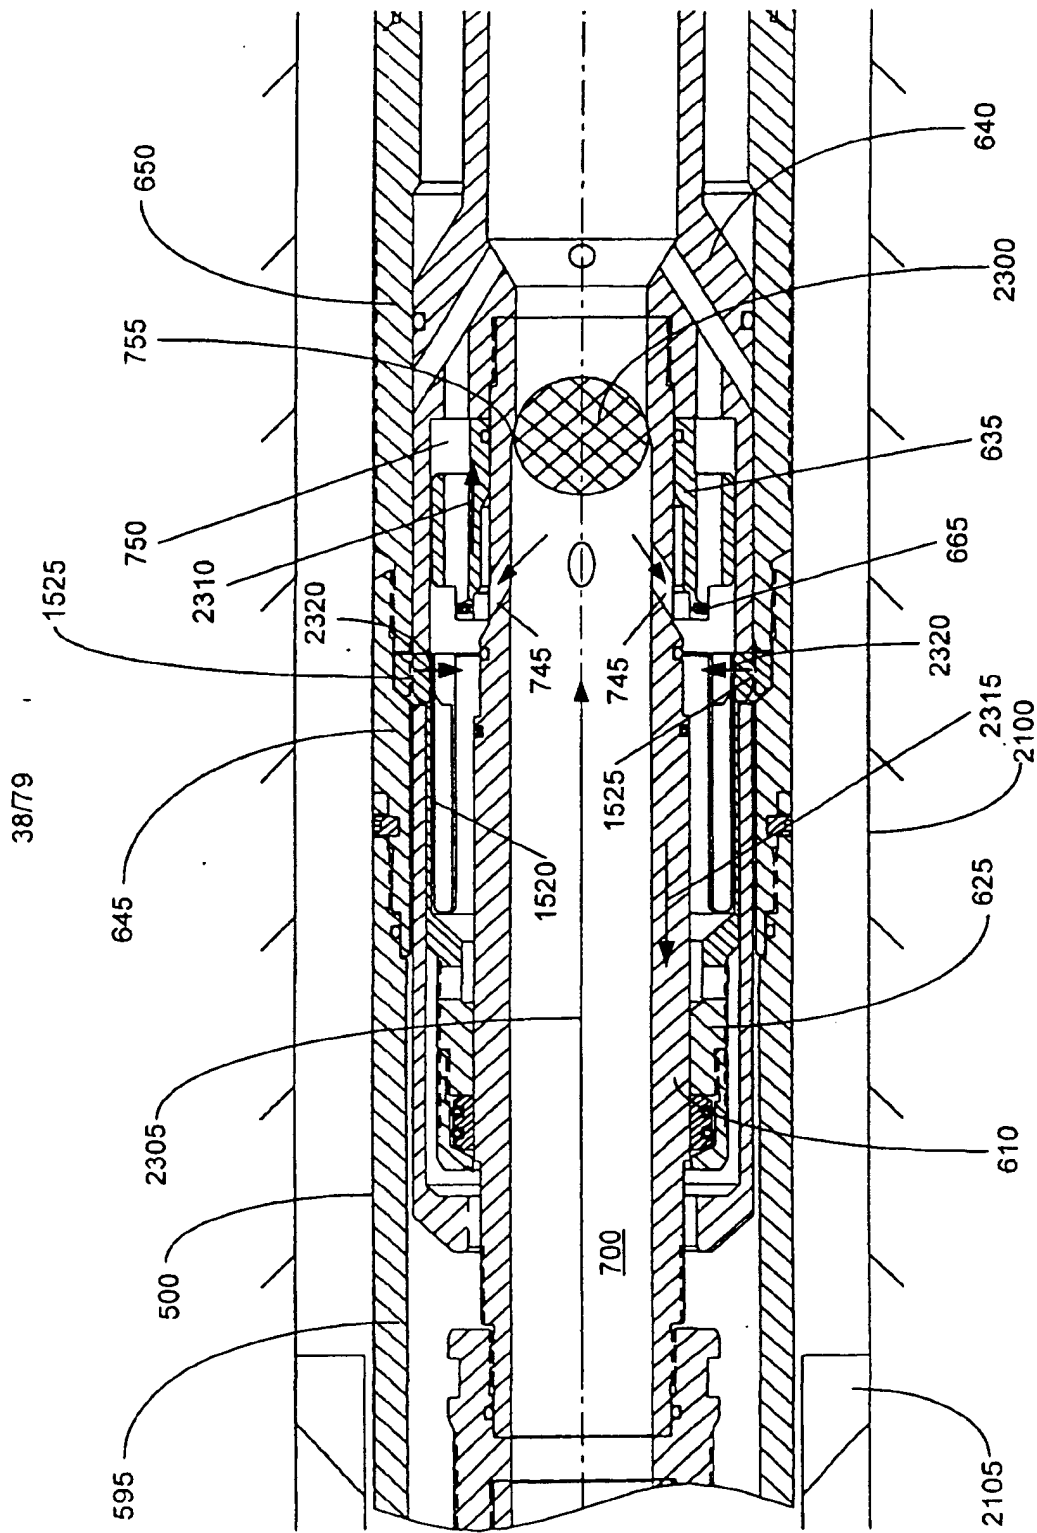


FIGURE 5A

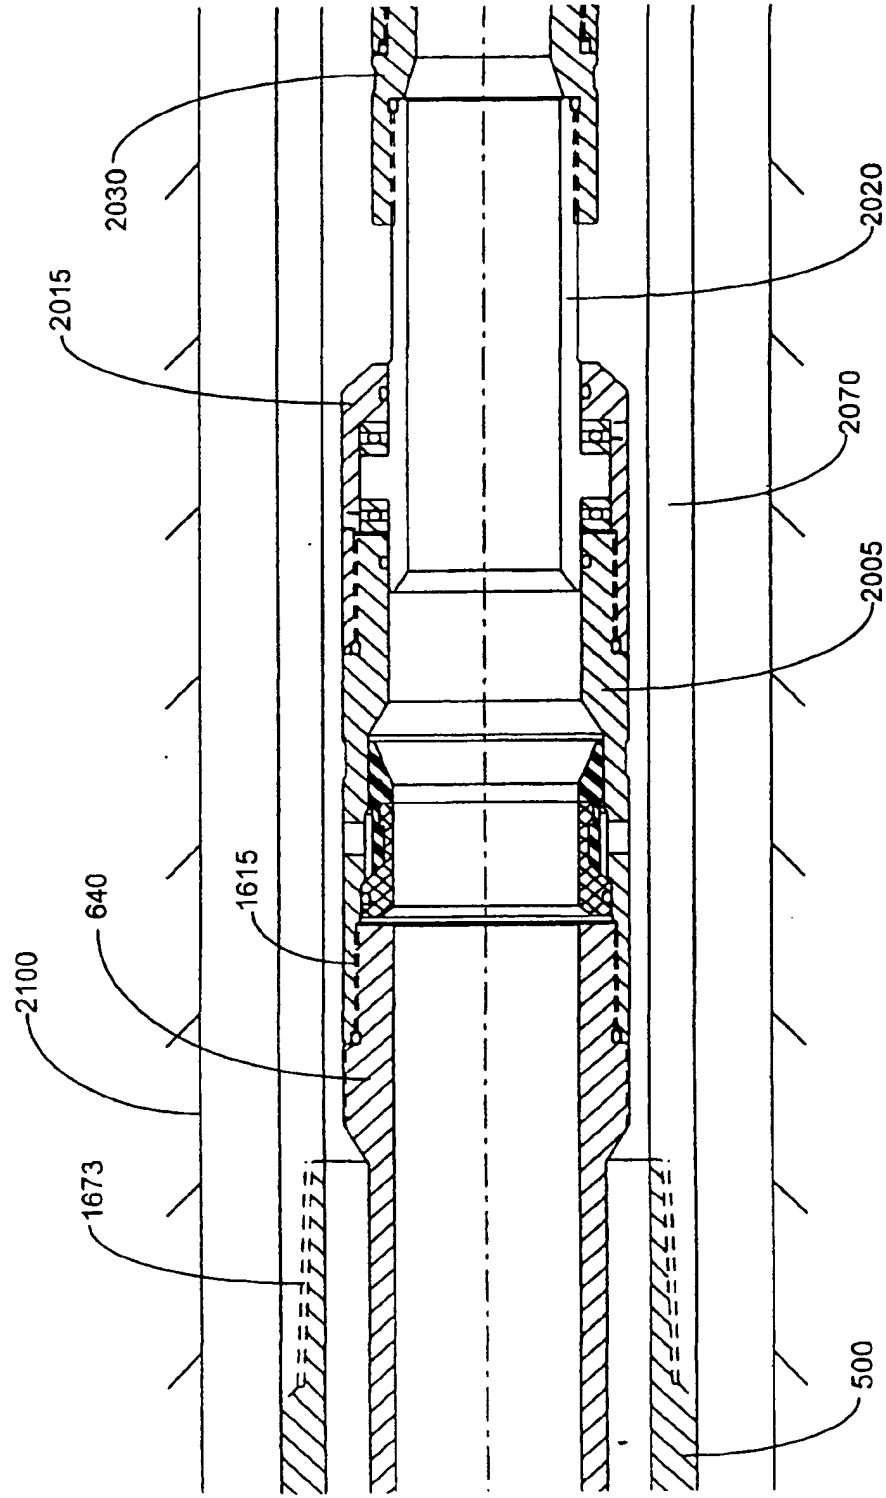


FIGURE 5B



4079

2070

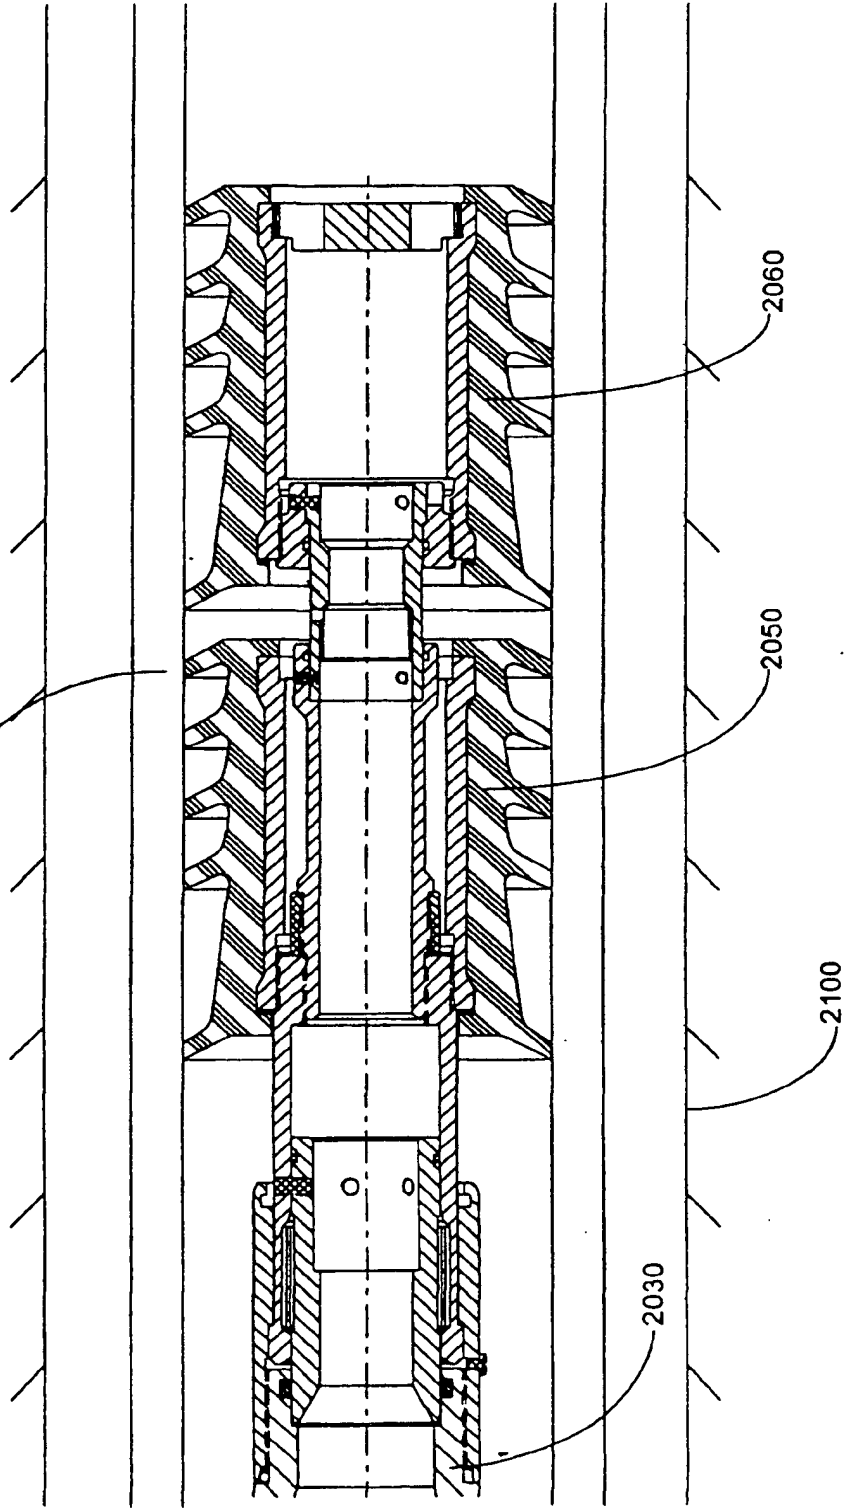


FIGURE 5C

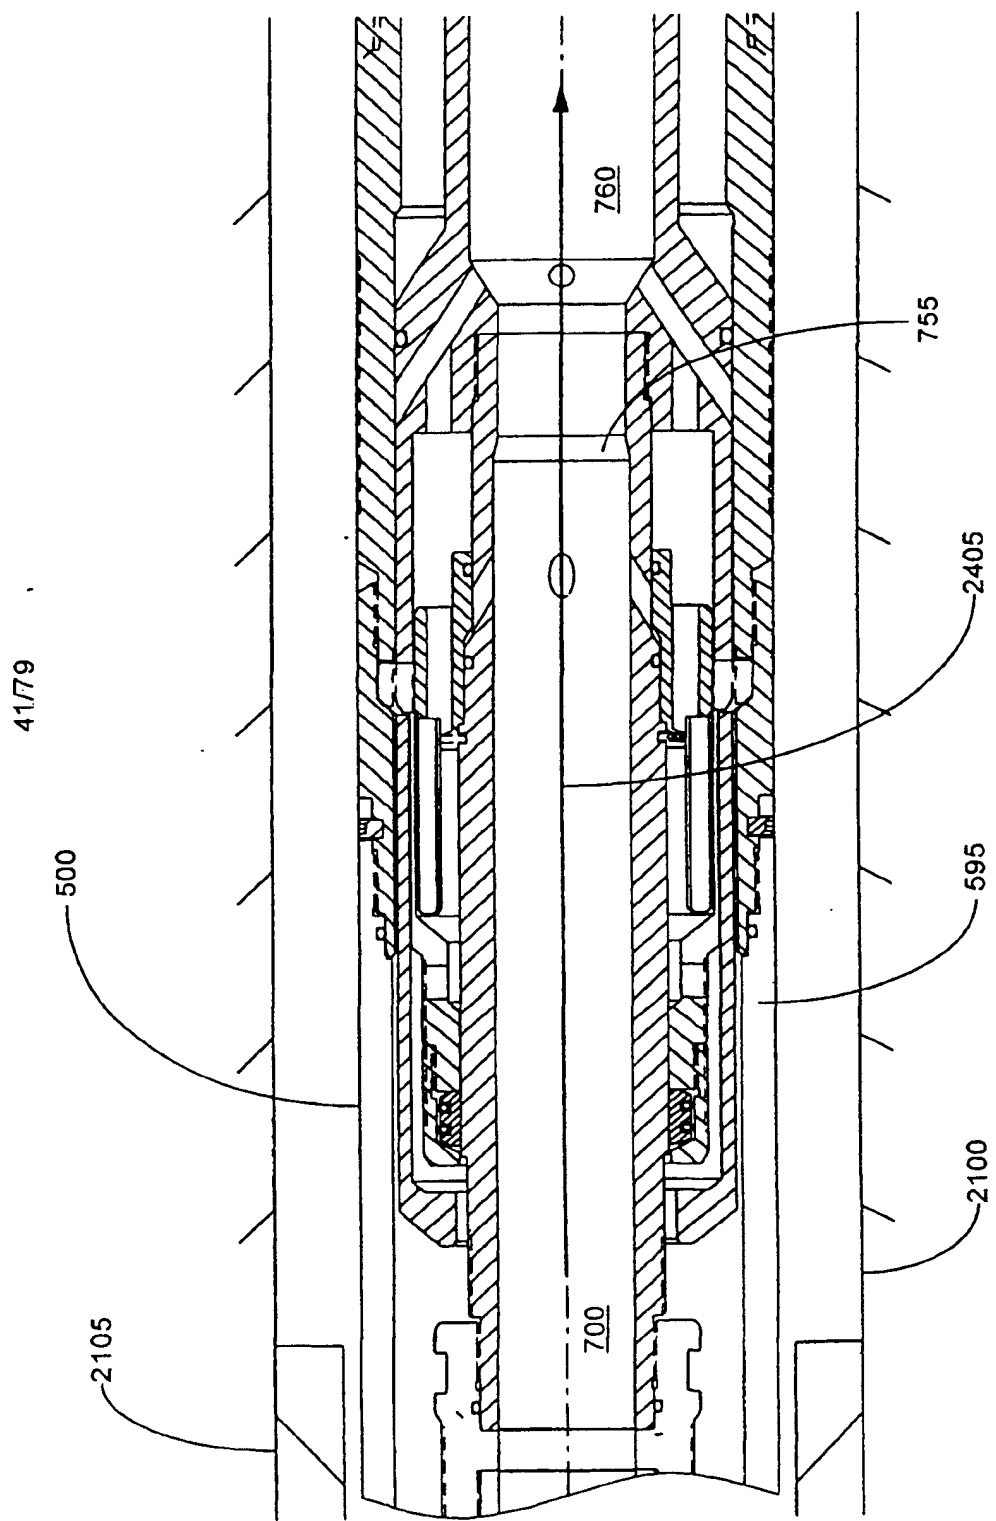


FIGURE 6A

()

42/79

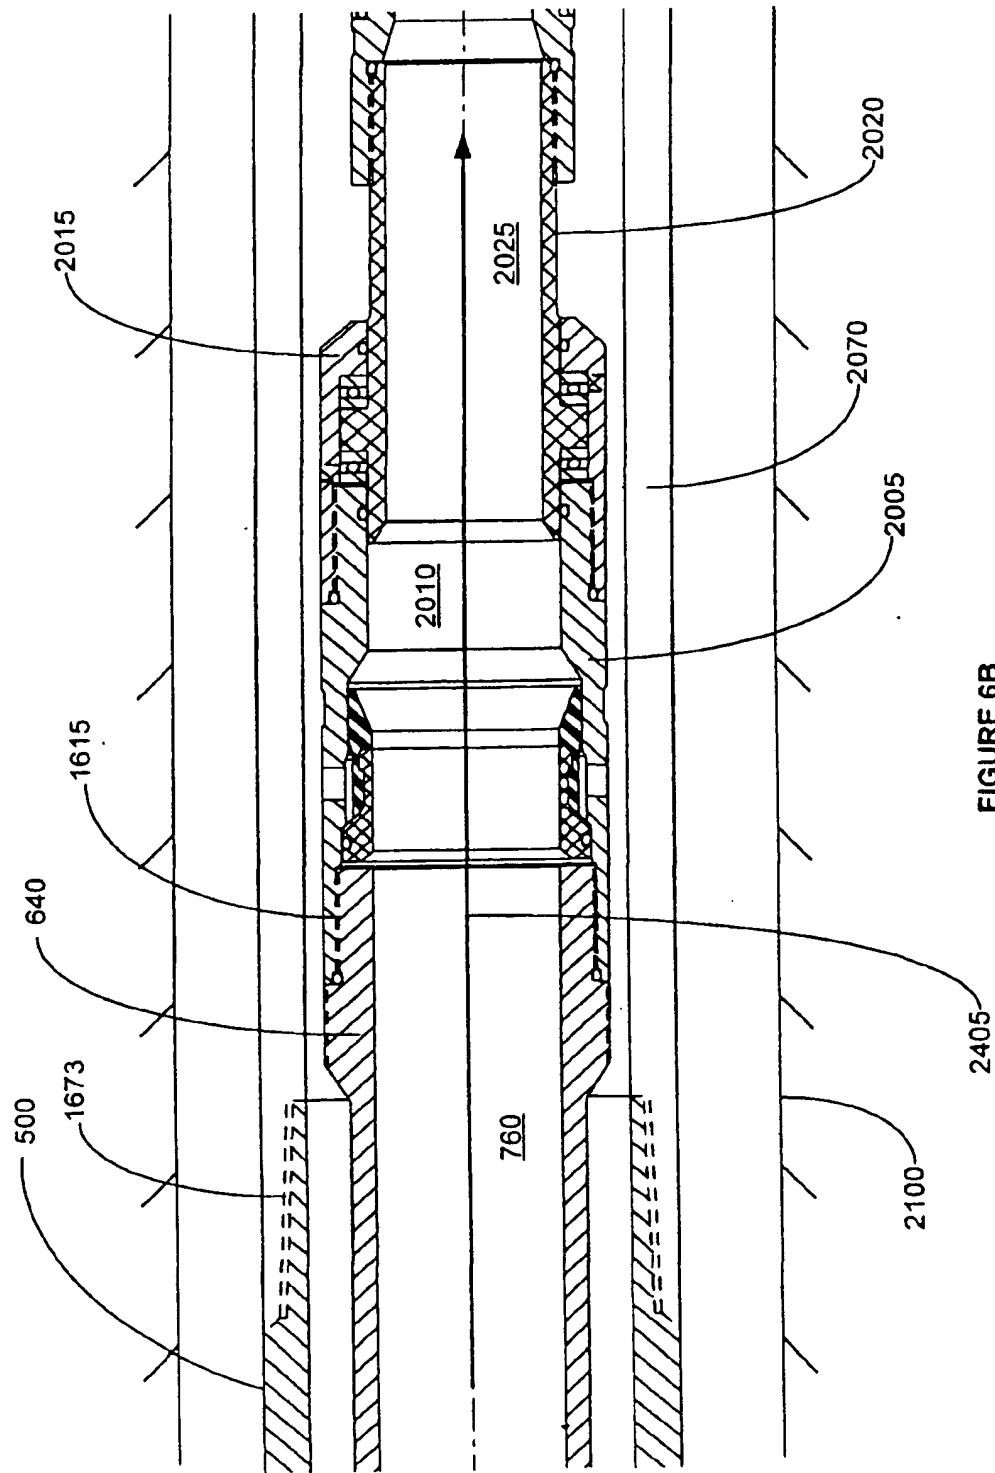


FIGURE 6B

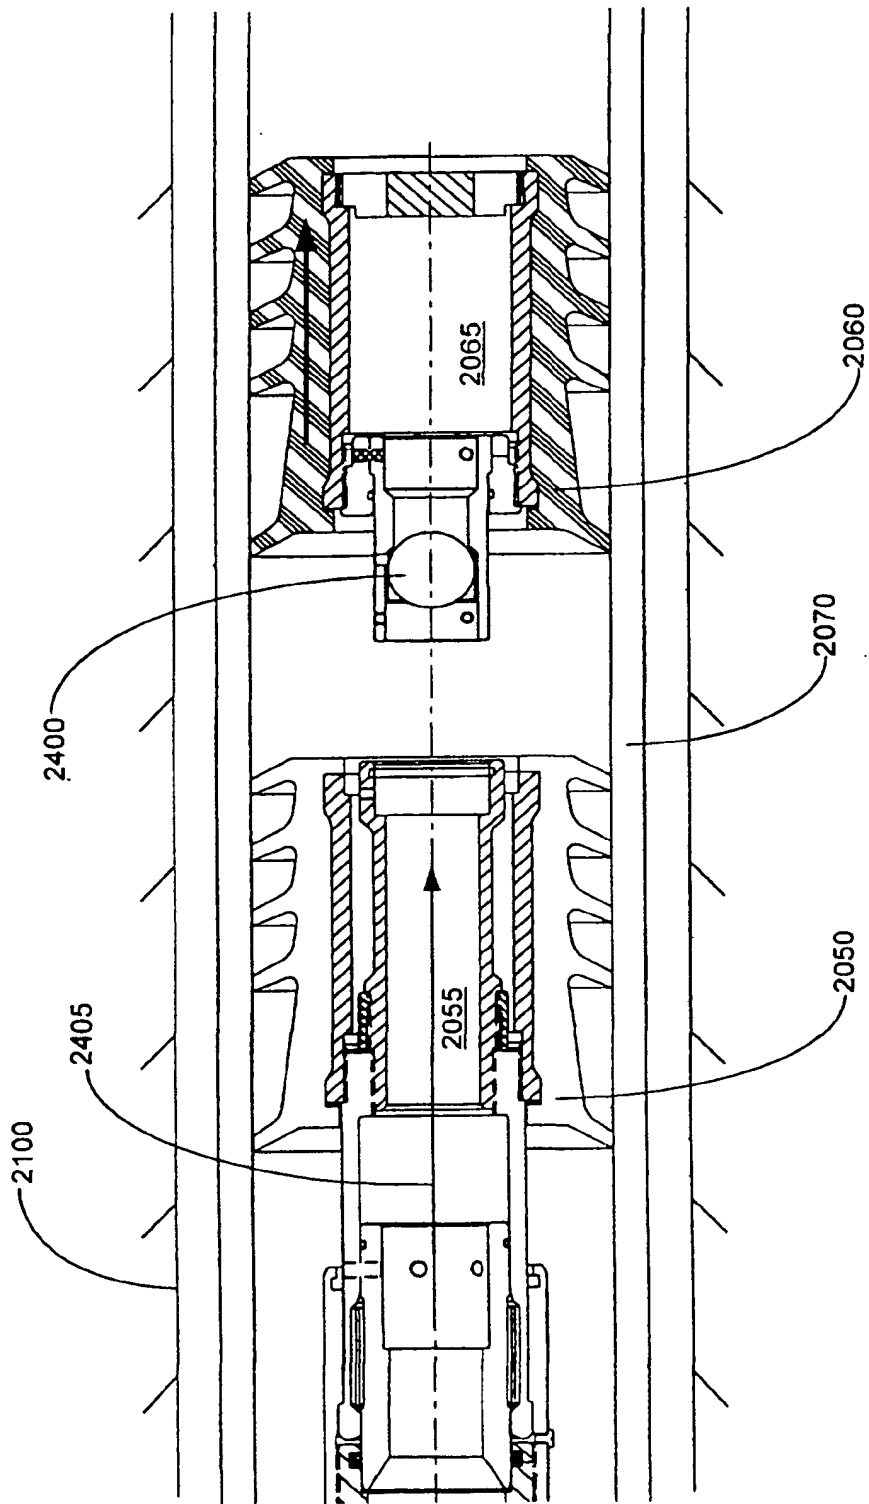


FIGURE 6C

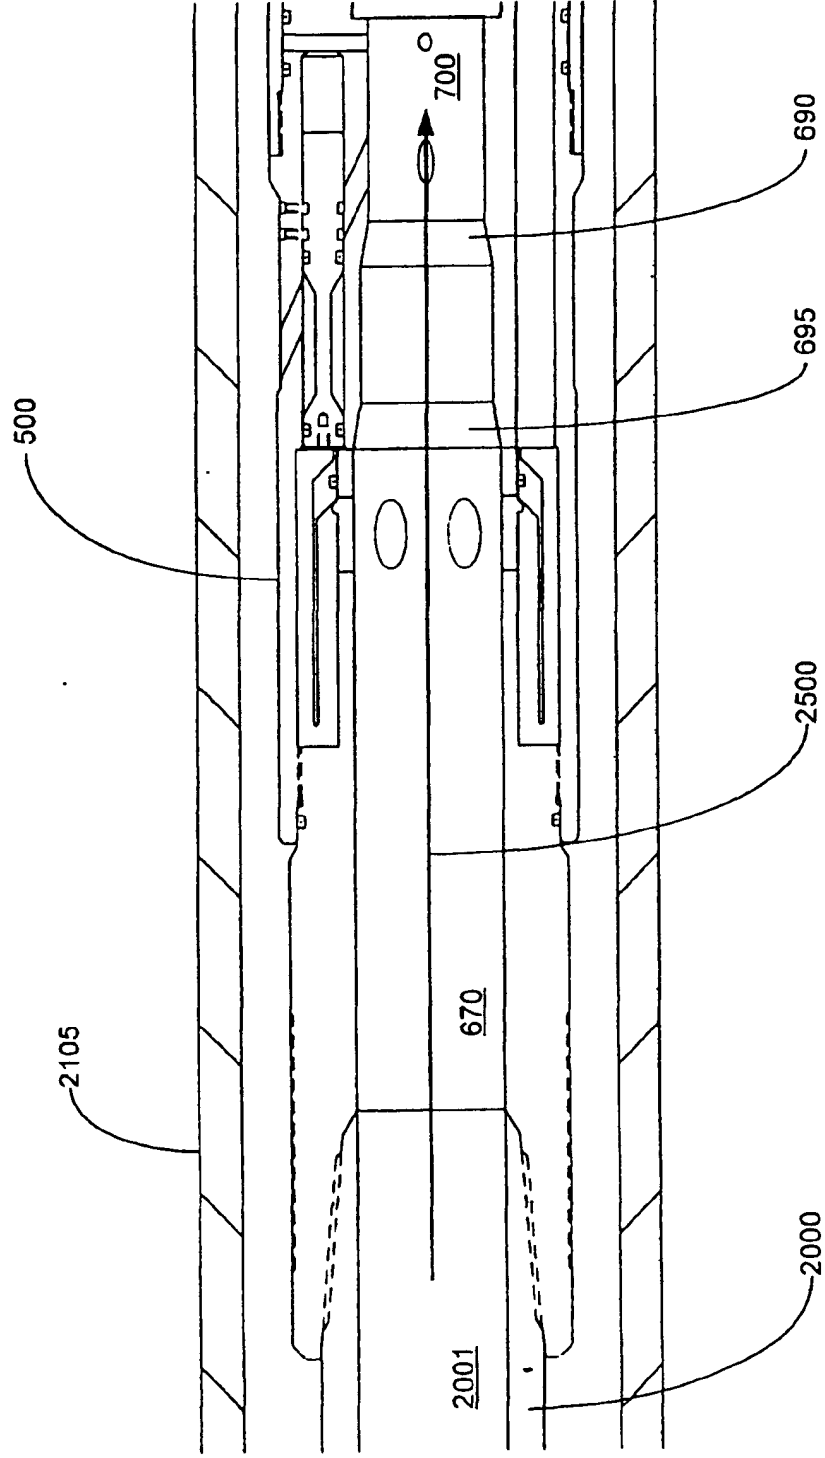


FIGURE 7A

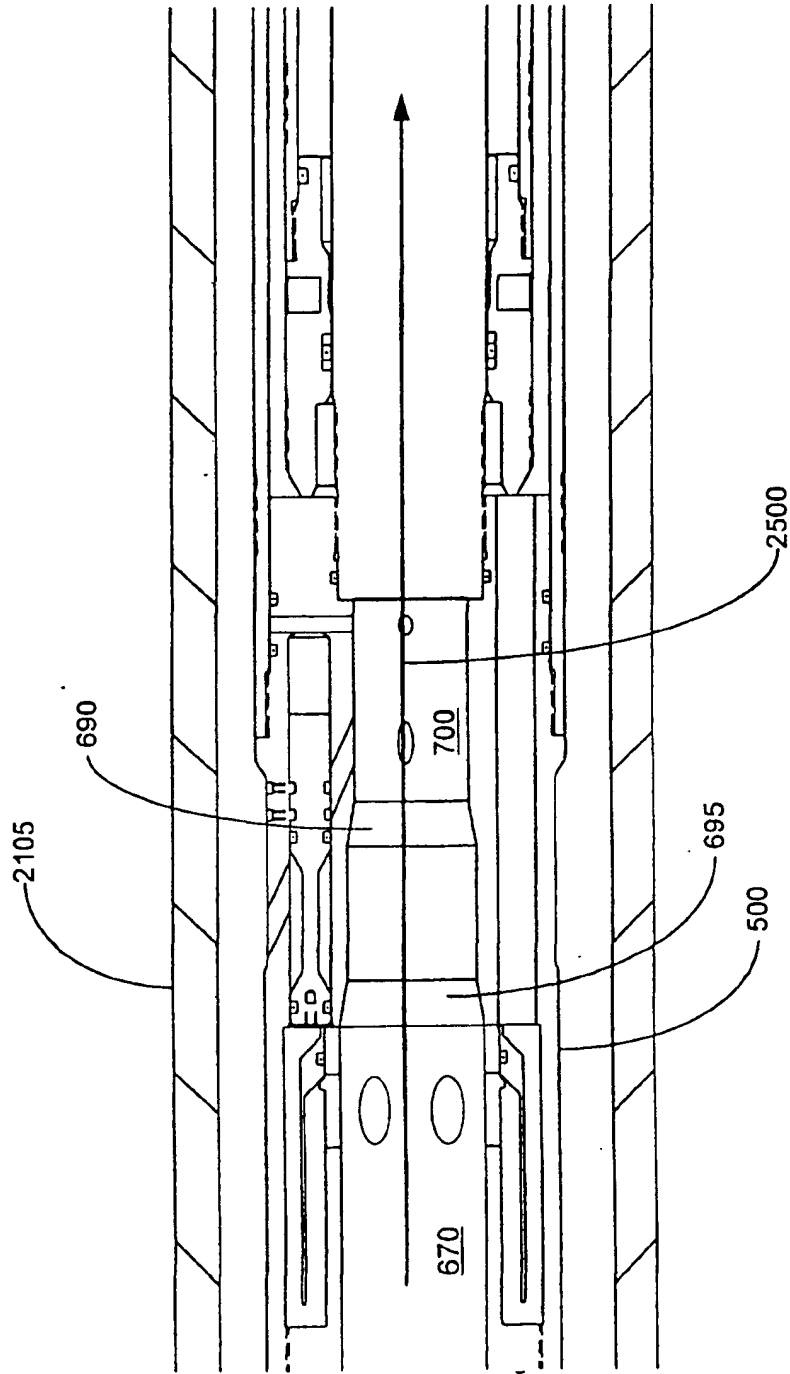


FIGURE 7B

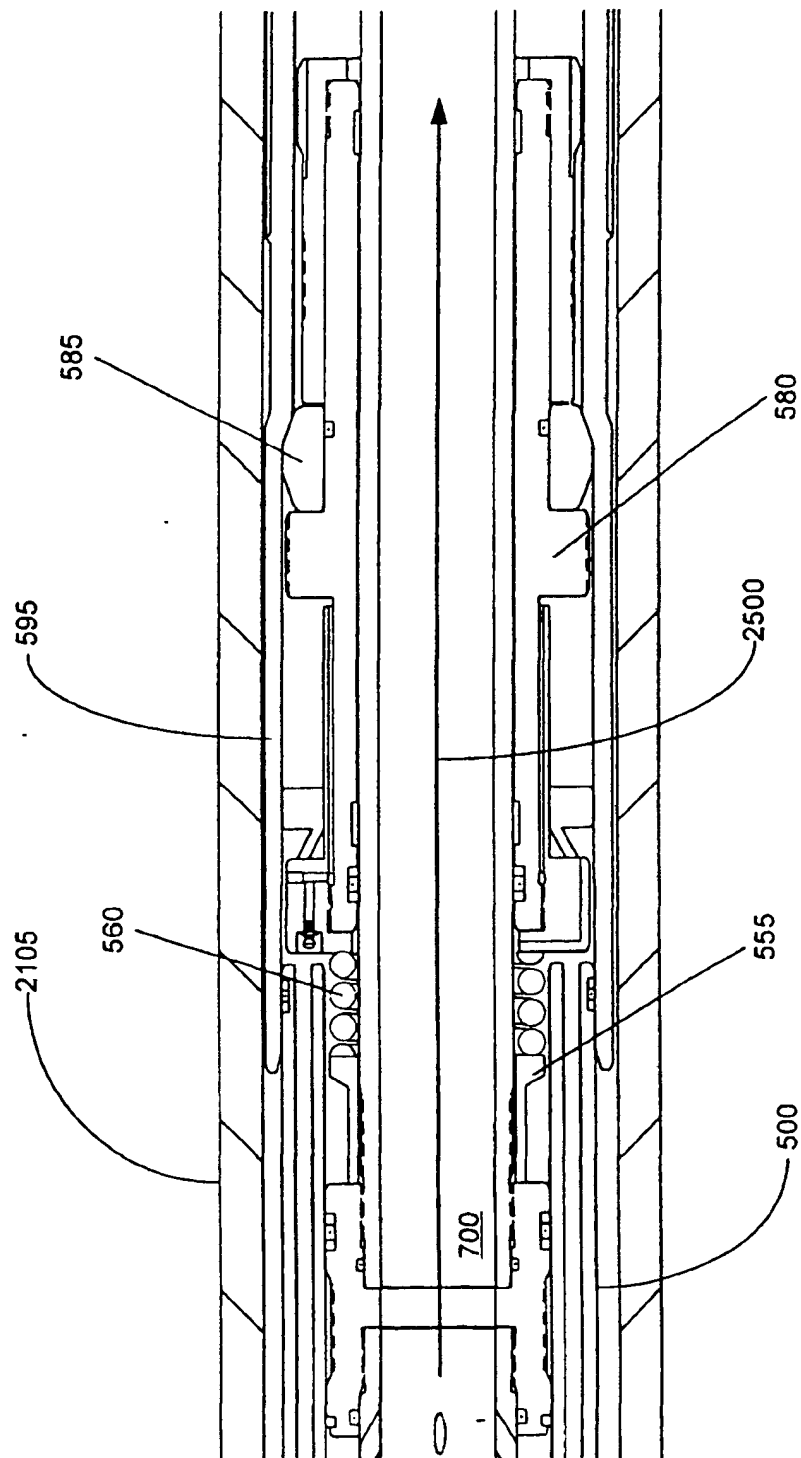


FIGURE 7C

()

4779

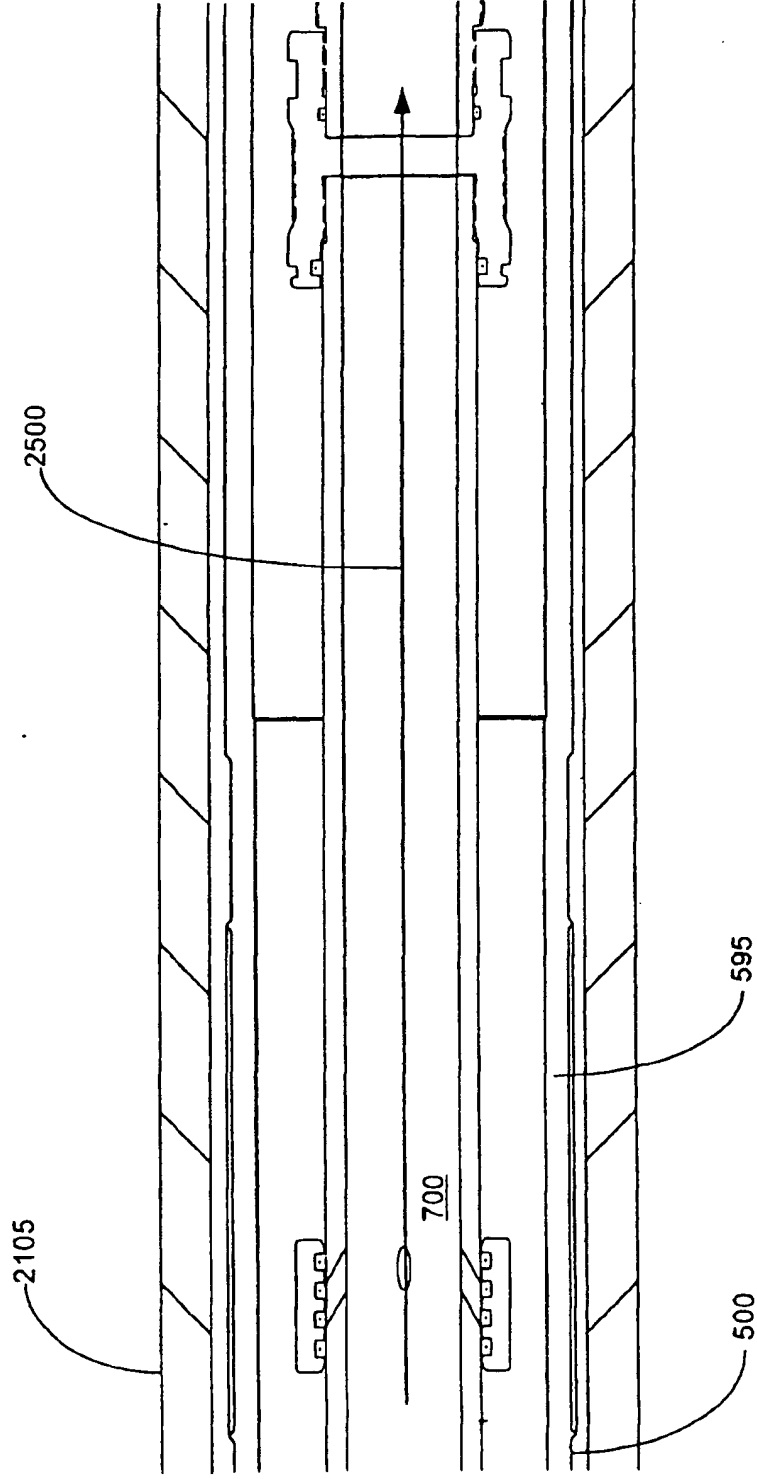


FIGURE 7D

48/79

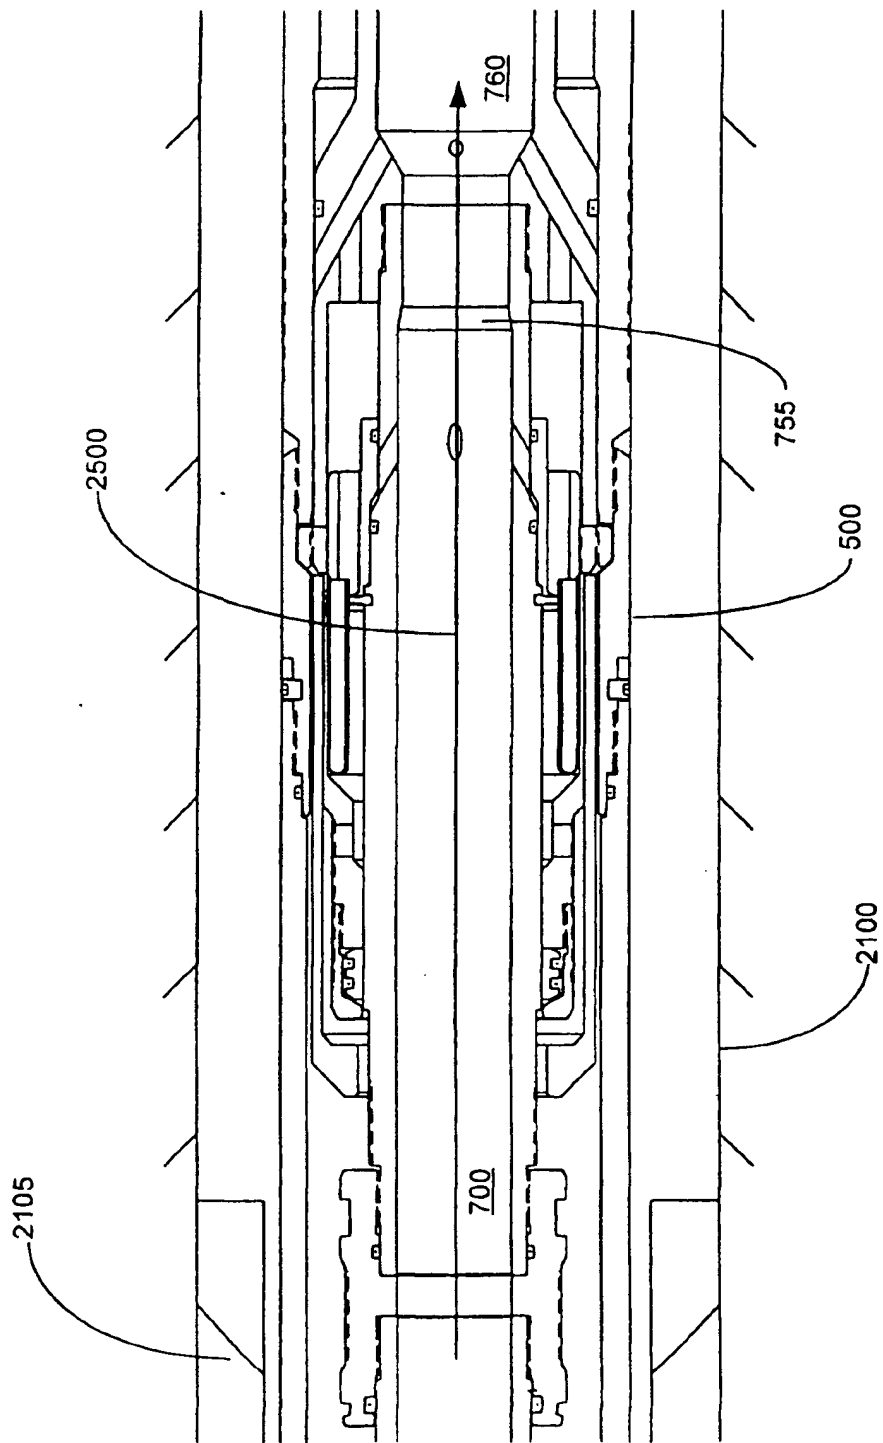


FIGURE 7E

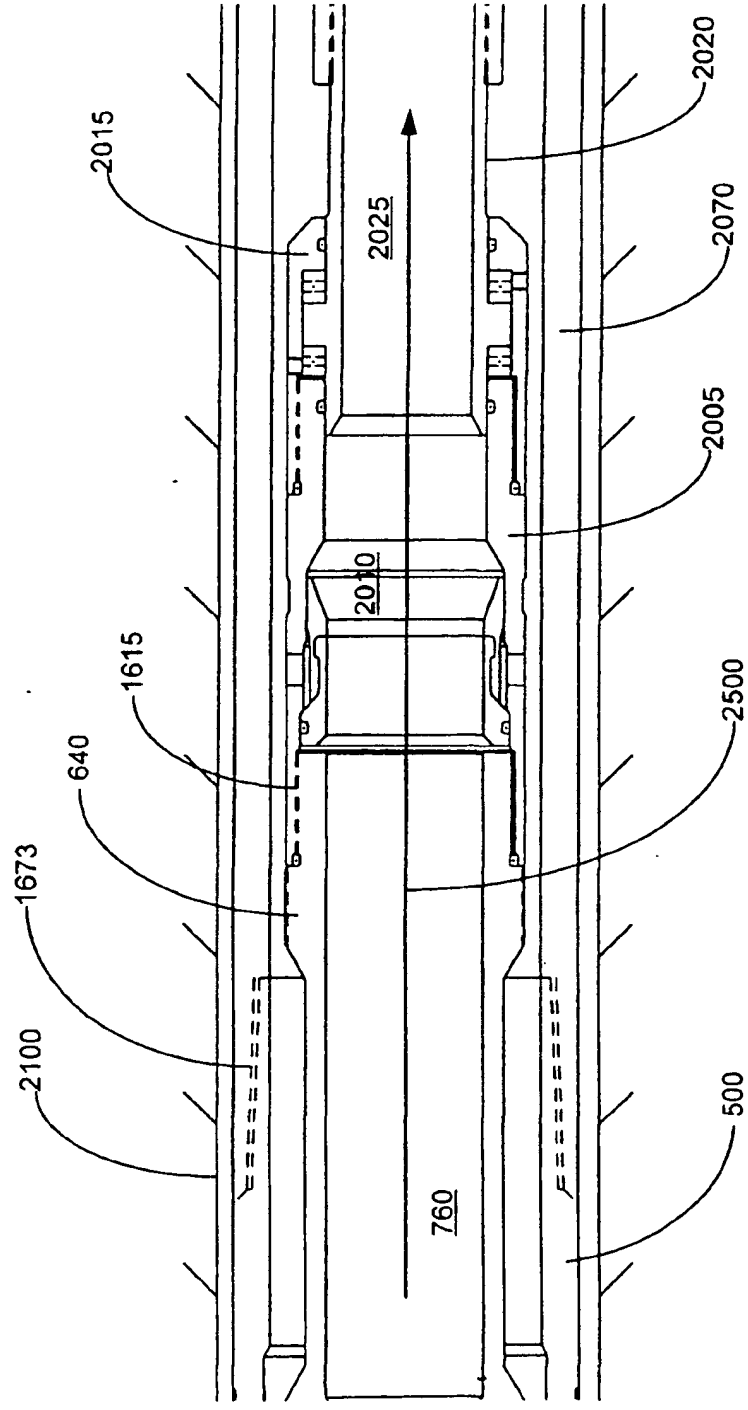


FIGURE 7F

50779

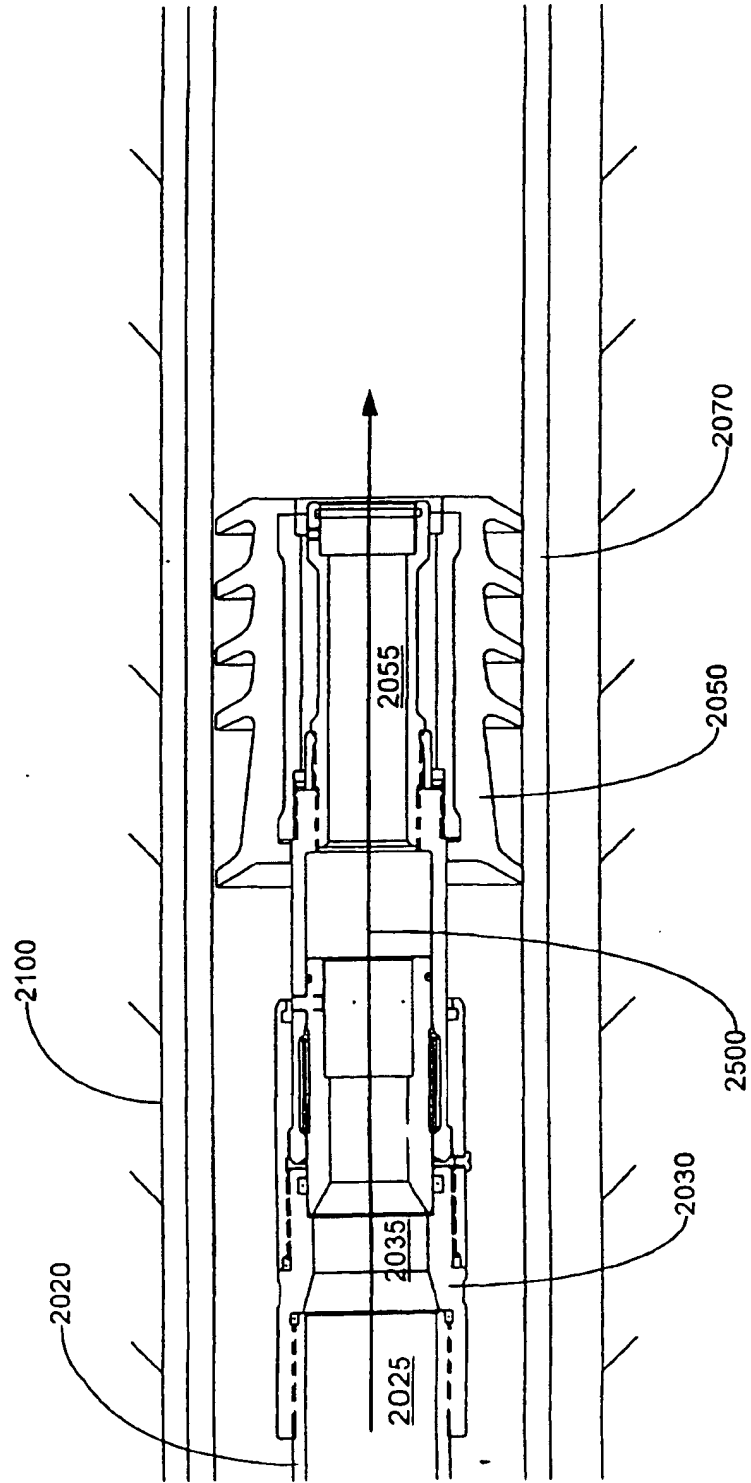


FIGURE 7G

5179

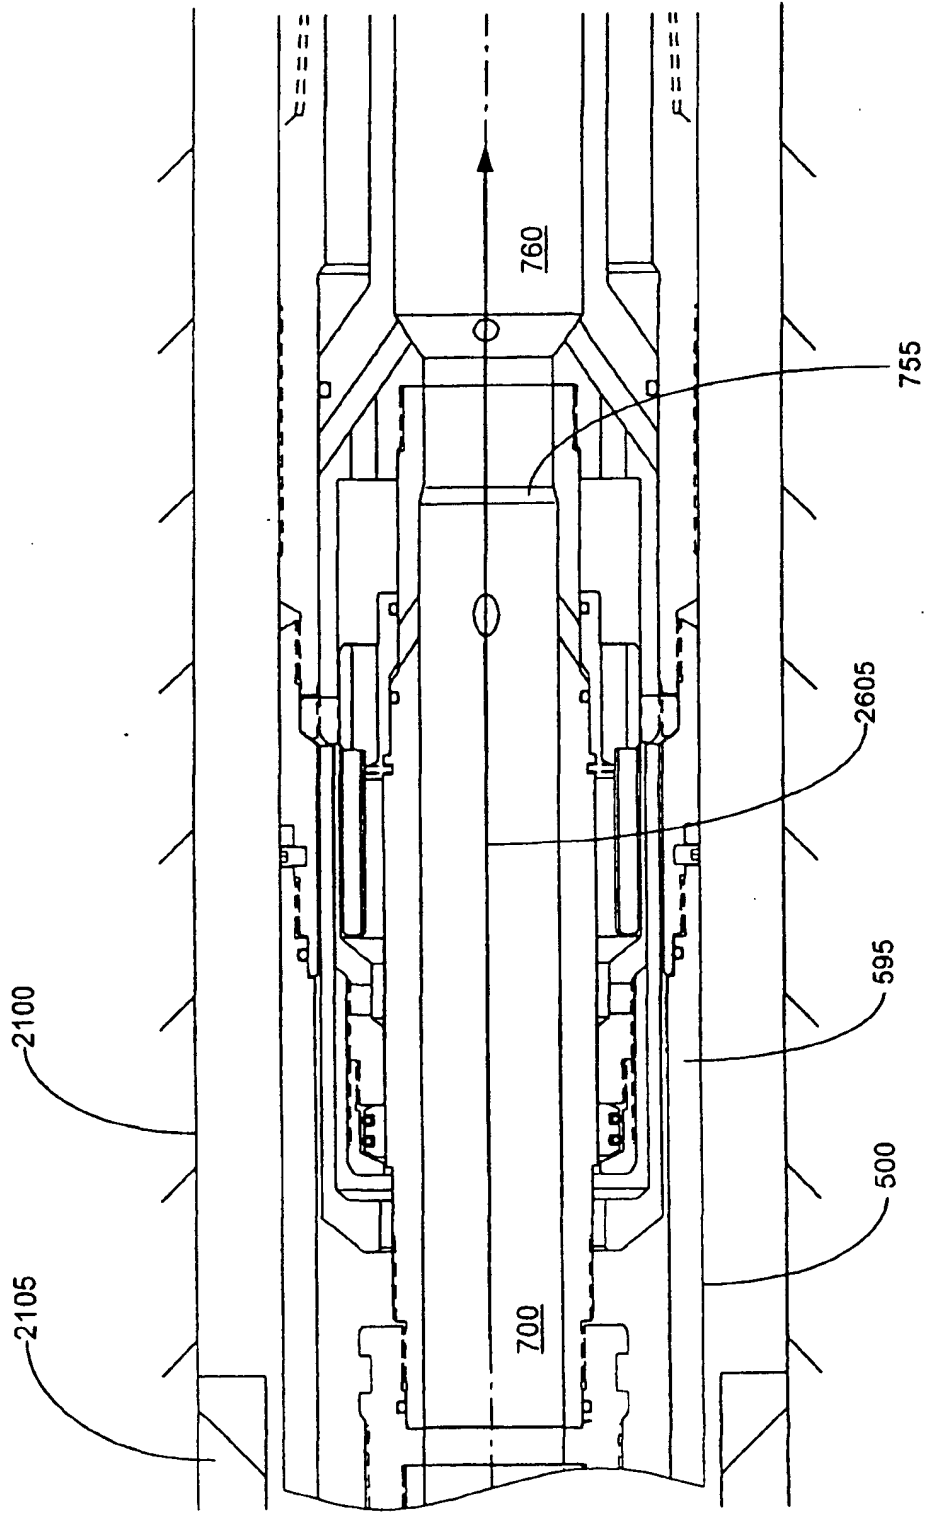


FIGURE 8A

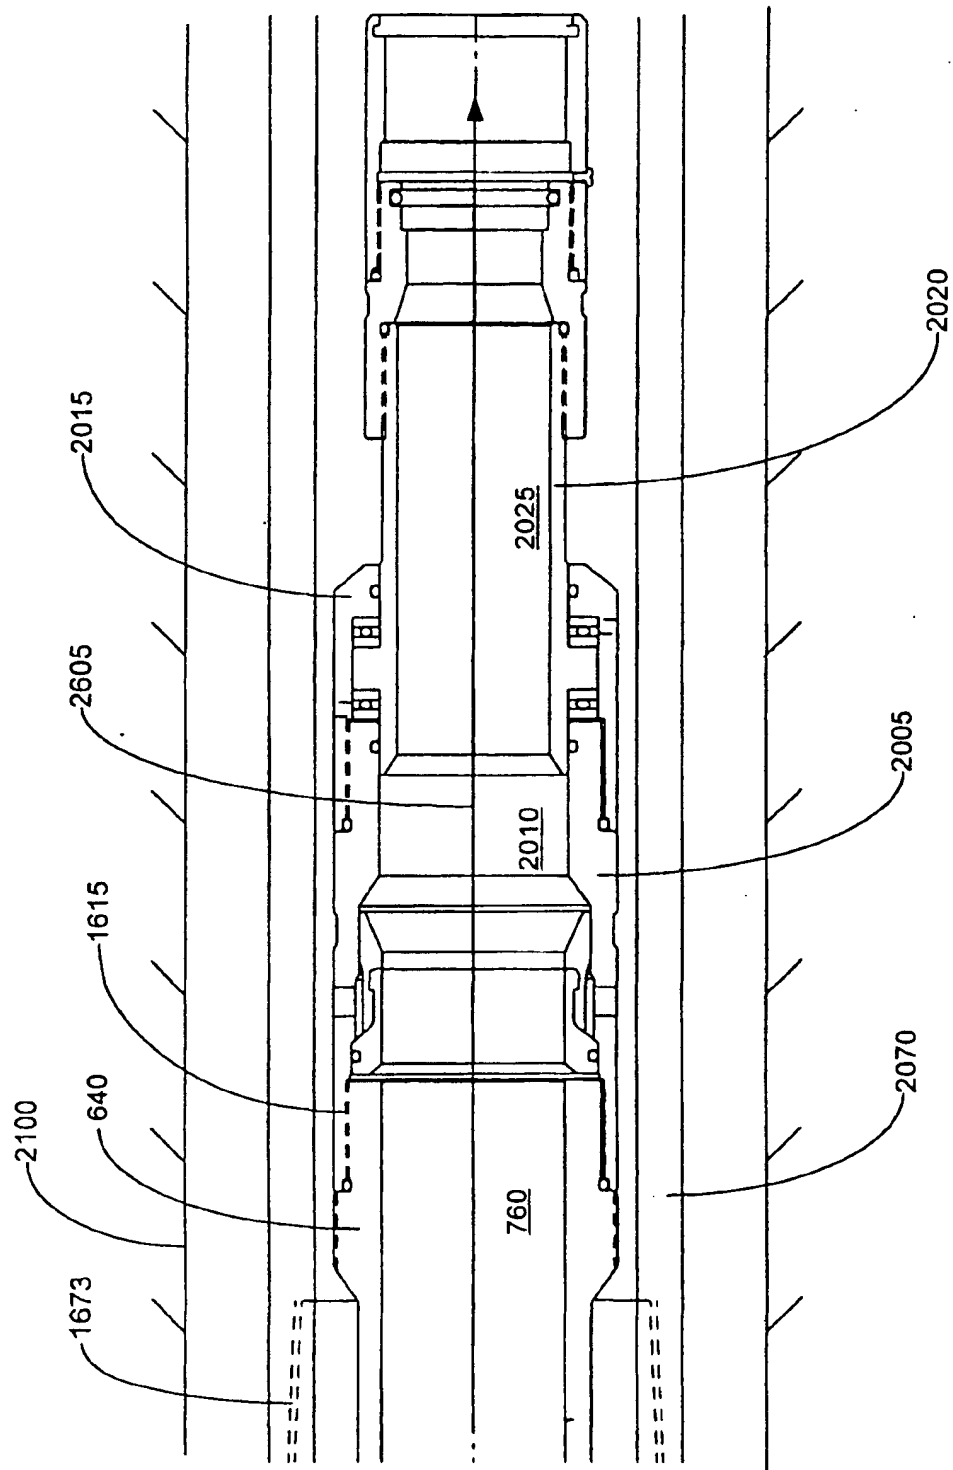


FIGURE 8B

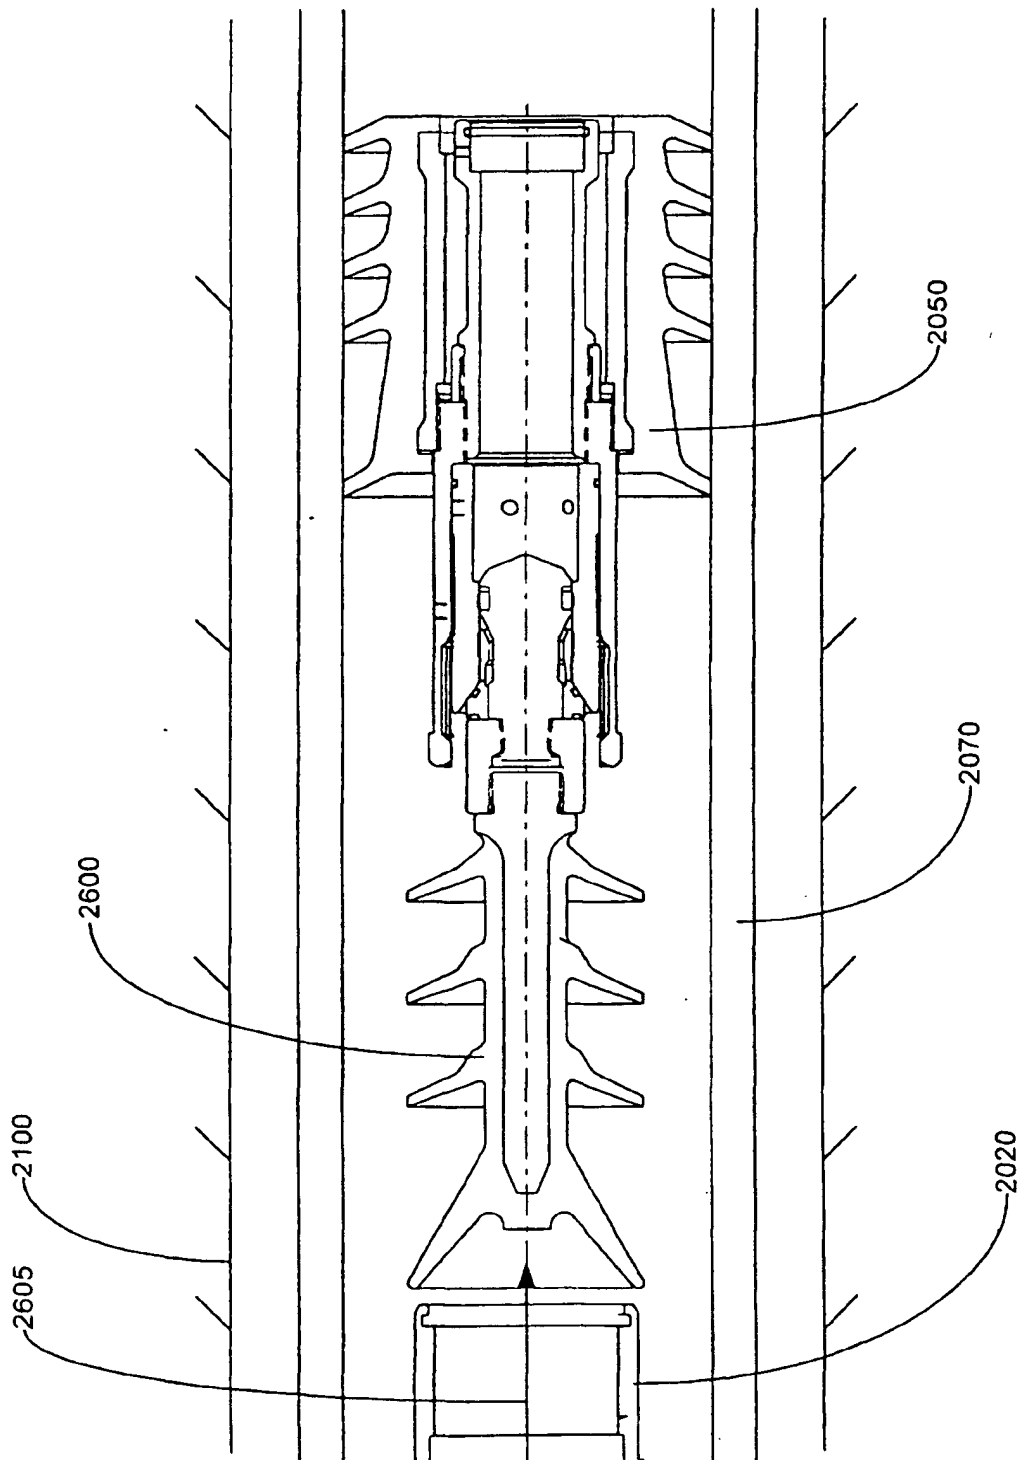


FIGURE 8C

54/79

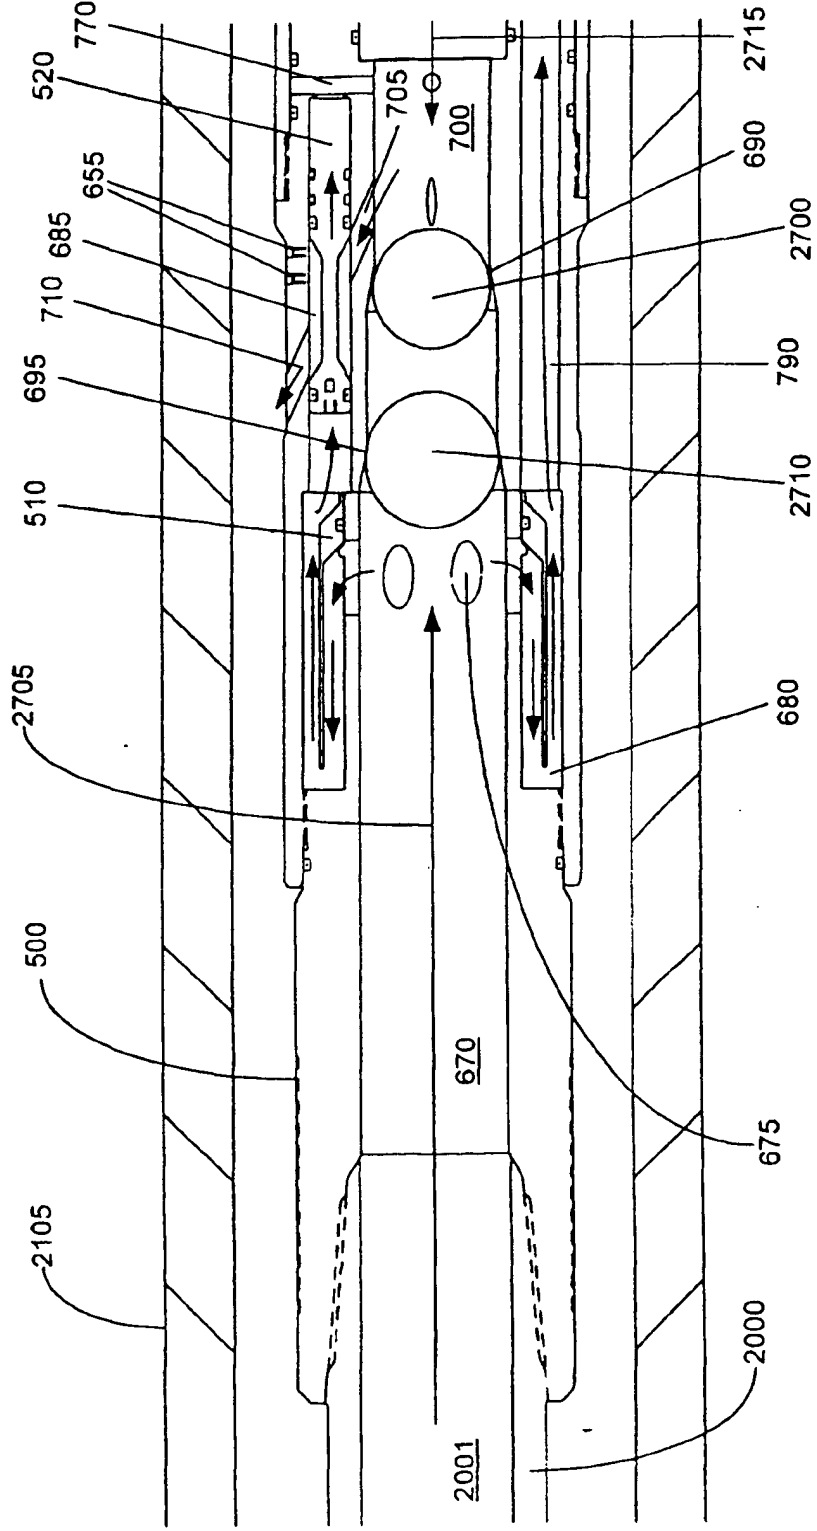


FIGURE 9A

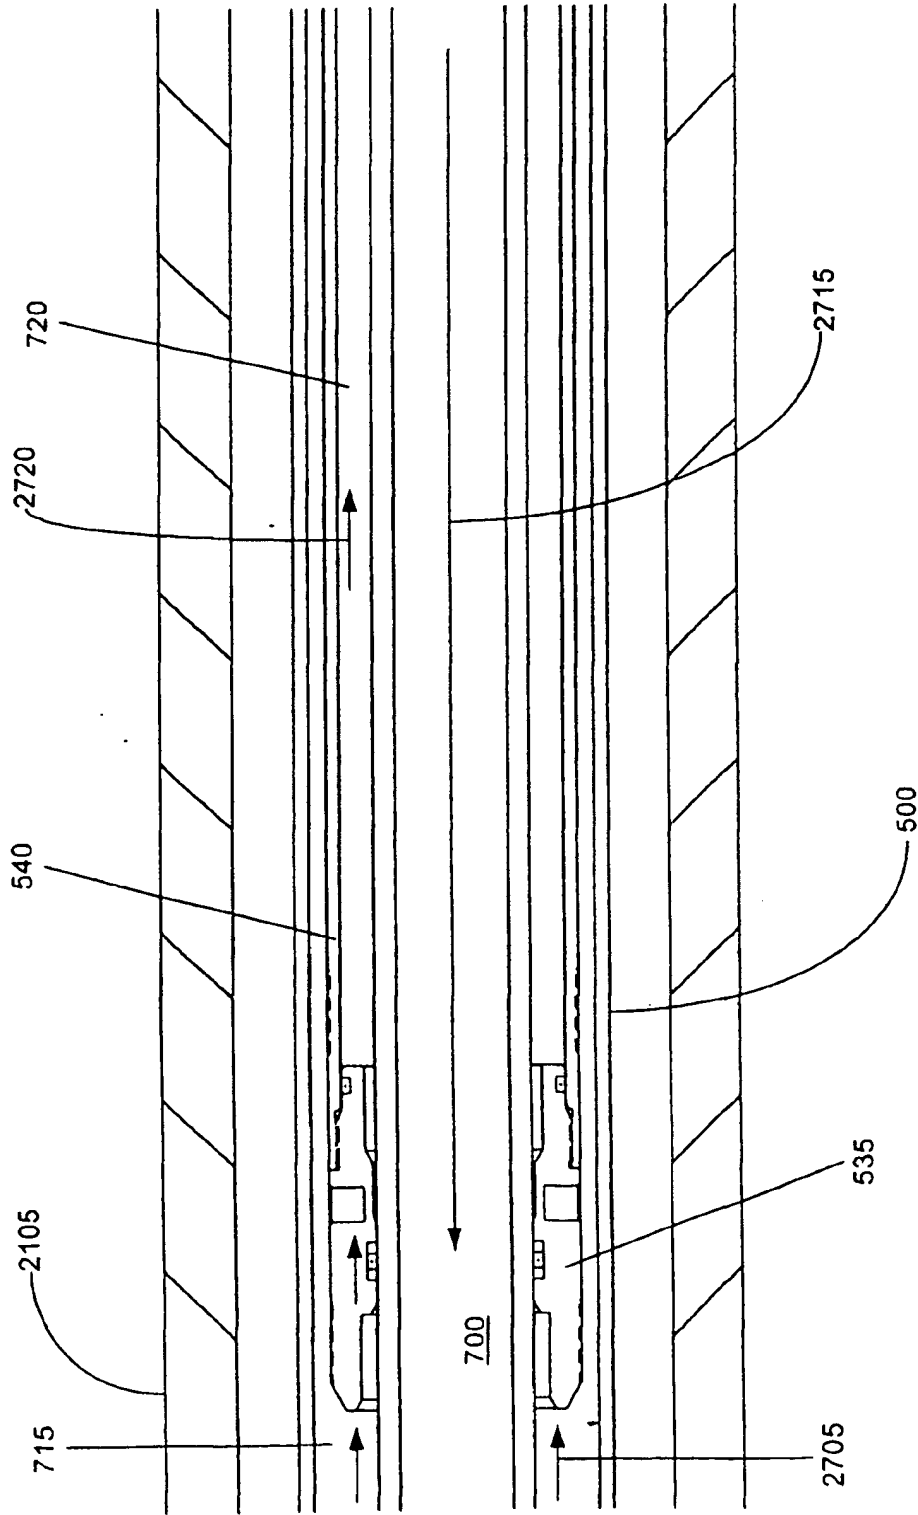


FIGURE 9B

56779

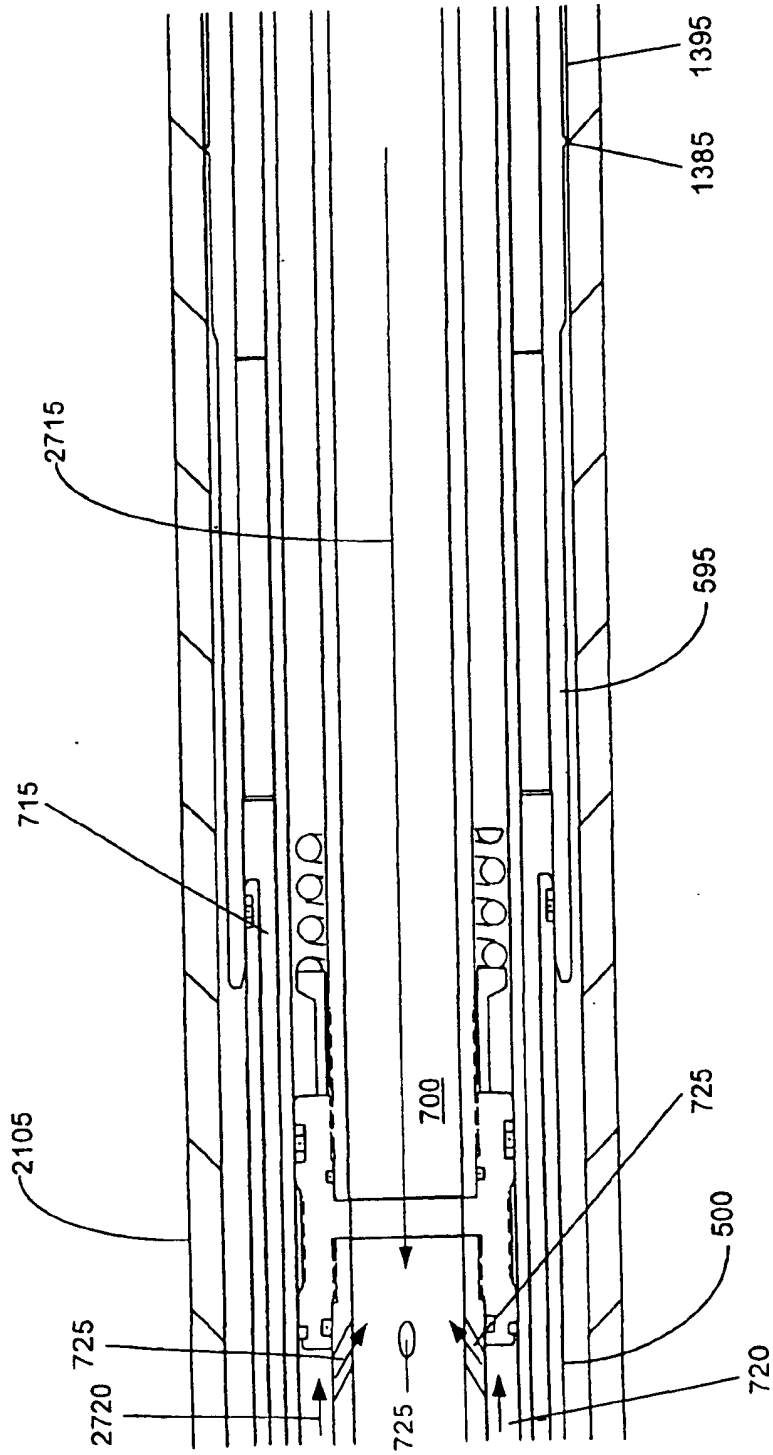


FIGURE 9C

5779

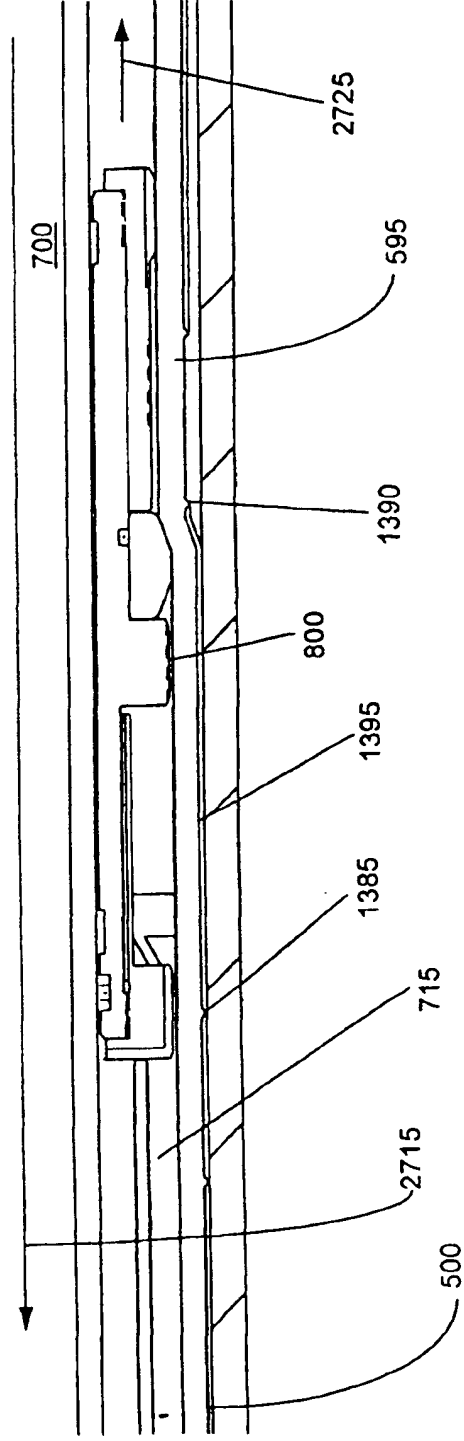
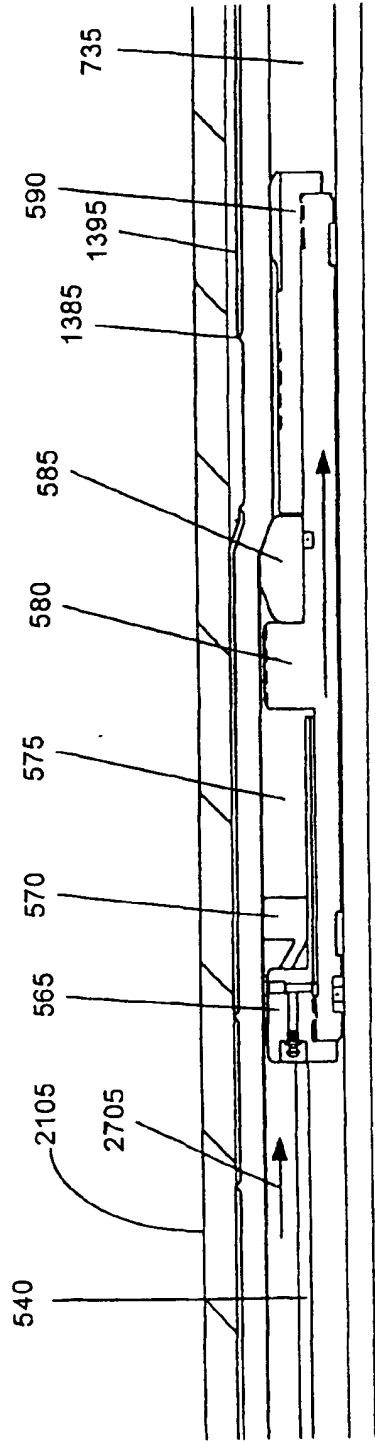


FIGURE 9D

58/79

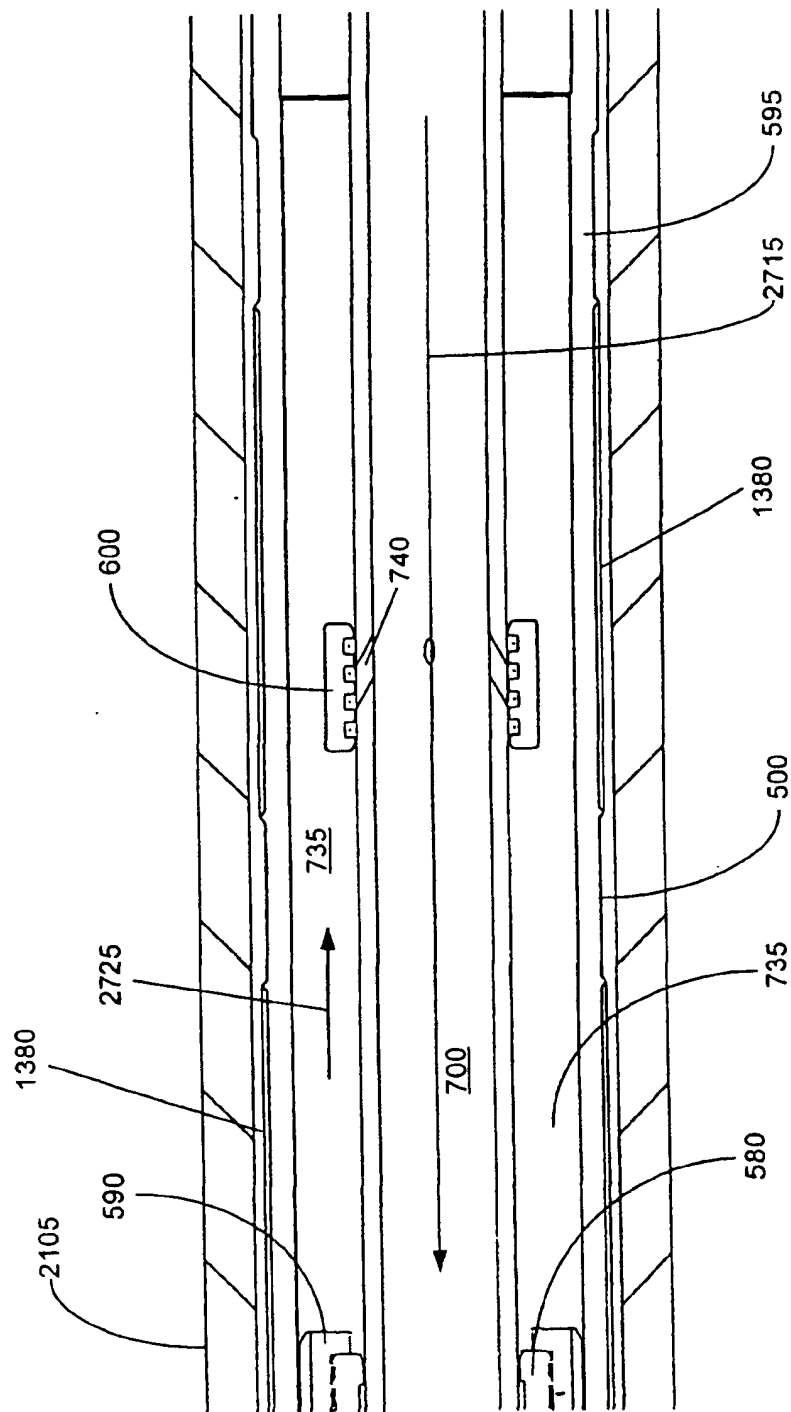


FIGURE 9E

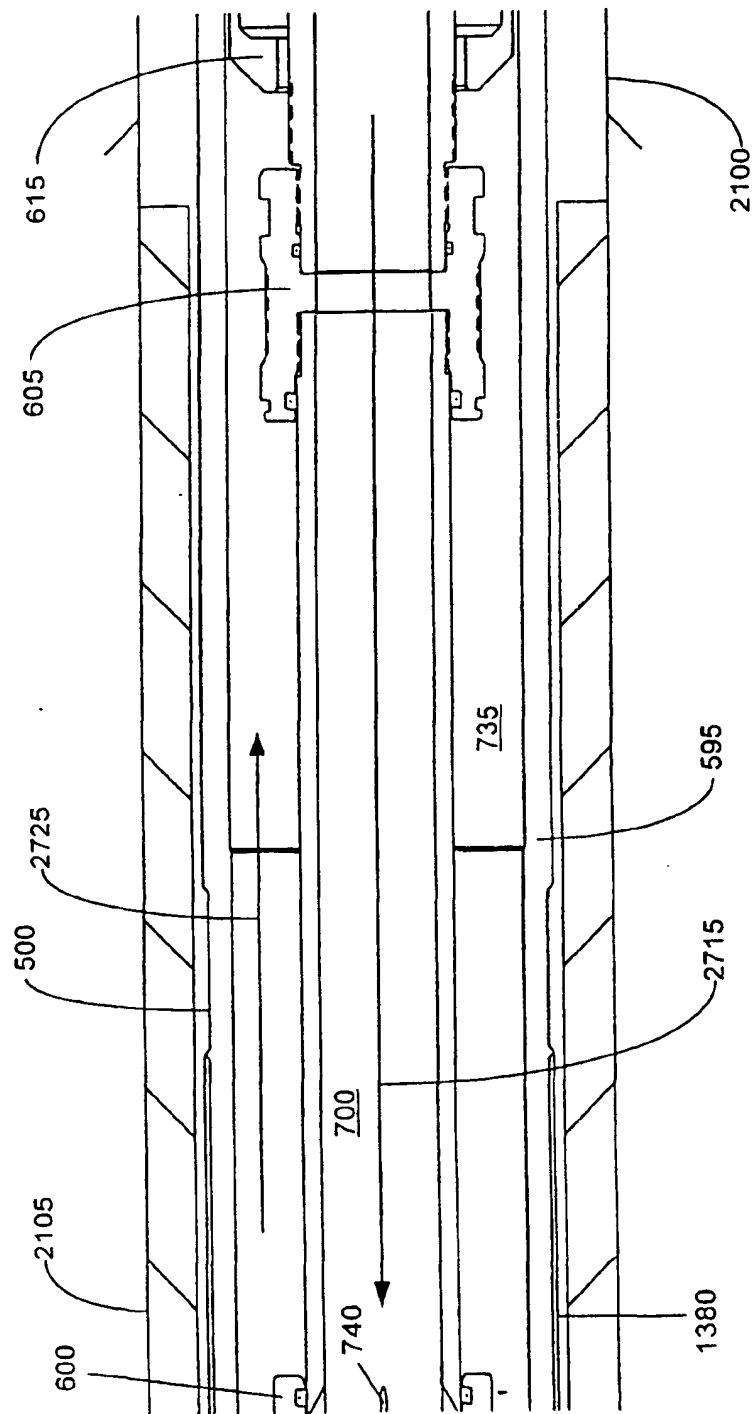


FIGURE 9F

60779

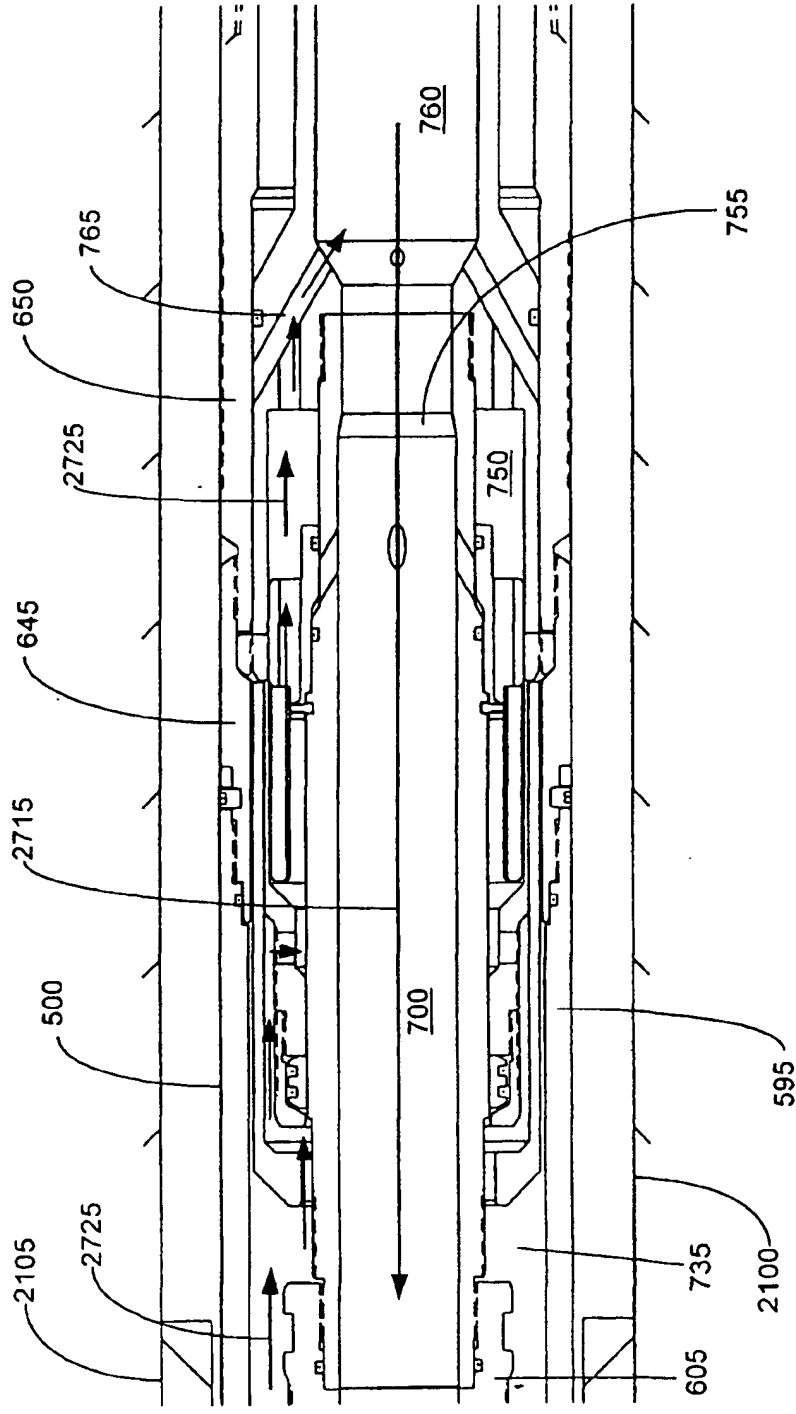


FIGURE 9G

6179

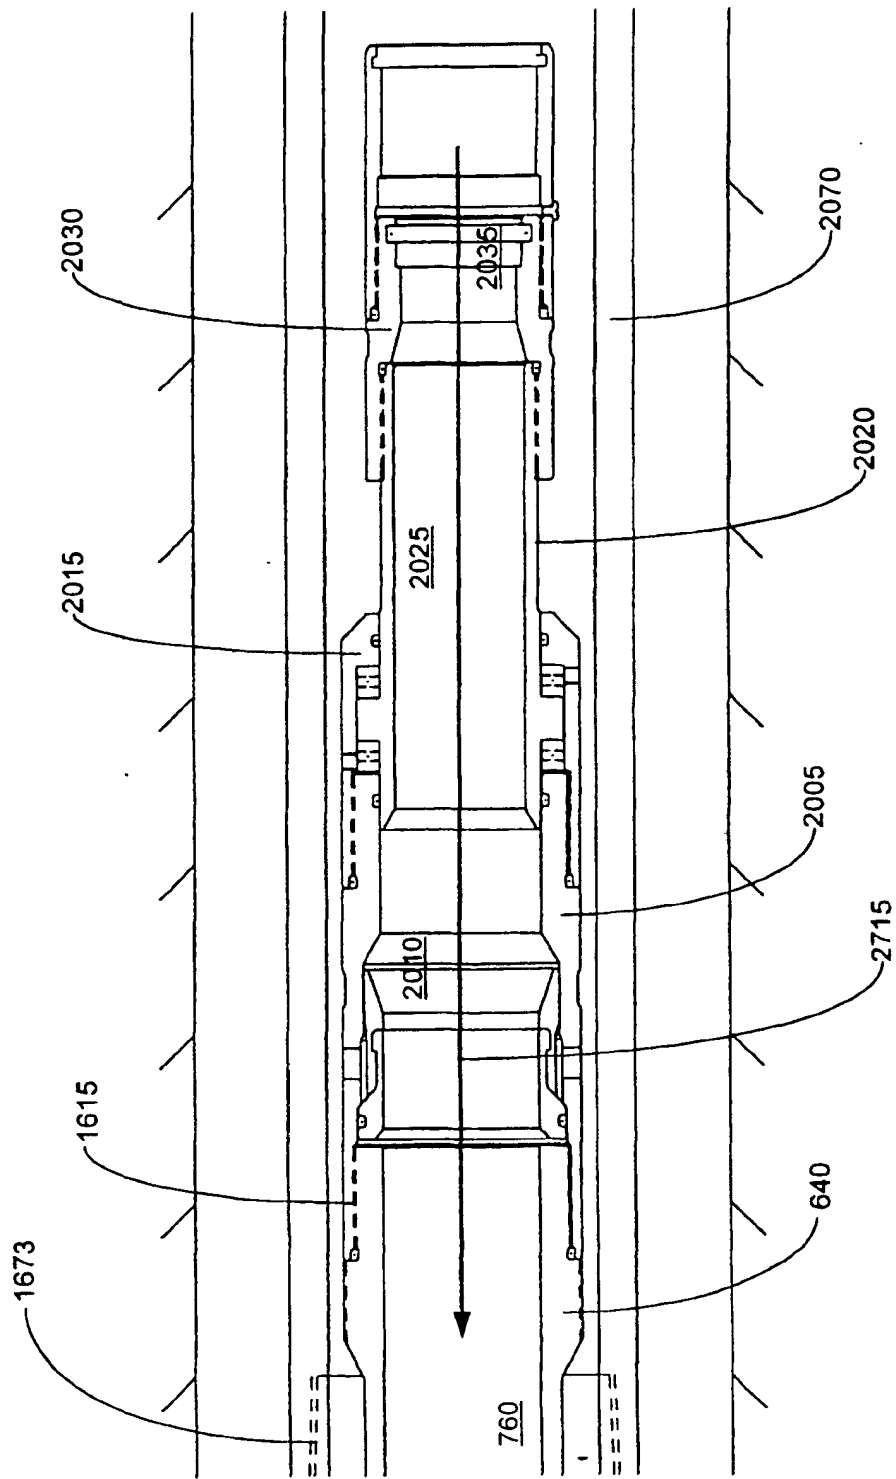


FIGURE 9H

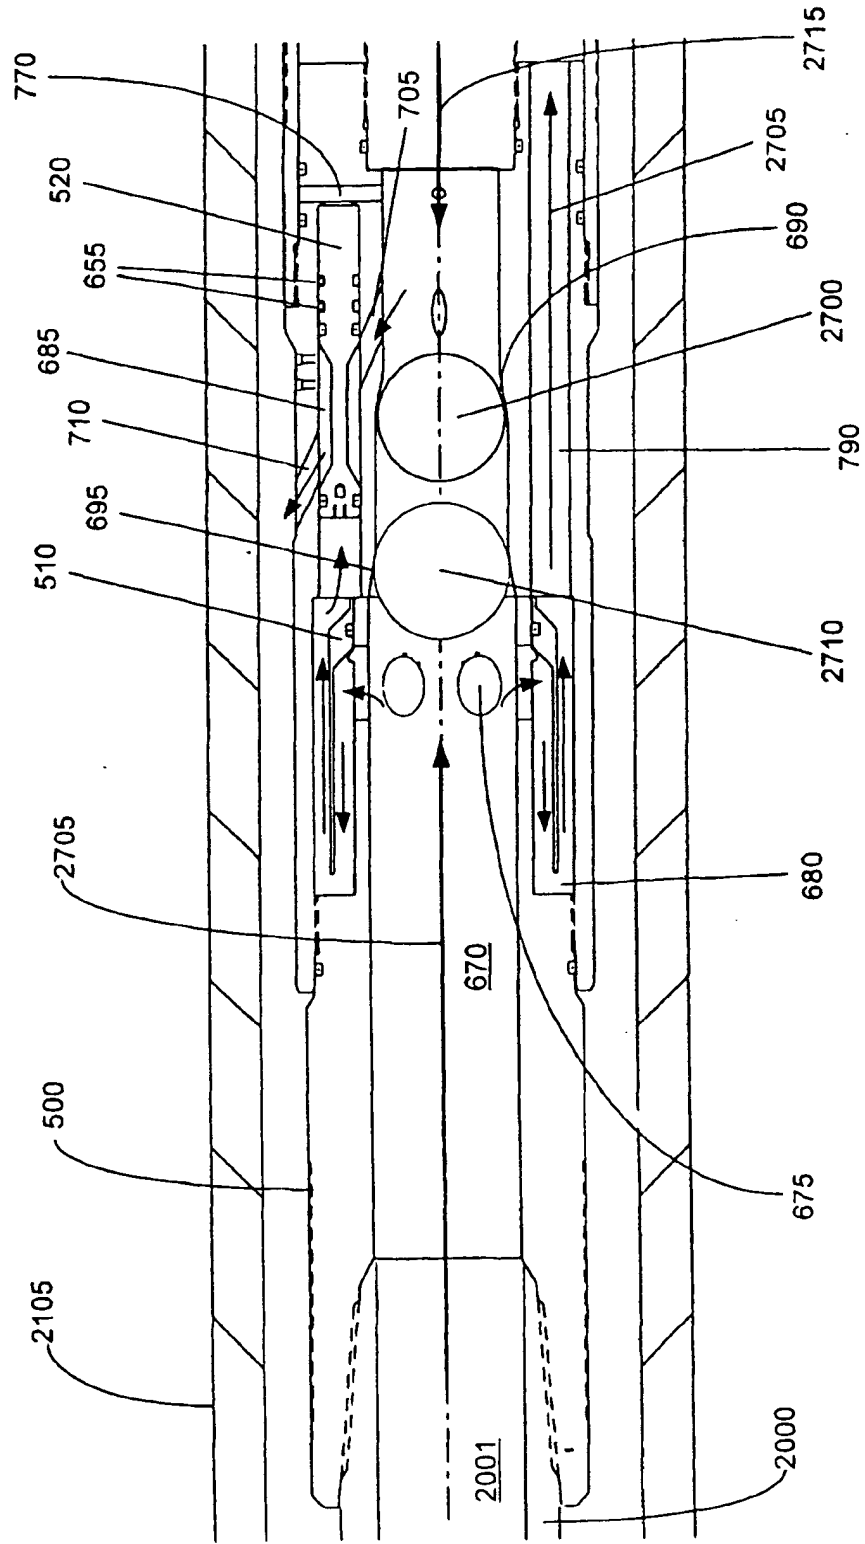


FIGURE 10A

63/79

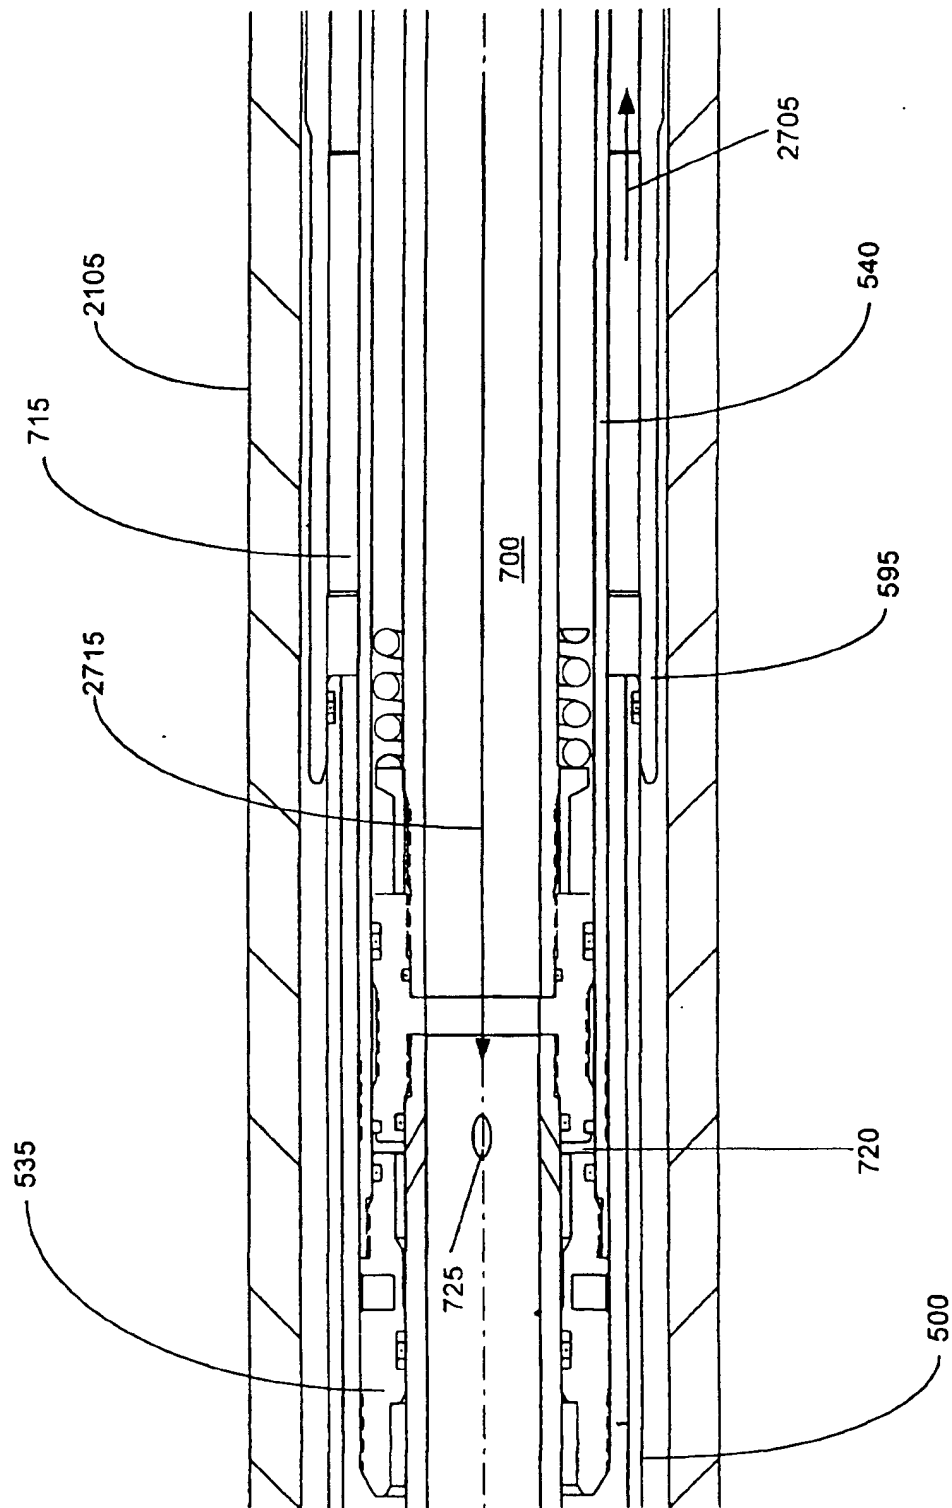


FIGURE 10B



64/79

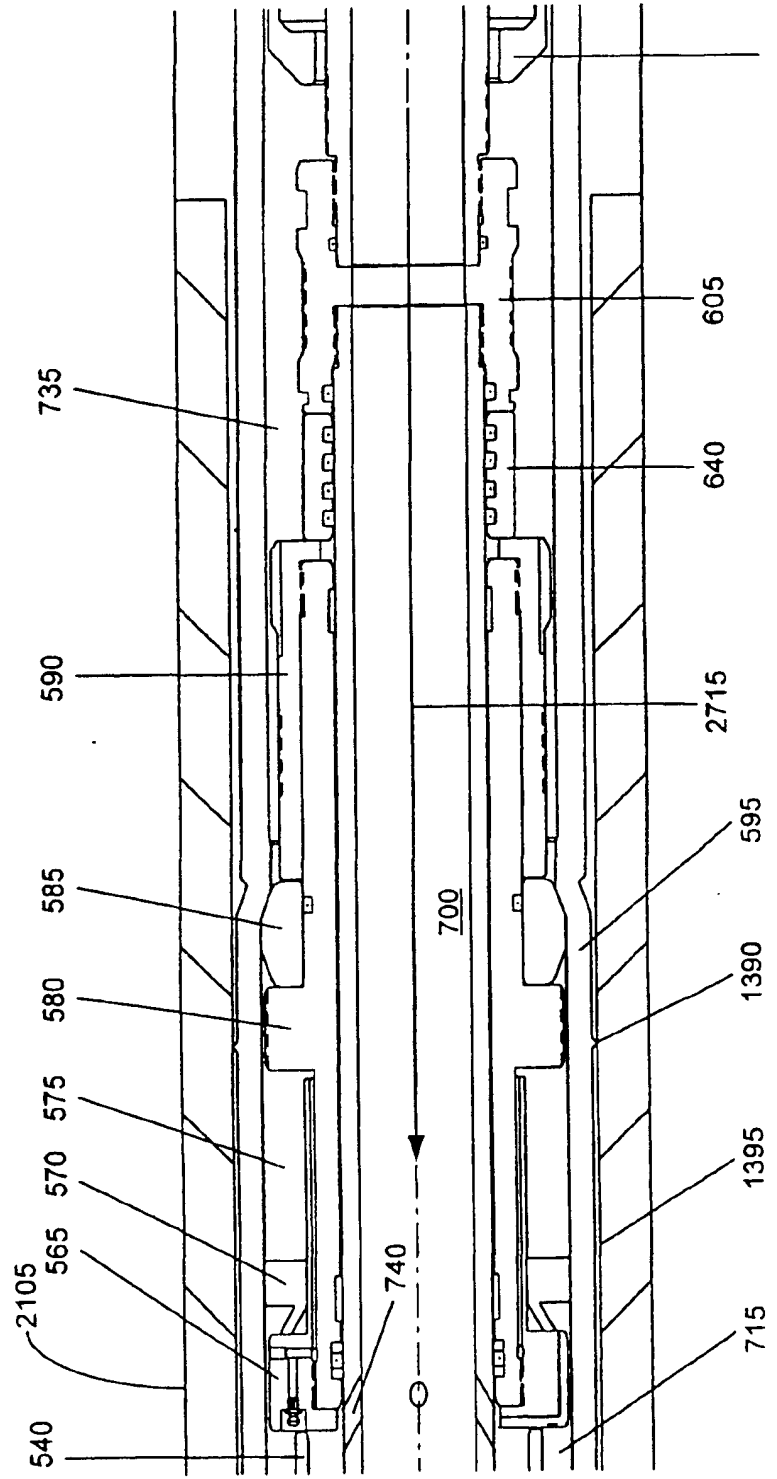


FIGURE 10C

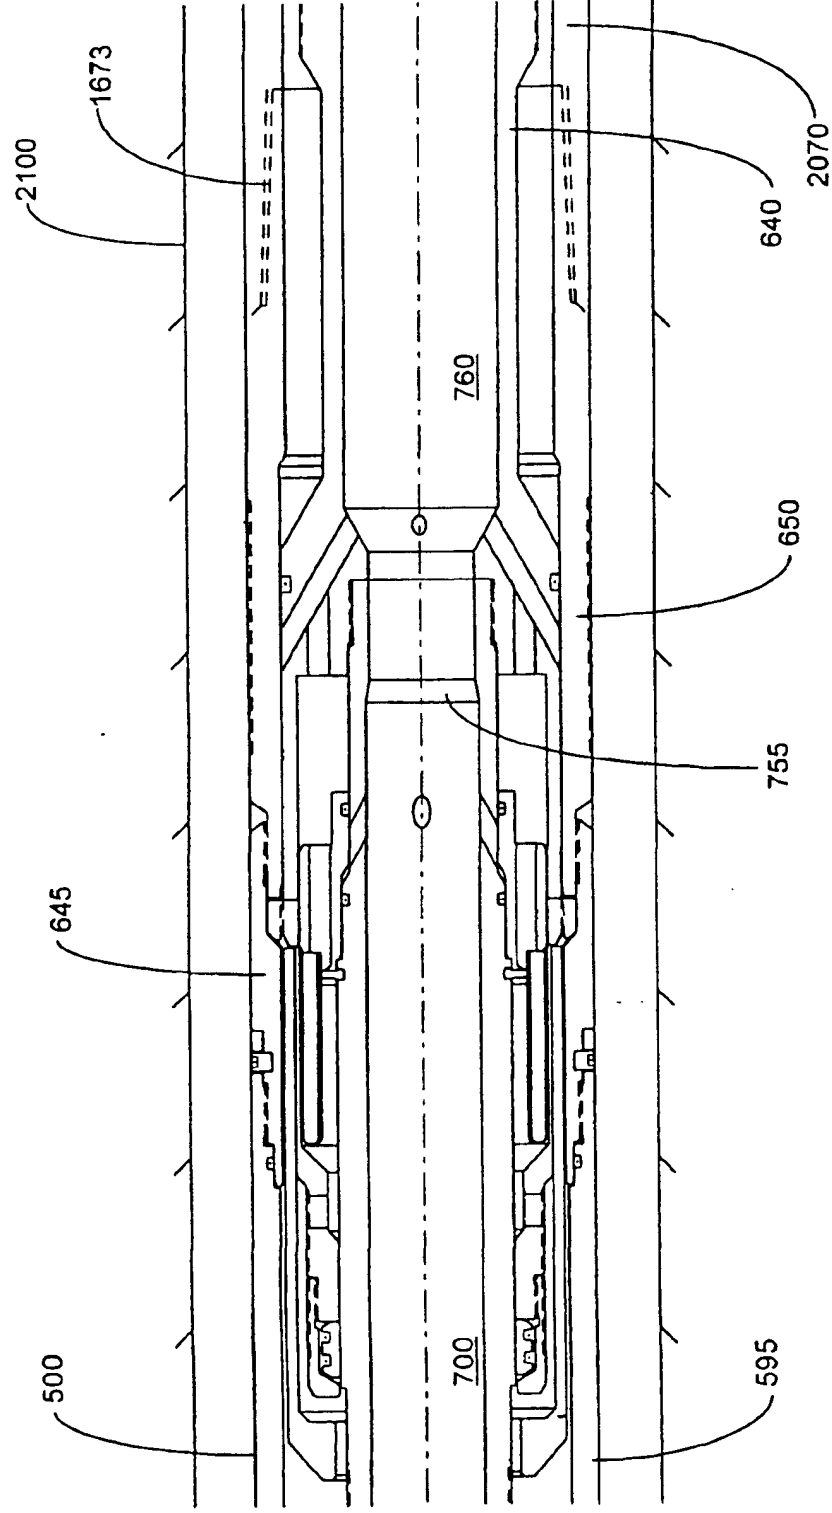


FIGURE 10D

66/79

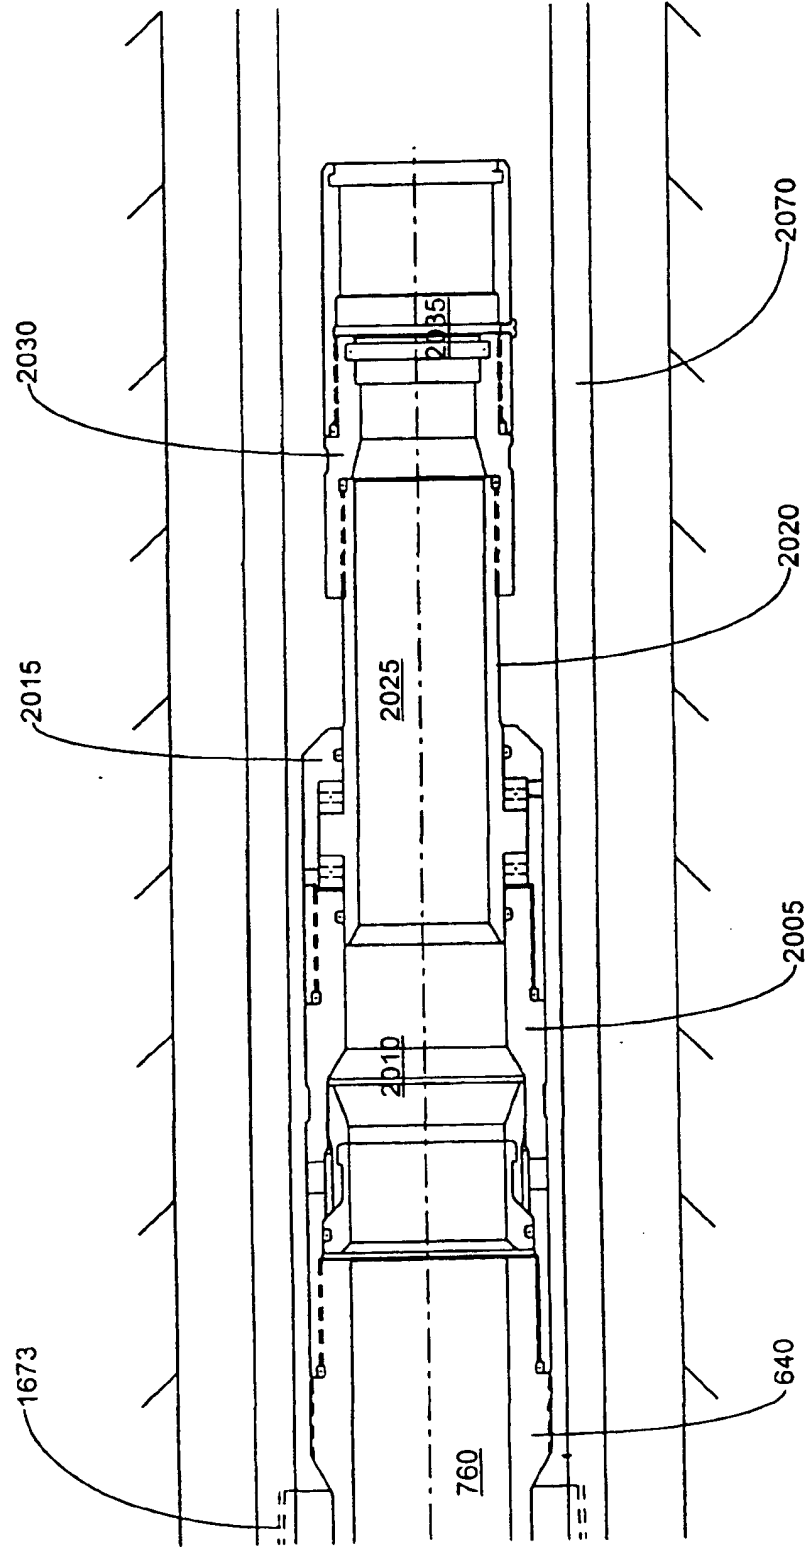


FIGURE 10E

67779

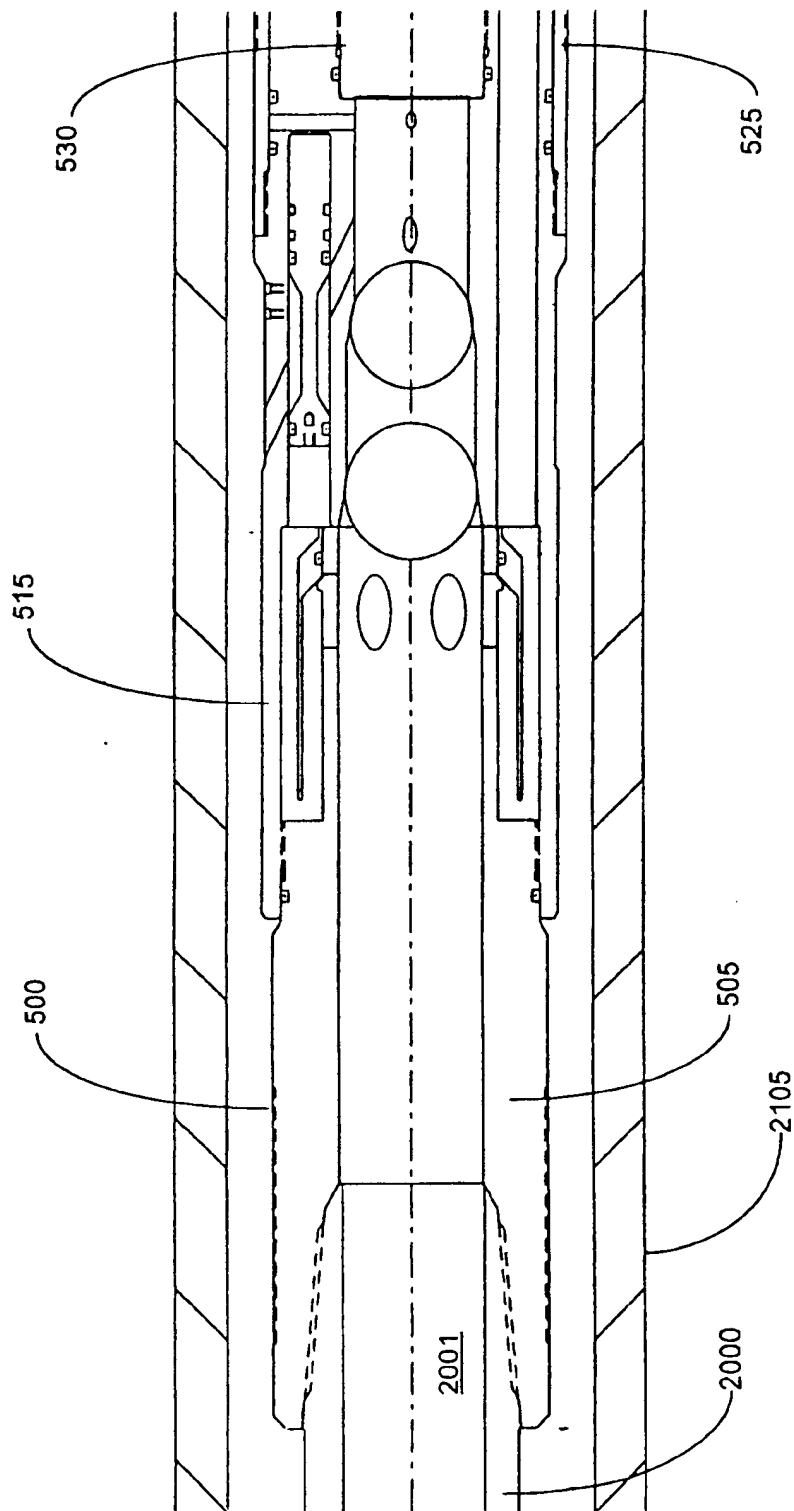


FIGURE 11A

6879

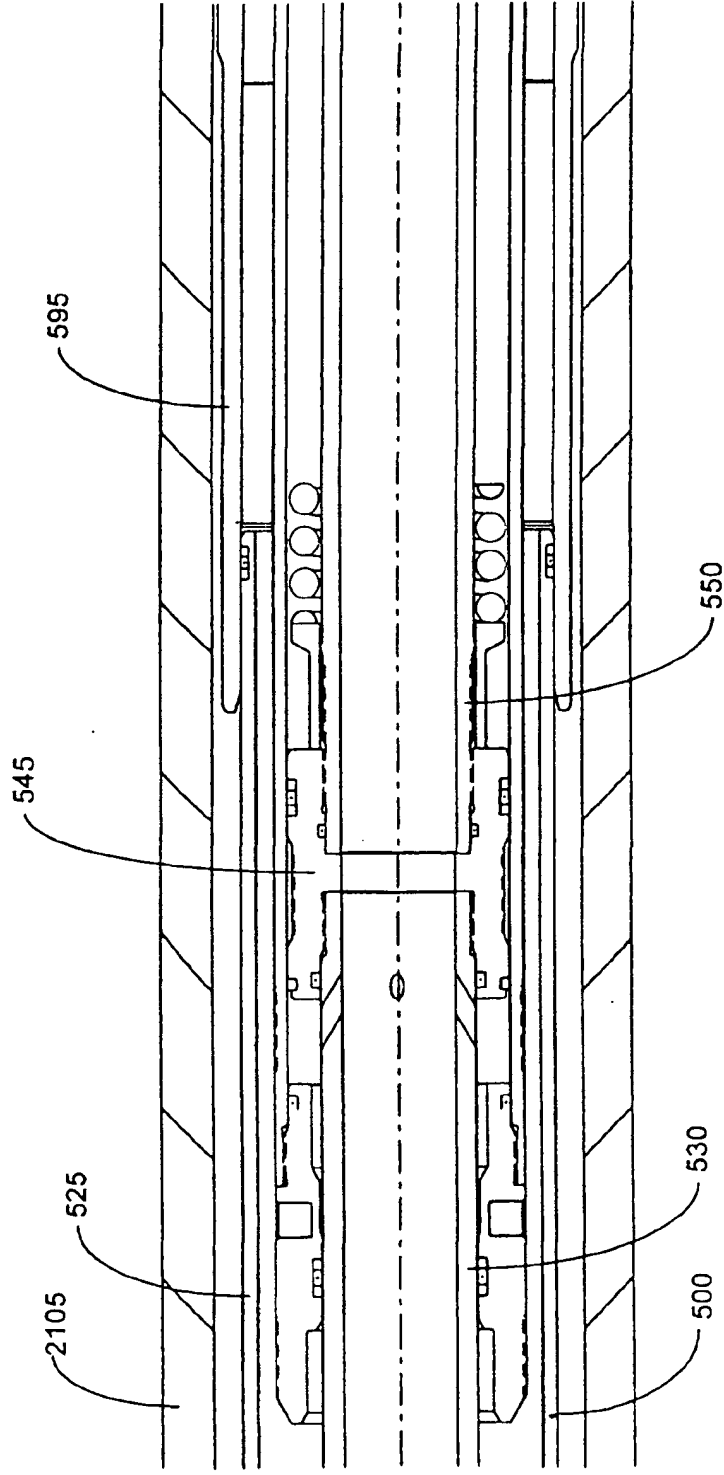


FIGURE 11B

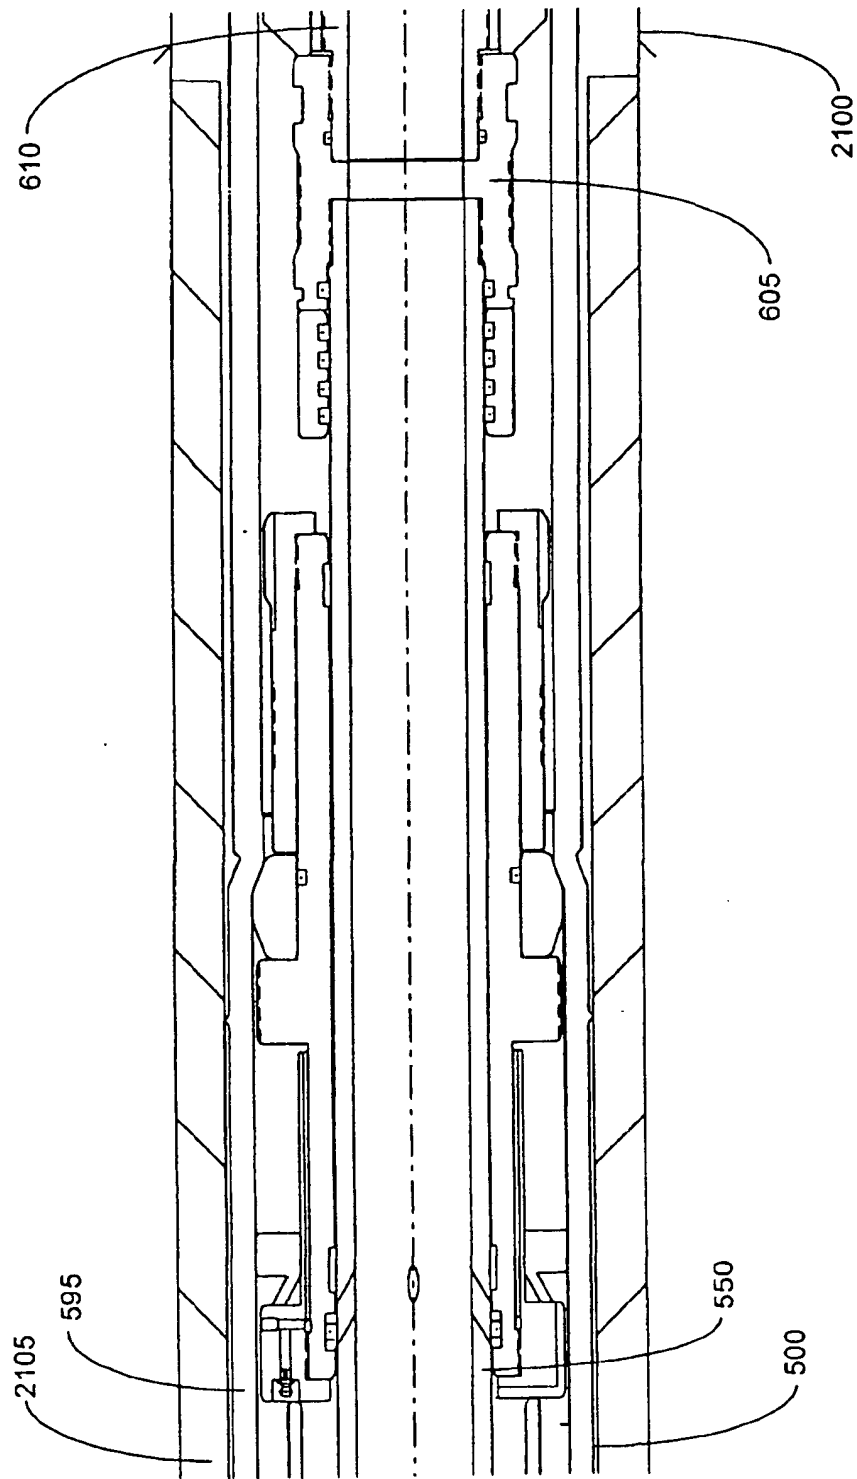


FIGURE 11C

7079

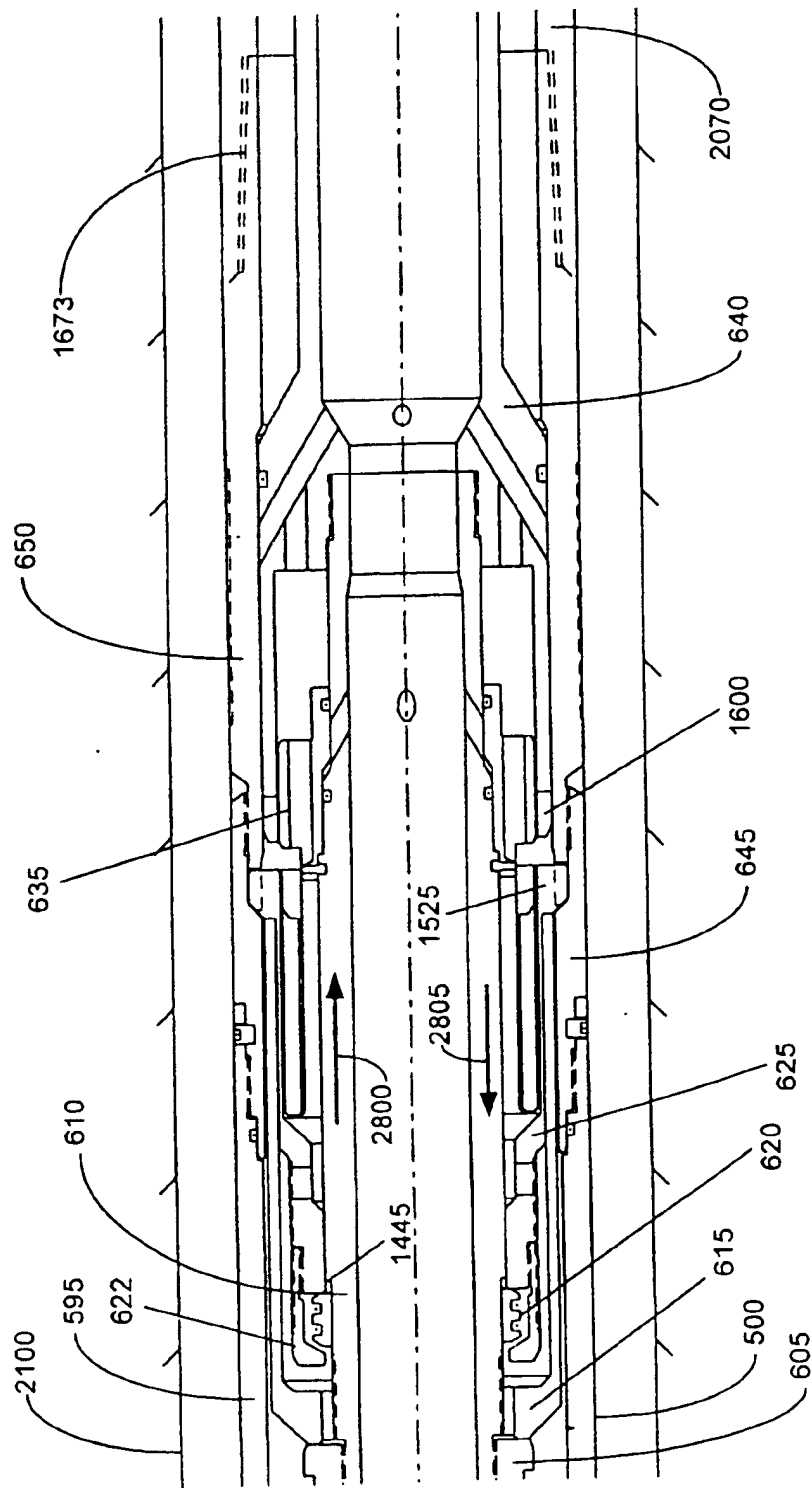


FIGURE 11D

7179

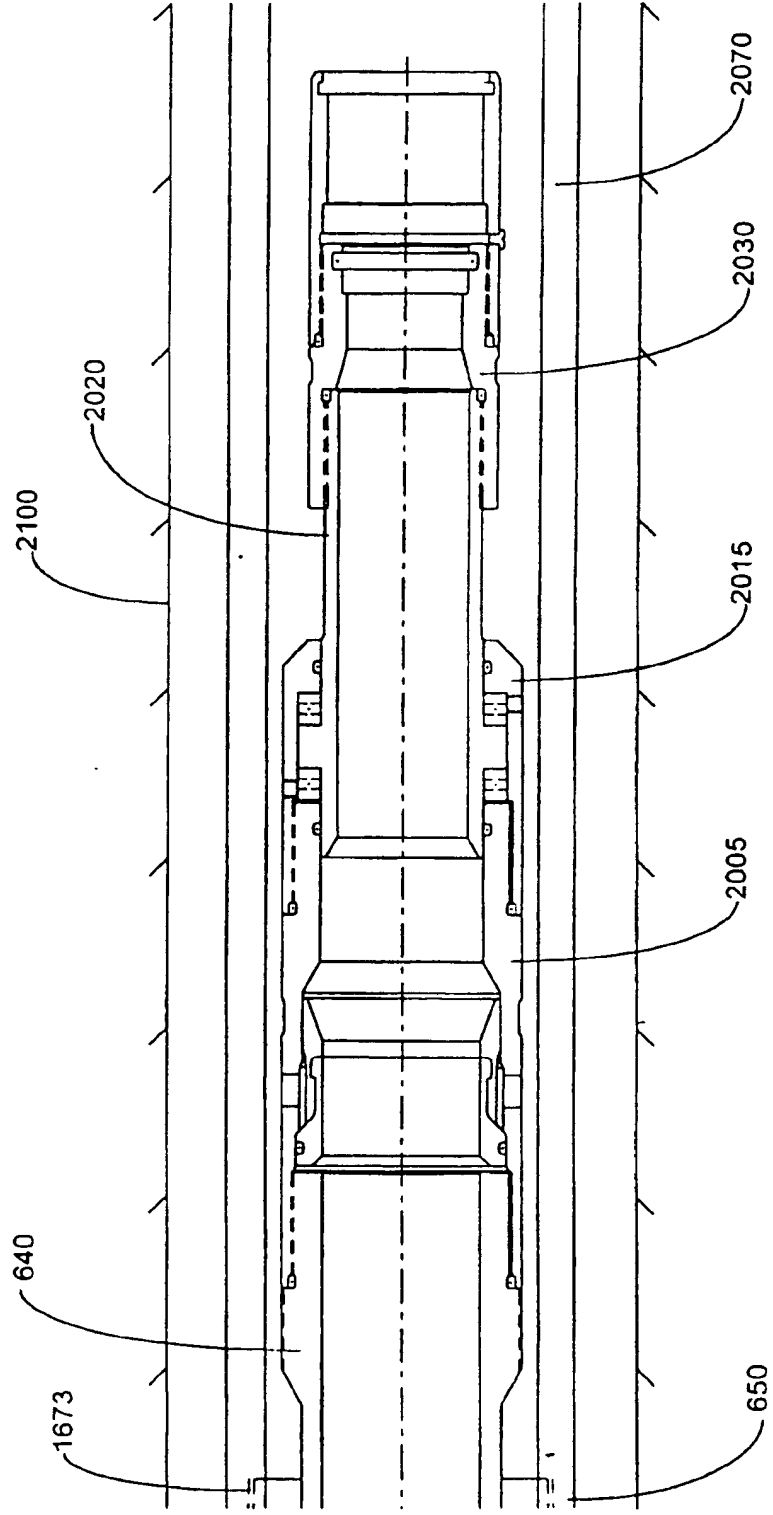


FIGURE 11E

72/79

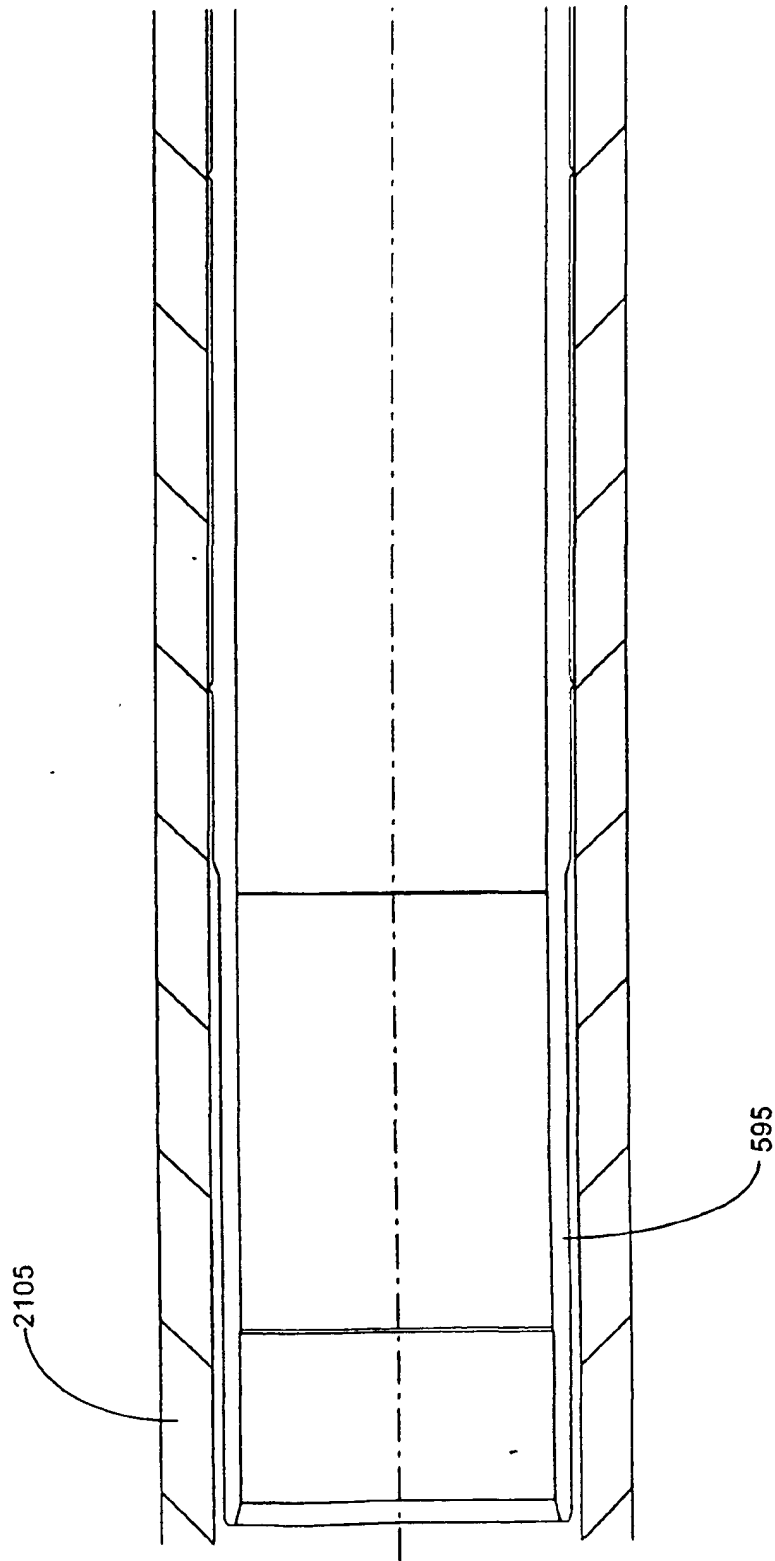


FIGURE 12A

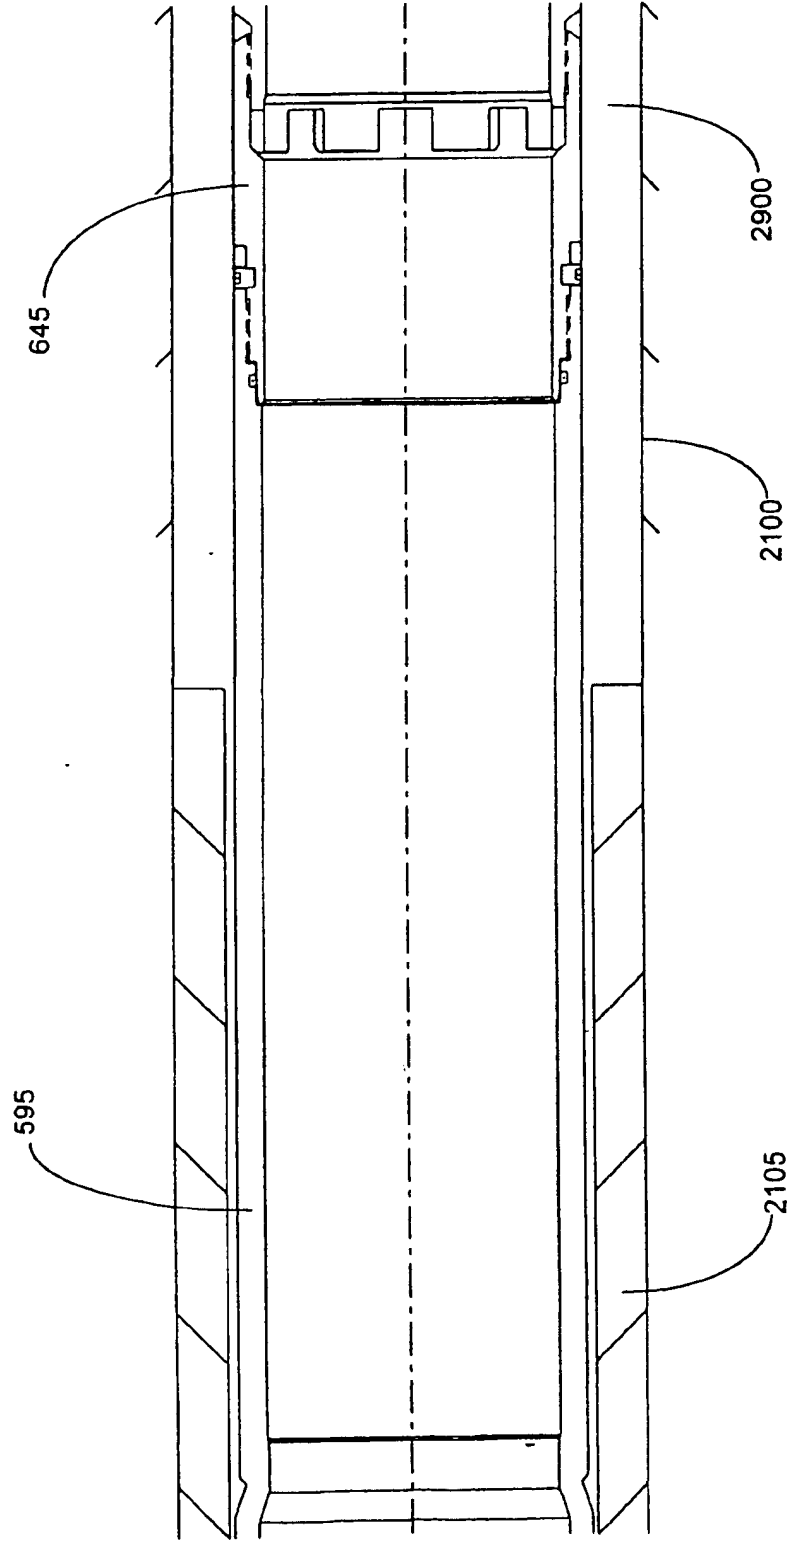


FIGURE 12B

74/79

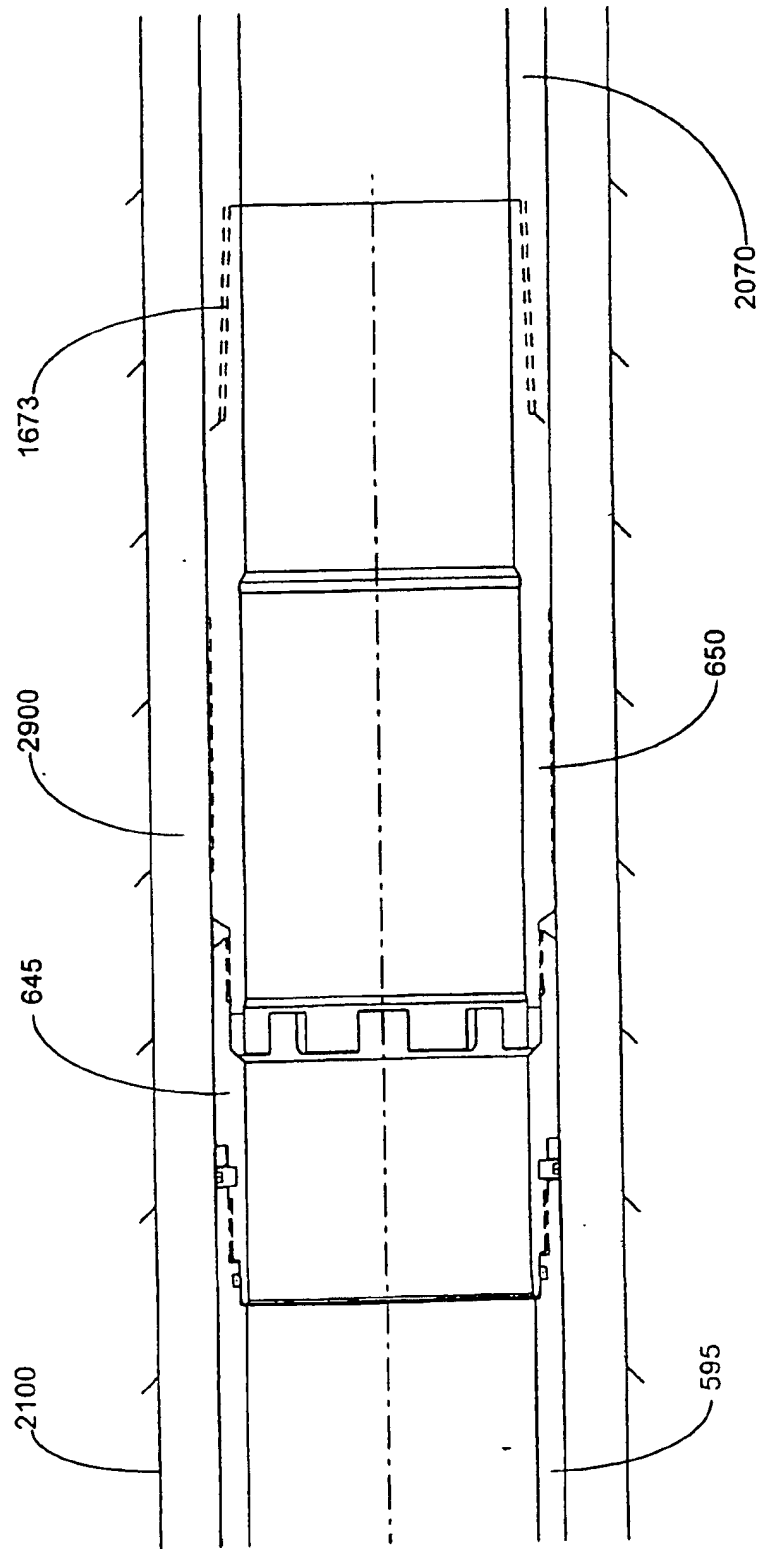


FIGURE 12C

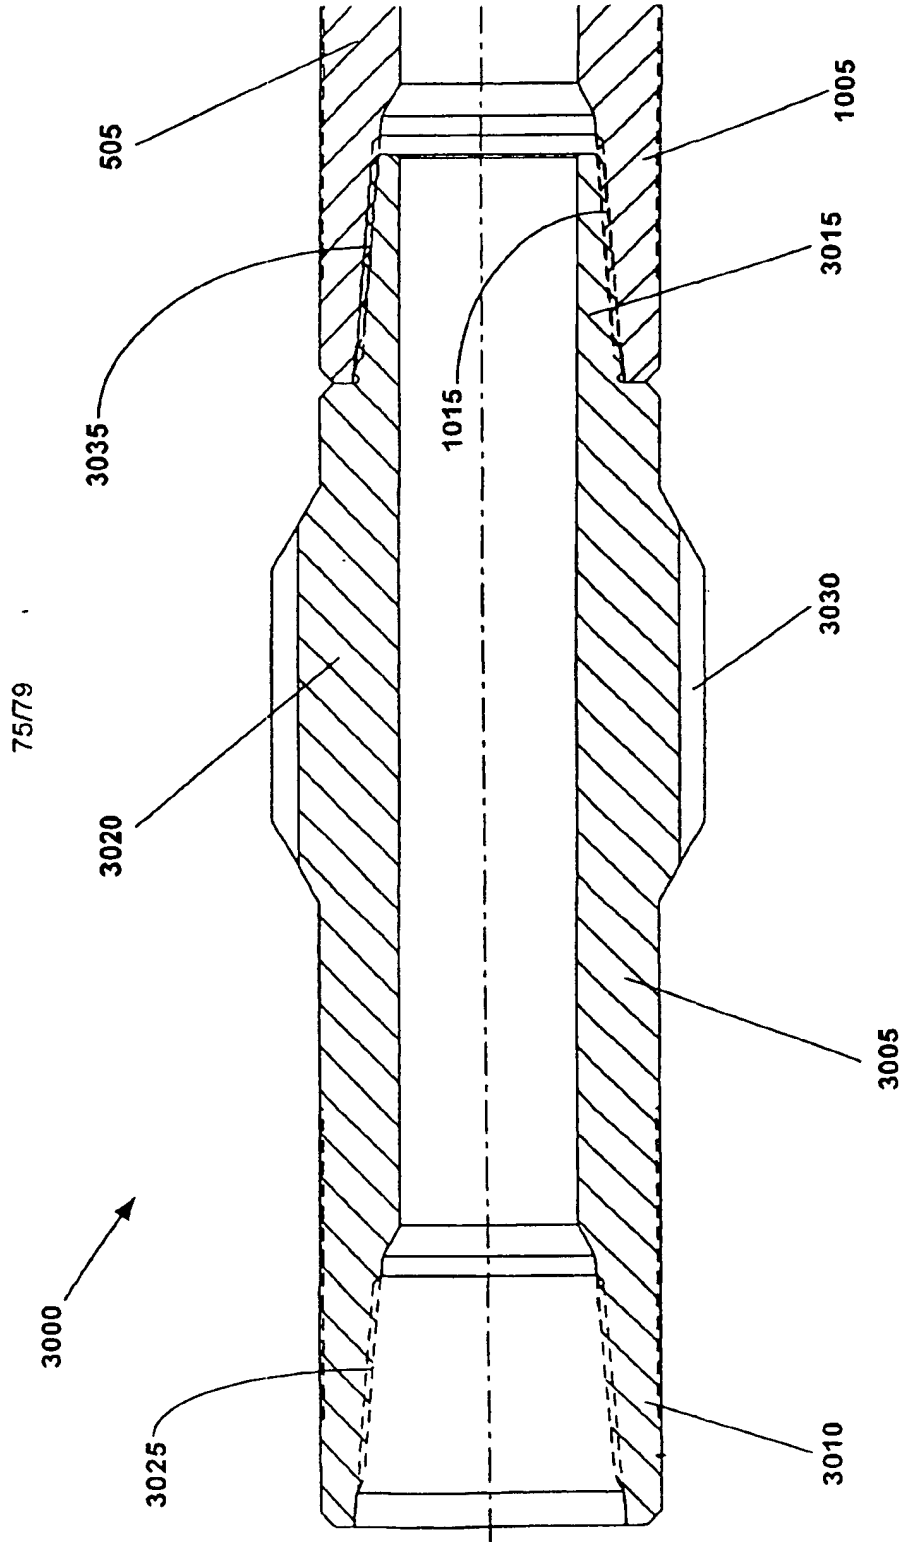


FIGURE 13A

76/79

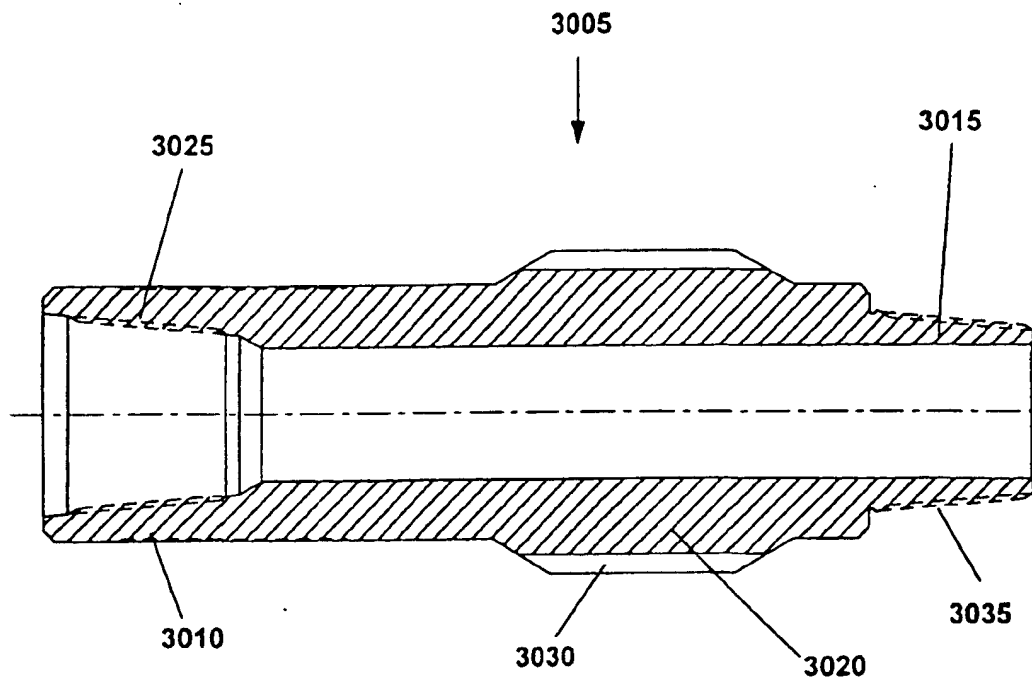


FIGURE 13B

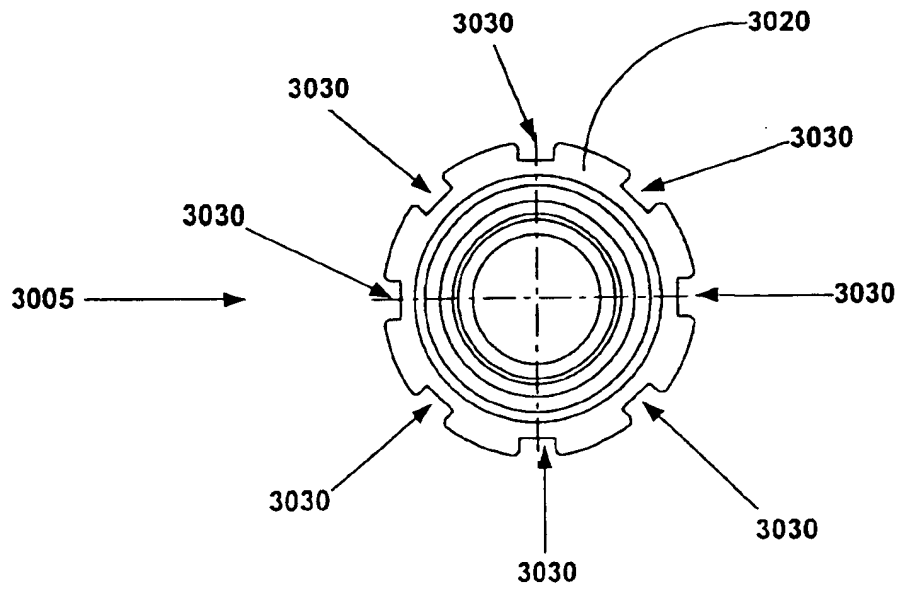


FIGURE 13G

7779

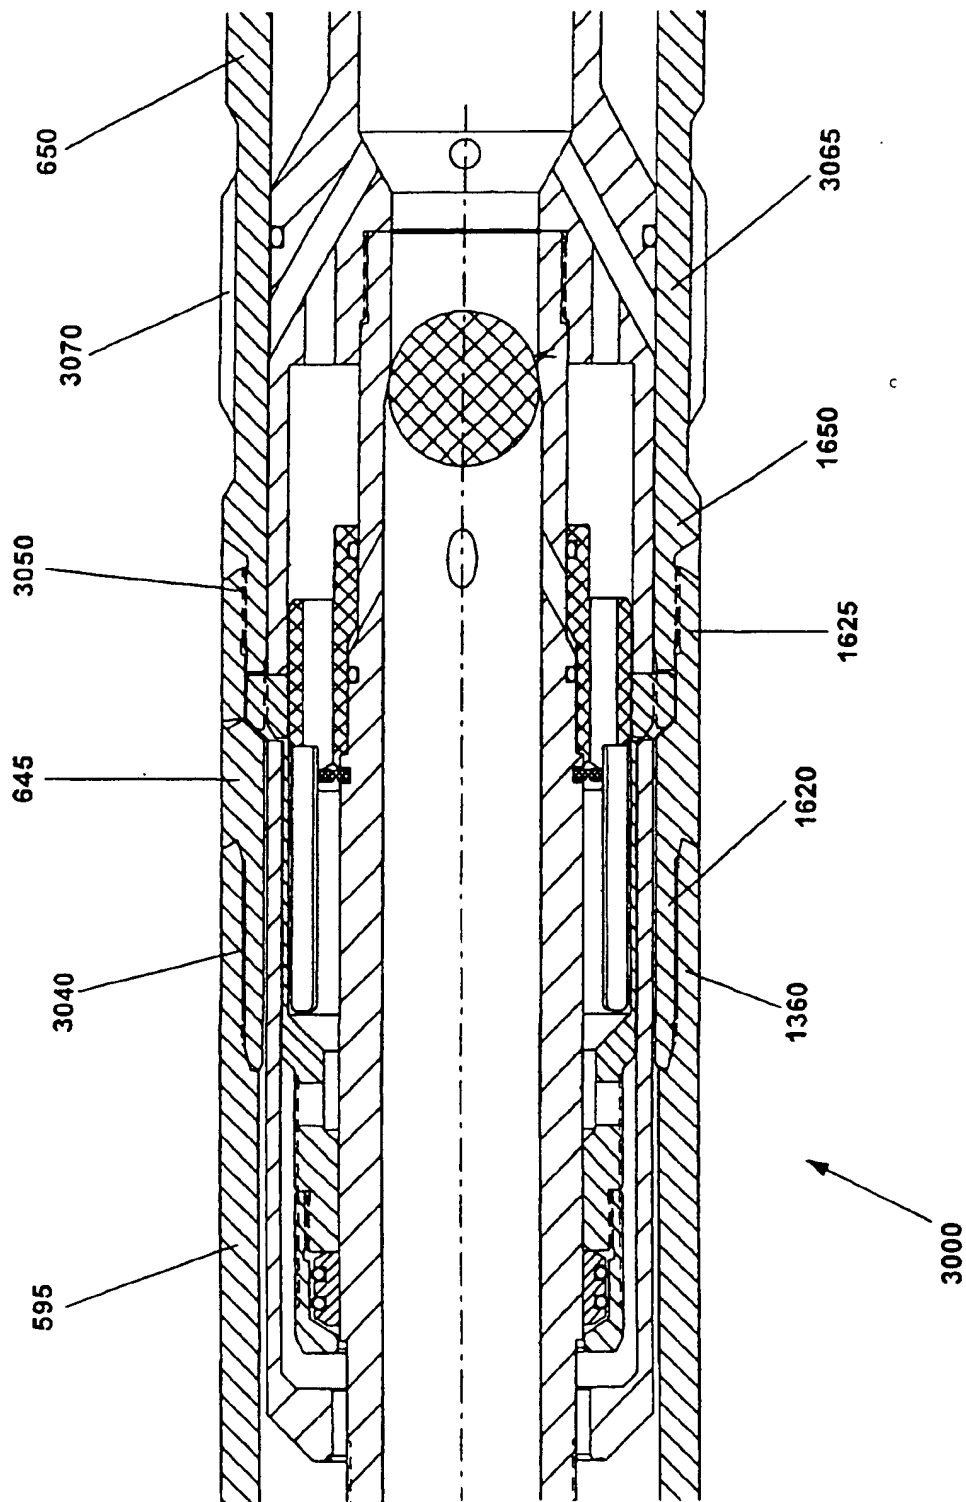


FIGURE 13D

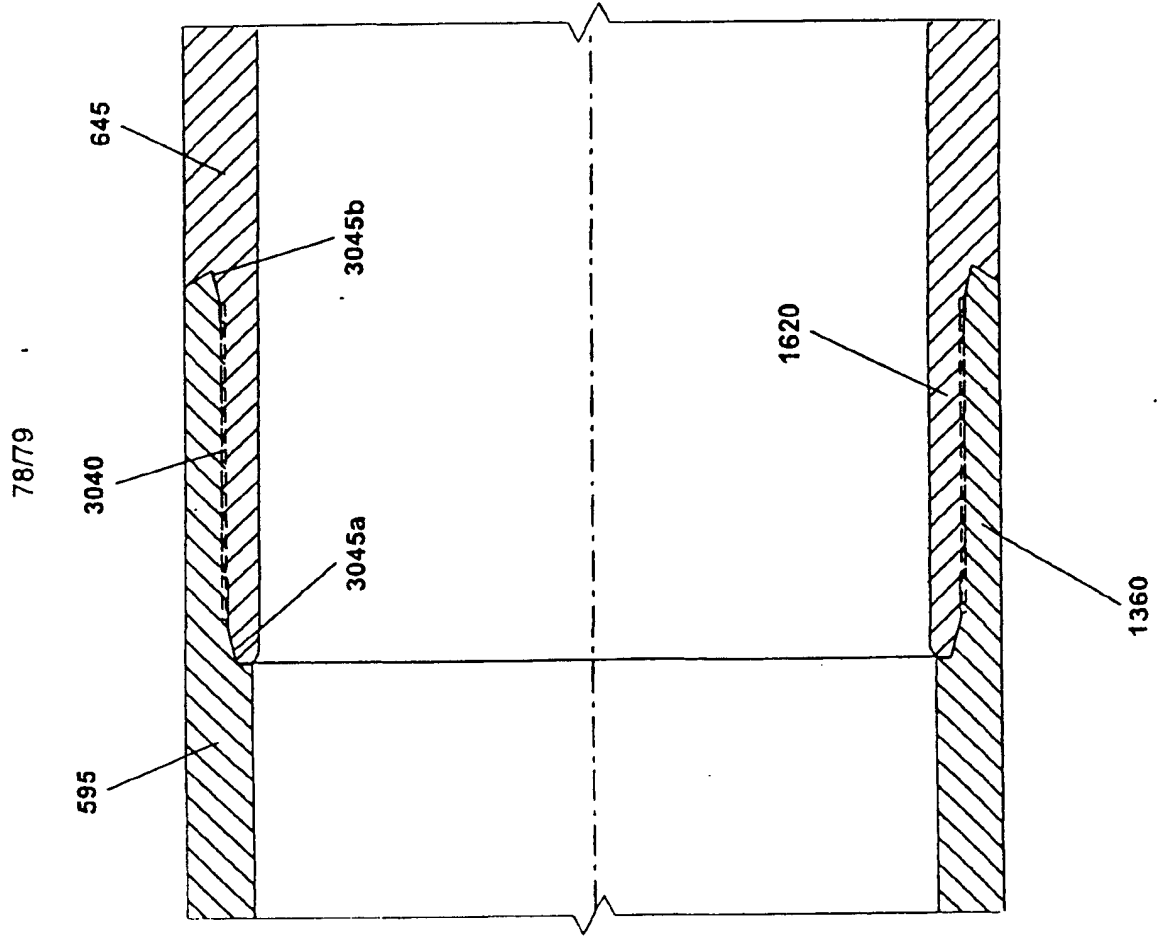


FIGURE 13E

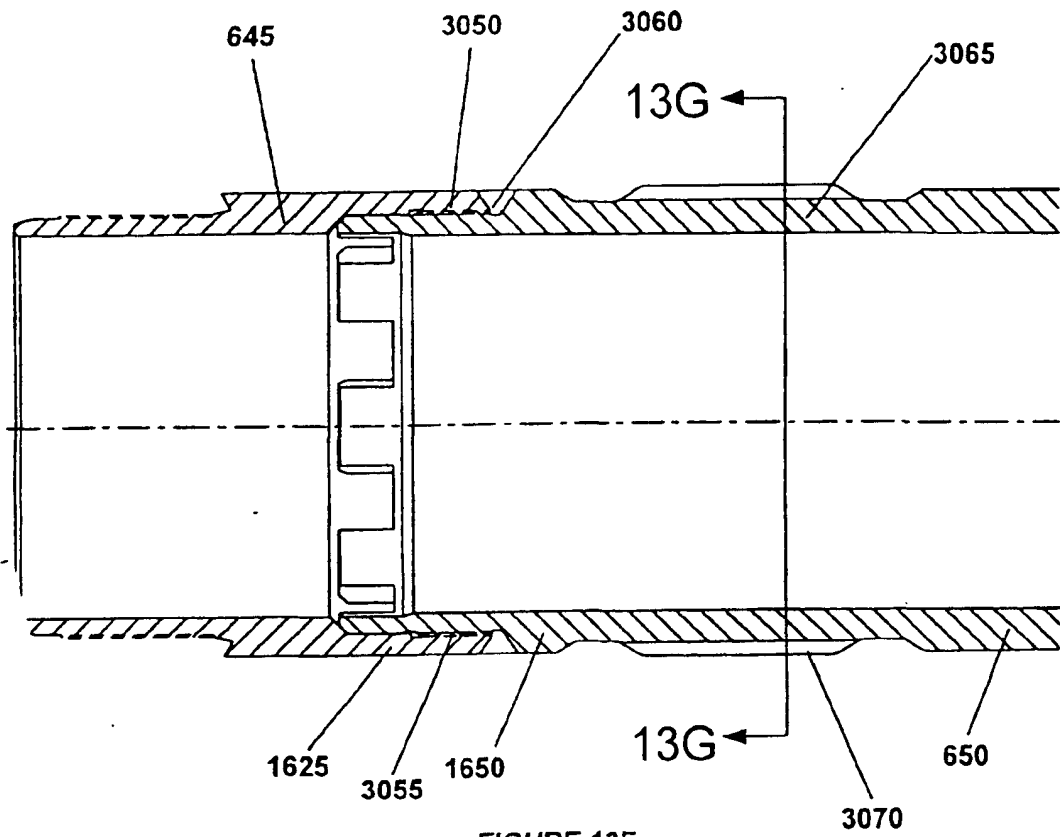


FIGURE 13F

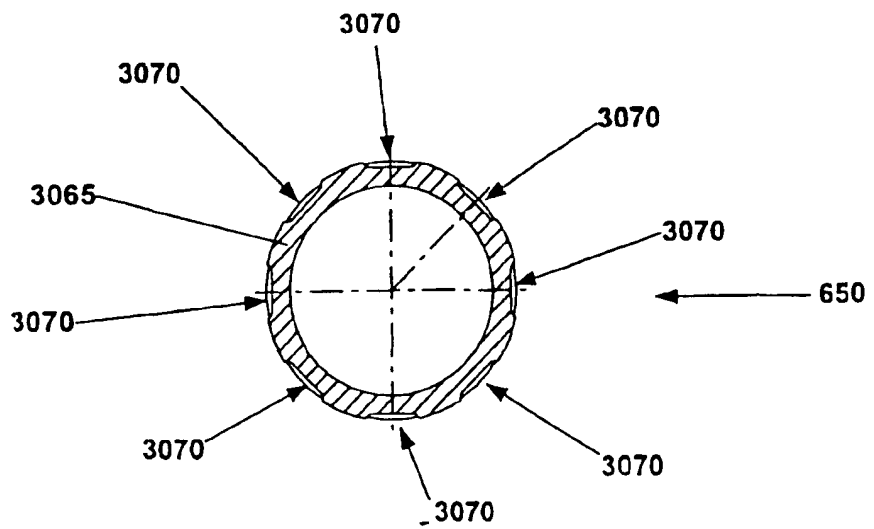


FIGURE 13G

LINER HANGER

Background of the Invention

This invention relates generally to wellbore casings, and in particular to wellbore casings that are formed using expandable tubing.

Conventionally, when a wellbore is created, a number of casings are installed in the borehole to prevent collapse of the borehole wall and to prevent undesired outflow of drilling fluid into the formation or inflow of fluid from the formation into the borehole. The borehole is drilled in intervals whereby a casing which is to be installed in a lower borehole interval is lowered through a previously installed casing of an upper borehole interval. As a consequence of this procedure the casing of the lower interval is of smaller diameter than the casing of the upper interval. Thus, the casings are in a nested arrangement with casing diameters decreasing in downward direction. Cement annuli are provided between the outer surfaces of the casings and the borehole wall to seal the casings from the borehole wall. As a consequence of this nested arrangement a relatively large borehole diameter is required at the upper part of the wellbore. Such a large borehole diameter involves increased costs due to heavy casing handling equipment, large drill bits and increased volumes of drilling fluid and drill cuttings. Moreover, increased drilling rig time is involved due to required cement pumping, cement hardening, required equipment changes due to large variations in hole diameters drilled in the course of the well, and the large volume of cuttings drilled and removed.

Conventionally, at the surface end of the wellbore, a wellhead is formed that typically includes a surface casing, a number of production and/or drilling spools, valving, and a Christmas tree. Typically the wellhead further includes a concentric arrangement of casings including a production casing and one or more intermediate casings. The casings are typically supported using load bearing slips positioned above the ground. The conventional design and construction of wellheads is expensive and complex.

The present invention is directed to overcoming one or more of the limitations of the existing procedures for forming wellbores and wellheads.

Summary of the Invention

According to one aspect of the present invention, an apparatus for coupling a tubular member to a preexisting structure has been described that includes a first support member including a first fluid passage, a manifold
5 coupled to the support member including: a second fluid passage coupled to the first fluid passage including a throat passage adapted to receive a plug, a third fluid passage coupled to the second fluid passage, and a fourth fluid passage coupled to the second fluid passage, a second support member coupled to the manifold including a fifth fluid passage coupled to the second fluid passage, an
10 expansion cone coupled to the second support member, a tubular member coupled to the first support member including one or more sealing members positioned on an exterior surface, a first interior chamber defined by the portion of the tubular member above the manifold, the first interior chamber coupled to the fourth fluid passage, a second interior chamber defined by the
15 portion of the tubular member between the manifold and the expansion cone, the second interior chamber coupled to the third fluid passage, a third interior chamber defined by the portion of the tubular member below the expansion cone, the third interior chamber coupled to the fifth fluid passage, and a shoe coupled to the tubular member including: a throat passage coupled to the third
20 interior chamber adapted to receive a wiper dart, and a sixth fluid passage coupled to the throat passage.

According to another aspect of the present invention, a method of coupling a tubular member to a preexisting structure is provided that includes positioning a support member, an expansion cone, and a tubular member
25 within a preexisting structure, injecting a first quantity of a fluidic material into the preexisting structure below the expansion cone, and injecting a second quantity of a fluidic material into the preexisting structure above the expansion cone.

According to another aspect of the present invention, an apparatus is
30 provided that includes a preexisting structure and an expanded tubular member coupled to the preexisting structure. The expanded tubular member is coupled to the preexisting structure by the process of: positioning a support member, an expansion cone, and the tubular member within the preexisting structure,

injecting a first quantity of a fluidic material into the preexisting structure below the expansion cone, and injecting a second quantity of a fluidic material into the preexisting structure above the expansion cone.

According to another aspect of the present invention, an apparatus for
5 coupling two elements is provided that includes a support member including one or more support member slots, a tubular member including one or more tubular member slots, and a coupling for removably coupling the tubular member to the support member, including: a coupling body movably coupled to
10 the support member, one or more coupling arms extending from the coupling body and coupling elements extending from corresponding coupling arms adapted to mate with corresponding support member and tubular member slots.

According to another aspect of the present invention, a method of
coupling a first member to a second member is provided that includes forming a
15 first set of coupling slots in the first member, forming a second set of coupling slots in the second member, aligning the first and second pairs of coupling slots and inserting coupling elements into each of the pairs of coupling slots.

According to another aspect of the present invention, an apparatus for
controlling the flow of fluidic materials within a housing is provided that
20 includes a first passage within the housing, a throat passage within the housing fluidically coupled to the first passage adapted to receive a plug, a second passage within the housing fluidically coupled to the throat passage, a third passage within the housing fluidically coupled to the first passage, one or more valve chambers within the housing fluidically coupled to the third passage including
25 moveable valve elements, a fourth passage within the housing fluidically coupled to the valve chambers and a region outside of the housing, a fifth passage within the housing fluidically coupled to the second passage and controllably coupled to the valve chambers by corresponding valve elements, and a sixth passage within the housing fluidically coupled to the second passage and the valve
30 chambers.

According to another aspect of the present invention, a method of
controlling the flow of fluidic materials within a housing including an inlet passage and an outlet passage is provided that includes injecting fluidic

materials into the inlet passage, blocking the inlet passage, and opening the outlet passage.

According to another aspect of the present invention, an apparatus is provided that includes a first tubular member, a second tubular member
5 positioned within and coupled to the first tubular member, a first annular chamber defined by the space between the first and second tubular members, an annular piston movably coupled to the second tubular member and positioned within the first annular chamber, an annular sleeve coupled to the
10 annular piston and positioned within the first annular chamber, a third annular member coupled to the second annular member and positioned within and movably coupled to the annular sleeve, a second annular chamber defined by the space between the annular piston, the third annular member, the second tubular member, and the annular sleeve, an inlet passage fluidically coupled to the first annular chamber, and an outlet passage fluidically coupled to the second
15 annular chamber.

According to another aspect of the present invention, a method of applying an axial force to a first piston positioned within a first piston chamber is provided that includes applying an axial force to the first piston using a second piston positioned within the first piston chamber.

According to another aspect of the present invention, an apparatus for radially expanding a tubular member is provided that includes a support member, a tubular member coupled to the support member, a mandrel movably coupled to the support member and positioned within the tubular member, an annular expansion cone coupled to the mandrel and movably coupled to the tubular member for radially expanding the tubular member, and a lubrication assembly coupled to the mandrel for supplying a lubricant to the annular expansion cone, including: a sealing member coupled to the annular member, a body of lubricant positioned in an annular chamber defined by the space between the sealing member, the annular member, and the tubular member, and a lubrication supply passage fluidically coupled to the body of lubricant and the annular expansion cone for supplying a lubricant to the annular expansion cone.

According to another aspect of the present invention, a method of operating an apparatus for radially expanding a tubular member including an expansion cone is provided that includes lubricating the interface between the expansion cone and the tubular member, centrally positioning the expansion cone within the tubular member, and applying a substantially constant axial force to the tubular member prior to the beginning of the radial expansion process.

According to another aspect of the present invention, an apparatus is provided that includes a support member, a tubular member coupled to the support member, an annular expansion cone movably coupled to the support member and the tubular member and positioned within the tubular member for radially expanding the tubular member, and a preload assembly for applying an axial force to the annular expansion cone, including: a compressed spring coupled to the support member for applying the axial force to the annular expansion cone, and a spacer coupled to the support member for controlling the amount of spring compression.

According to another aspect of the present invention, an apparatus for coupling a tubular member to a preexisting structure is provided that includes a support member, a manifold coupled to the support member for controlling the flow of fluidic materials within the apparatus, a radial expansion assembly movably coupled to the support member for radially expanding the tubular member, and a coupling assembly for removably coupling the tubular member to the support member.

According to another aspect of the present invention, an apparatus for coupling a tubular member to a preexisting structure is provided that includes an annular support member including a first passage, a manifold coupled to the annular support member, including: a throat passage fluidically coupled to the first passage adapted to receive a fluid plug, a second passage fluidically coupled to the throat passage, a third passage fluidically coupled to the first passage, a fourth passage fluidically coupled to the third passage, one or more valve chambers fluidically coupled to the fourth passage including corresponding movable valve elements, one or more fifth passages fluidically coupled to the second passage and controllably coupled to corresponding valve chambers by

corresponding movable valve elements, one or more sixth passages fluidically coupled to a region outside of the manifold and to corresponding valve chambers, one or more seventh passages fluidically coupled to corresponding valve chambers and the second passage, and one or more force multiplier supply passages fluidically coupled to the fourth passage, a force multiplier assembly coupled to the annular support member, including: a force multiplier tubular member coupled to the manifold, an annular force multiplier piston chamber defined by the space between the annular support member and the force multiplier tubular member and fluidically coupled to the force multiplier supply passages, an annular force multiplier piston positioned in the annular force multiplier piston chamber and movably coupled to the annular support member, a force multiplier sleeve coupled to the annular force multiplier piston, a force multiplier sleeve sealing member coupled to the annular support member and movably coupled to the force multiplier sleeve for sealing the interface between the force multiplier sleeve and the annular support member, an annular force multiplier exhaust chamber defined by the space between the annular force multiplier piston, the force multiplier sleeve, and the force multiplier sleeve sealing member, and a force multiplier exhaust passage fluidically coupled to the annular force multiplier exhaust chamber and the interior of the annular support member, an expandable tubular member, a radial expansion assembly movably coupled to the annular support member, including: an annular mandrel positioned within the annular force multiplier piston chamber, an annular expansion cone coupled to the annular mandrel and movably coupled to the expandable tubular member, a lubrication assembly coupled to the annular mandrel for supplying lubrication to the interface between the annular expansion cone and the expandable tubular member, a centralizer coupled to the annular mandrel for centering the annular expansion cone within the expandable tubular member, and a preload assembly movably coupled to the annular support member for applying an axial force to the annular mandrel, and a coupling assembly coupled to the annular support member and releasably coupled to the expandable tubular member, including: a tubular coupling member coupled to the expandable tubular member including one or more tubular coupling member slots, an annular support member

coupling interface coupled to the annular support member including one or more annular support member coupling interface slots, and a coupling device for releasably coupling the tubular coupling member to the annular support member coupling interface, including: a coupling device body movably coupled to the annular support member, one or more resilient coupling device arms extending from the coupling device body, and one or more coupling device coupling elements extending from corresponding coupling device arms adapted to removably mate with corresponding tubular coupling member and annular support member coupling slots.

According to another aspect of the present invention, a method of coupling a tubular member to a pre-existing structure is provided that includes positioning an expansion cone and the tubular member within the preexisting structure using a support member, displacing the expansion cone relative to the tubular member in the axial direction, and decoupling the support member from the tubular member.

According to another aspect of the present invention, an apparatus is provided that includes a preexisting structure, and a radially expanded tubular member coupled to the preexisting structure by the process of: positioning an expansion cone and the tubular member within the preexisting structure using a support member, displacing the expansion cone relative to the tubular member in the axial direction, and decoupling the support member from the tubular member.

Brief Description of the Drawings

FIG. 1A is a cross-sectional view illustrating the placement of an embodiment of an apparatus for creating a casing within a well borehole.

FIG. 1B is a cross-sectional view illustrating the injection of a fluidic material into the well borehole of FIG. 1A.

FIG. 1C is a cross-sectional view illustrating the injection of a wiper plug into the apparatus of FIG. 1B.

FIG. 1D is a fragmentary cross-sectional view illustrating the injection of a ball plug and a fluidic material into the apparatus of FIG. 1C.

FIG. 1E is a fragmentary cross-sectional view illustrating the continued injection of fluidic material into the apparatus of FIG. 1D in order to radially expand a tubular member.

FIG. 1F is a cross-sectional view of the completed wellbore casing.

FIG. 2A is a cross-sectional illustration of a portion of an embodiment of an apparatus for forming and/or repairing a wellbore, pipeline or structural support.

FIG. 2B is an enlarged illustration of a portion of the apparatus of FIG. 2A.

FIG. 2C is an enlarged illustration of a portion of the apparatus of FIG. 2A.

FIG. 2D is an enlarged illustration of a portion of the apparatus of FIG. 2A.

FIG. 2E is a cross-sectional illustration of the apparatus of FIG. 2A.

FIG. 2F is a cross-sectional illustration of another portion of the apparatus of FIG. 2A.

FIG. 2G is an enlarged illustration of a portion of the apparatus of FIG. 2F.

FIG. 2H is an enlarged illustration of a portion of the apparatus of FIG. 2F.

FIG. 2I is an enlarged illustration of a portion of the apparatus of FIG. 2F.

FIG. 2J is a cross-sectional illustration of another portion of the apparatus of FIG. 2A.

FIG. 2K is an enlarged illustration of a portion of the apparatus of FIG. 2J.

FIG. 2L is an enlarged illustration of a portion of the apparatus of FIG. 2J.

FIG. 2M is an enlarged illustration of a portion of the apparatus of FIG. 2J.

FIG. 2N is an enlarged illustration of a portion of the apparatus of FIG. 2J.

FIG. 2O is a cross-sectional illustration of the apparatus of FIG. 2J.

FIGS. 3A to 3D are exploded views of a portion of the apparatus of FIGS. 2A to 2O.

FIG. 3E is a cross-sectional illustration of the outer collet support member and the liner hanger setting sleeve of the apparatus of FIGS. 2A to 2O.

FIG. 3F is a front view of the locking dog spring of the apparatus of FIGS. 2A to 2O.

FIG. 3G is a front view of the locking dogs of the apparatus of FIGS. 2A to 2O.

FIG. 3H is a front view of the collet assembly of the apparatus of FIGS. 2A to 2O.

FIG. 3I is a front view of the collet retaining sleeve of the apparatus of FIGS. 2A to 2O.

FIG. 3J is a front view of the collet retaining adaptor of the apparatus of FIGS. 2A to 2O.

FIGS. 4A to 4G are fragmentary cross-sectional illustrations of an embodiment of a method for placing the apparatus of FIGS. 2A-2O within a wellbore.

FIGS. 5A to 5C are fragmentary cross-sectional illustrations of an embodiment of a method for decoupling the liner hanger, the outer collet support member, and the liner hanger setting sleeve from the apparatus of FIGS. 4A to 4G.

FIGS. 6A to 6C are fragmentary cross-sectional illustrations of an embodiment of a method for releasing the lead wiper from the apparatus of FIGS. 4A to 4G.

FIGS. 7A to 7G are fragmentary cross-sectional illustration of an embodiment of a method for cementing the region outside of the apparatus of FIGS. 6A to 6C.

FIGS. 8A to 8C are fragmentary cross-sectional illustrations of an embodiment of a method for releasing the tail wiper from the apparatus of FIGS. 7A to 7G.

FIGS. 9A to 9H are fragmentary cross-sectional illustrations of an embodiment of a method of radially expanding the liner hanger of the apparatus of FIGS. 8A to 8C.

FIGS. 10A to 10E are fragmentary cross-sectional illustrations of the completion of the radial expansion of the liner hanger using the apparatus of FIGS. 9A to 9H.

FIGS. 11A to 11E are fragmentary cross-sectional illustrations of the decoupling of the radially expanded liner hanger from the apparatus of FIGS. 10A to 10E.

FIGS. 12A to 12C are fragmentary cross-sectional illustrations of the completed wellbore casing.

FIG. 13A is a cross-sectional illustration of a portion of an alternative embodiment of an apparatus for forming and/or repairing a wellbore, pipeline or structural support.

FIG. 13B is a cross-sectional view of the standoff adaptor of the apparatus of FIG. 13A.

FIG. 13C is a front view of the standoff adaptor of FIG. 13B.

FIG. 13D is a cross-sectional illustration of another portion of an alternative embodiment of the apparatus of FIG. 13A.

FIG. 13E is an enlarged view of the threaded connection between the liner hanger and the outer collet support member of FIG. 13D.

FIG. 13F is an enlarged view of the connection between the outer collet support member 645 and the liner hanger setting sleeve 650 of FIG. 13D.

FIG. 13G is a cross-sectional view of the liner hanger setting sleeve of FIG. 13F.

Detailed Description of the Illustrative Embodiments

An apparatus and method for forming a wellbore casing within a subterranean formation is provided. The apparatus and method permits a wellbore casing to be formed in a subterranean formation by placing a tubular member and a mandrel in a new section of a wellbore, and then extruding the tubular member off of the mandrel by pressurizing an interior portion of the tubular member. The apparatus and method further permits adjacent tubular members in the wellbore to be joined using an overlapping joint that prevents fluid and or gas passage. The apparatus and method further permits a new tubular member to be supported by an existing tubular member by expanding the new tubular member into engagement with the existing tubular member.

The apparatus and method further minimizes the reduction in the hole size of the wellbore casing necessitated by the addition of new sections of wellbore casing.

A crossover valve apparatus and method for controlling the radial expansion of a tubular member is also provided. The crossover valve assembly permits the initiation of the radial expansion of a tubular member to be precisely initiated and controlled.

A force multiplier apparatus and method for applying an axial force to an expansion cone is also provided. The force multiplier assembly permits the amount of axial driving force applied to the expansion cone to be increased. In this manner, the radial expansion process is improved.

A radial expansion apparatus and method for radially expanding a tubular member is also provided. The radial expansion apparatus preferably includes a mandrel, an expansion cone, a centralizer, and a lubrication assembly for lubricating the interface between the expansion cone and the tubular member. The radial expansion apparatus improves the efficiency of the radial expansion process.

A preload assembly for applying a predetermined axial force to an expansion cone is also provided. The preload assembly preferably includes a compressed spring and a spacer for controlling the amount of compression of the spring. The compressed spring in turn is used to apply an axial force to the expansion cone. The preload assembly improves the radial expansion process by presetting the position of the expansion cone using a predetermined axial force.

A coupling assembly for controllably removably coupling an expandable tubular member to a support member is also provided. The coupling assembly preferably includes an emergency release in order to permit the coupling assembly to be decoupled in an emergency.

In several alternative embodiments, the apparatus and methods are used to form and/or repair wellbore casings, pipelines, and/or structural supports.

Referring initially to Figs. 1A-1F, an embodiment of an apparatus and method for forming a wellbore casing within a subterranean formation will now be described. As illustrated in Fig. 1A, a wellbore 100 is positioned in a

subterranean formation 105. The wellbore 100 includes an existing cased section 110 having a tubular casing 115 and an annular outer layer of cement 120.

As illustrated in Fig. 1A, an apparatus 200 for forming a wellbore casing in a subterranean formation is then positioned in the wellbore 100. The apparatus 200 preferably includes a first support member 205, a manifold 210, a second support member 215, a tubular member 220, a shoe 225, an expansion cone 230, first sealing members 235, second sealing members 240, third sealing members 245, fourth sealing members 250, an anchor 255, a first passage 260, a second passage 265, a third passage 270, a fourth passage 275, a throat 280, a fifth passage 285, a sixth passage 290, a seventh passage 295, an annular chamber 300, a chamber 305, and a chamber 310. In a preferred embodiment, the apparatus 200 is used to radially expand the tubular member 220 into intimate contact with the tubular casing 115. In this manner, the tubular member 220 is coupled to the tubular casing 115. In this manner, the apparatus 200 is preferably used to form or repair a wellbore casing, a pipeline, or a structural support. In a particularly preferred embodiment, the apparatus is used to repair or form a wellbore casing.

The first support member 205 is coupled to a conventional surface support and the manifold 210. The first support member 205 may be fabricated from any number of conventional commercially available tubular support members. In a preferred embodiment, the first support member 205 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the first support member 205 further includes the first passage 260 and the second passage 265.

The manifold 210 is coupled to the first support member 205, the second support member 215, the sealing members 235a and 235b, and the tubular member 200. The manifold 210 preferably includes the first passage 260, the third passage 270, the fourth passage 275, the throat 280 and the fifth passage 285. The manifold 210 may be fabricated from any number of conventional tubular members.

The second support member 215 is coupled to the manifold 210, the sealing members 245a, 245b, and 245c, and the expansion cone 230. The second support member 215 may be fabricated from any number of conventional commercially available tubular support members. In a preferred embodiment, the second support member 215 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the second support member 215 further includes the fifth passage 285.

The tubular member 220 is coupled to the sealing members 235a and 235b and the shoe 225. The tubular member 220 is further movably coupled to the expansion cone 230 and the sealing members 240a and 240b. The first support member 205 may comprise any number of conventional tubular members. The tubular member 220 may be fabricated from any number of conventional commercially available tubular members. In a preferred embodiment, the tubular member 220 is further provided substantially as described in one or more of the following: (1) U.S. Patent Application Serial No. _____, attorney docket number 25791.9.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/108,558, attorney docket number 25791.9, filed on 11/16/1998, (2) U.S. Patent Application Serial No. _____, attorney docket number 25791.3.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/111,293, filed on 12/7/1998, (3) U.S. Patent Application Serial Number _____, attorney docket number 25791.8.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/119,611, attorney docket number 25791.8, filed 2/11/1999, (4) U.S. Patent Application Serial Number _____, attorney docket number 25791.7.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/121,702, attorney docket number 25791.7, filed on 2/25/1999, (5) U.S. Patent Application Serial Number _____, attorney docket number 25791.16.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional

Patent Application number 60/121,907, attorney docket number 25791.16, filed 2/26/1999, (6) U.S. Provisional Patent Application Serial Number 60/124,042, attorney docket number 25791.11, filed on 3/11/1999, (7) U.S. Provisional Patent Application Serial Number 60/131,106, attorney docket number 25791.23, filed on 4/26/1999, (8) U.S. Provisional Patent Application Serial Number 60/137,998, attorney docket number 25791.17, filed on 6/7/1999, (9) U.S. Provisional Patent Application Serial Number 60/143,039, attorney docket number 25791.26, filed on 7/9/1999, and (10) U.S. Provisional Patent Application Serial Number 60/146,203, attorney docket number 25791.25, filed on 7/29/1999, the disclosures of which are incorporated by reference.

The shoe 225 is coupled to the tubular member 220. The shoe 225 preferably includes the sixth passage 290 and the seventh passage 295. The shoe 225 preferably is fabricated from a tubular member. In a preferred embodiment, the shoe 225 is further provided substantially as described in one or more of the following: (1) U.S. Patent Application Serial No. _____, attorney docket number 25791.9.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/108,558, attorney docket number 25791.9, filed on 11/16/1998, (2) U.S. Patent Application Serial No. _____, attorney docket number 25791.3.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/111,293, filed on 12/7/1998, (3) U.S. Patent Application Serial Number _____, attorney docket number 25791.8.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/119,611, attorney docket number 25791.8, filed 2/11/1999, (4) U.S. Patent Application Serial Number _____, attorney docket number 25791.7.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/121,702, attorney docket number 25791.7, filed on 2/25/1999, (5) U.S. Patent Application Serial Number _____, attorney docket number 25791.16.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application number 60/121,907, attorney docket number 25791.16, filed 2/26/1999, (6) U.S. Provisional Patent Application Serial Number 60/124,042,

attorney docket number 25791.11, filed on 3/11/1999, (7) U.S. Provisional Patent Application Serial Number 60/131,106, attorney docket number 25791.23, filed on 4/26/1999, (8) U.S. Provisional Patent Application Serial Number 60/137,998, attorney docket number 25791.17, filed on 6/7/1999, (9) U.S. Provisional Patent Application Serial Number 60/143,039, attorney docket number 25791.26, filed on 7/9/1999, and (10) U.S. Provisional Patent Application Serial Number 60/146,203, attorney docket number 25791.25, filed on 7/29/1999, the disclosures of which are incorporated by reference.

The expansion cone 230 is coupled to the sealing members 240a and 240b and the sealing members 245a, 245b, and 245c. The expansion cone 230 is movably coupled to the second support member 215 and the tubular member 220. The expansion cone 230 preferably includes an annular member having one or more outer conical surfaces for engaging the inside diameter of the tubular member 220. In this manner, axial movement of the expansion cone 230 radially expands the tubular member 220. In a preferred embodiment, the expansion cone 230 is further provided substantially as described in one or more of the following: (1) U.S. Patent Application Serial No. _____, attorney docket number 25791.9.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/108,558, attorney docket number 25791.9, filed on 11/16/1998, (2) U.S. Patent Application Serial No. _____, attorney docket number 25791.3.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/111,293, filed on 12/7/1998, (3) U.S. Patent Application Serial Number _____, attorney docket number 25791.8.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/119,611, attorney docket number 25791.8, filed 2/11/1999, (4) U.S. Patent Application Serial Number _____, attorney docket number 25791.7.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/121,702, attorney docket number 25791.7, filed on 2/25/1999, (5) U.S. Patent Application Serial Number _____, attorney docket number 25791.16.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application number

60/121,907, attorney docket number 25791.16, filed 2/26/1999, (6) U.S. Provisional Patent Application Serial Number 60/124,042, attorney docket number 25791.11, filed on 3/11/1999, (7) U.S. Provisional Patent Application Serial Number 60/131,106, attorney docket number 25791.23, filed on 4/26/1999, (8) U.S. Provisional Patent Application Serial Number 60/137,998, attorney docket number 25791.17, filed on 6/7/1999, (9) U.S. Provisional Patent Application Serial Number 60/143,039, attorney docket number 25791.26, filed on 7/9/1999, and (10) U.S. Provisional Patent Application Serial Number 60/146,203, attorney docket number 25791.25, filed on 7/29/1999, the disclosures of which are incorporated by reference.

The first sealing members 235a and 235b are coupled to the manifold 210 and the tubular member 220. The first sealing members 235a and 235b preferably fluidically isolate the annular chamber 300 from the chamber 310. In this manner, annular chamber 300 is optimally pressurized during operation of the apparatus 200. The first sealing members 235a and 235b may comprise any number of conventional commercially available sealing members. In a preferred embodiment, the first sealing members 235a and 235b include O-rings with seal backups available from Parker Seals in order to provide a fluidic seal between the tubular member 200 and the expansion cone 230 during axial movement of the expansion cone 230.

In a preferred embodiment, the first sealing member 235a and 235b further include conventional controllable latching members for removably coupling the manifold 210 to the tubular member 200. In this manner, the tubular member 200 is optimally supported by the manifold 210. Alternatively, the tubular member 200 is preferably removably supported by the first support member 205 using conventional controllable latching members.

The second sealing members 240a and 240b are coupled to the expansion cone 230. The second sealing members 240a and 240b are movably coupled to the tubular member 220. The second sealing members 240a and 240b preferably fluidically isolate the annular chamber 300 from the chamber 305 during axial movement of the expansion cone 230. In this manner, the annular chamber 300 is optimally pressurized. The second sealing members 240a and

240b may comprise any number of conventional commercially available sealing members.

In a preferred embodiment, the second sealing members 240a and 240b further include a conventional centralizer and/or bearings for supporting and positioning the expansion cone 230 within the tubular member 200 during axial movement of the expansion cone 230. In this manner, the position and orientation of the expansion cone 230 is optimally controlled during axial movement of the expansion cone 230.

The third sealing members 245a, 245b, and 245c are coupled to the expansion cone 230. The third sealing members 245a, 245b, and 245c are movably coupled to the second support member 215. The third sealing members 245a, 245b, and 245c preferably fluidically isolate the annular chamber 300 from the chamber 305 during axial movement of the expansion cone 230. In this manner, the annular chamber 300 is optimally pressurized. The third sealing members 245a, 245b and 240c may comprise any number of conventional commercially available sealing members. In a preferred embodiment, the third sealing members 245a, 245b, and 245c include O-rings with seal backups available from Parker Seals in order to provide a fluidic seal between the expansion cone 230 and the second support member 215 during axial movement of the expansion cone 230.

In a preferred embodiment, the third sealing members 245a, 245b and 240c further include a conventional centralizer and/or bearings for supporting and positioning the expansion cone 230 around the second support member 215 during axial movement of the expansion cone 230. In this manner, the position and orientation of the expansion cone 230 is optimally controlled during axial movement of the expansion cone 230.

The fourth sealing member 250 is coupled to the tubular member 220. The fourth sealing member 250 preferably fluidically isolates the chamber 315 after radial expansion of the tubular member 200. In this manner, the chamber 315 outside of the radially expanded tubular member 200 is fluidically isolated. The fourth sealing member 250 may comprise any number of conventional commercially available sealing members. In a preferred embodiment, the

fourth sealing member 250 is a RTTS packer ring available from Halliburton Energy Services in order to optimally provide a fluidic seal.

The anchor 255 is coupled to the tubular member 220. The anchor 255 preferably anchors the tubular member 200 to the casing 115 after radial expansion of the tubular member 200. In this manner, the radially expanded tubular member 200 is optimally supported within the wellbore 100. The anchor 255 may comprise any number of conventional commercially available anchoring devices. In a preferred embodiment, the anchor 255 includes RTTS mechanical slips available from Halliburton Energy Services in order to optimally anchor the tubular member 200 to the casing 115 after the radial expansion of the tubular member 200.

The first passage 260 is fluidically coupled to a conventional surface pump, the second passage 265, the third passage 270, the fourth passage 275, and the throat 280. The first passage 260 is preferably adapted to convey fluidic materials including drilling mud, cement and/or lubricants at flow rates and pressures ranging from about 0 to 650 gallons/minute and 0 to 10,000 psi, respectively in order to optimally form an annular cement liner and radially expand the tubular member 200.

The second passage 265 is fluidically coupled to the first passage 260 and the chamber 310. The second passage 265 is preferably adapted to controllably convey fluidic materials from the first passage 260 to the chamber 310. In this manner, surge pressures during placement of the apparatus 200 within the wellbore 100 are optimally minimized. In a preferred embodiment, the second passage 265 further includes a valve for controlling the flow of fluidic materials through the second passage 265.

The third passage 270 is fluidically coupled to the first passage 260 and the annular chamber 300. The third passage 270 is preferably adapted to convey fluidic materials between the first passage 260 and the annular chamber 300. In this manner, the annular chamber 300 is optimally pressurized.

The fourth passage 275 is fluidically coupled to the first passage 260, the fifth passage 285, and the chamber 310. The fourth passage 275 is preferably adapted to convey fluidic materials between the fifth passage 285 and the chamber 310. In this manner, during the radial expansion of the tubular

member 200, fluidic materials from the chamber 305 are transmitted to the chamber 310. In a preferred embodiment, the fourth passage 275 further includes a pressure compensated valve and/or a pressure compensated orifice in order to optimally control the flow of fluidic materials through the fourth passage 275.

The throat 280 is fluidically coupled to the first passage 260 and the fifth passage 285. The throat 280 is preferably adapted to receive a conventional fluidic plug or ball. In this manner, the first passage 260 is fluidically isolated from the fifth passage 285.

The fifth passage 285 is fluidically coupled to the throat 280, the fourth passage 275, and the chamber 305. The fifth passage 285 is preferably adapted to convey fluidic materials to and from the first passage 260, the fourth passage 275, and the chamber 305.

The sixth passage 290 is fluidically coupled to the chamber 305 and the seventh passage 295. The sixth passage is preferably adapted to convey fluidic materials to and from the chamber 305. The sixth passage 290 is further preferably adapted to receive a conventional plug or dart. In this manner, the chamber 305 is optimally fluidically isolated from the chamber 315.

The seventh passage 295 is fluidically coupled to the sixth passage 290 and the chamber 315. The seventh passage 295 is preferably adapted to convey fluidic materials between the sixth passage 290 and the chamber 315.

The annular chamber 300 is fluidically coupled to the third passage 270. Pressurization of the annular chamber 300 preferably causes the expansion cone 230 to be displaced in the axial direction. In this manner, the tubular member 200 is radially expanded by the expansion cone 230. During operation of the apparatus 200, the annular chamber 300 is preferably adapted to be pressurized to operating pressures ranging from about 1000 to 10000 psi in order to optimally radially expand the tubular member 200.

The chamber 305 is fluidically coupled to the fifth passage 285 and the sixth passage 290. During operation of the apparatus 200, the chamber 305 is preferably fluidically isolated from the annular chamber 300 and the chamber 315 and fluidically coupled to the chamber 310.

The chamber 310 is fluidically coupled to the fourth passage 275. During operation of the apparatus 200, the chamber 310 is preferably fluidically isolated from the annular chamber 300 and fluidically coupled to the chamber 305.

During operation, as illustrated in FIG. 1A, the apparatus 200 is preferably placed within the wellbore 100 in a predetermined overlapping relationship with the preexisting casing 115. During placement of the apparatus 200 within the wellbore 100, fluidic materials within the chamber 315 are preferably conveyed to the chamber 310 using the second, first, fifth, sixth and seventh fluid passages 265, 260, 285, 290 and 295, respectively. In this manner, surge pressures within the wellbore 100 during placement of the apparatus 200 are minimized. Once the apparatus 200 has been placed at the predetermined location within the wellbore 100, the second passage 265 is preferably closed using a conventional valve member.

As illustrated in FIG. 1B, one or more volumes of a non-hardenable fluidic material are then injected into the chamber 315 using the first, fifth, sixth and seventh passages, 260, 285, 290 and 295 in order to ensure that all of the passages are clear. A quantity of a hardenable fluidic sealing material such as, for example, cement, is then preferably injected into the chamber 315 using the first, fifth, sixth and seventh passages 260, 285, 290 and 295. In this manner, an annular outer sealing layer is preferably formed around the radially expanded tubular member 200.

As illustrated in FIG. 1C, a conventional wiper plug 320 is then preferably injected into the first passage 260 using a non-hardenable fluidic material. The wiper plug 320 preferably passes through the first and fifth passages, 260 and 285, and into the chamber 305. Inside the chamber 305, the wiper plug 320 preferably forces substantially all of the hardenable fluidic material out of the chamber 305 through the sixth passage 290. The wiper plug 320 then preferably lodges in and fluidically seals off the sixth passage 290. In this manner, the chamber 305 is optimally fluidically isolated from the chamber 315. Furthermore, the amount of hardenable sealing material within the chamber 305 is minimized.

As illustrated in FIG. 1D, a conventional sealing ball or plug 325 is then preferably injected into the first passage 260 using a non-hardenable fluidic

material. The sealing ball 325 preferably lodges in and fluidically seals off the throat 280. In this manner, the first passage 260 is fluidically isolated from the fifth fluid passage 285. Consequently, the injected non-hardenable fluidic sealing material passes from the first passage 260 into the third passage 270 and into the annular chamber 300. In this manner, the annular chamber 300 is pressurized.

As illustrated in FIG. 1E, continued injection of a non-hardenable fluidic material into the annular chamber 300 preferably increases the operating pressure within the annular chamber 300, and thereby causes the expansion cone 230 to move in the axial direction. In a preferred embodiment, the axial movement of the expansion cone 230 radially expands the tubular member 200. In a preferred embodiment, the annular chamber 300 is pressurized to operating pressures ranging from about 1000 to 10000 psi. during the radial expansion process. In a preferred embodiment, the pressure differential between the first passage 260 and the fifth passage 285 is maintained at least about 1000 to 10000 psi. during the radial expansion process in order to optimally fluidically seal the throat 280 using the sealing ball 325.

In a preferred embodiment, during the axial movement of the expansion cone 230, at least a portion of the interface between the expansion cone 230 and the tubular member 200 is fluidically sealed by the sealing members 240a and 240b. In a preferred embodiment, during the axial movement of the expansion cone 230, at least a portion of the interface between the expansion cone 230 and the second support member 215 is fluidically sealed by the sealing members 245a, 245b and 240c. In this manner, the annular chamber 300 is optimally fluidically isolated from the chamber 305 during the radial expansion process.

During the radial expansion process, the volumetric size of the annular chamber 300 preferably increases while the volumetric size of the chamber 305 preferably decreases during the radial expansion process. In a preferred embodiment, during the radial expansion process, fluidic materials within the decreasing chamber 305 are transmitted to the chamber 310 using the fourth and fifth passages, 275 and 285. In this manner, the rate and amount of axial movement of the expansion cone 230 is optimally controlled by the flow rate of fluidic materials conveyed from the chamber 300 to the chamber 310. In a

preferred embodiment, the fourth passage 275 further includes a conventional pressure compensated valve in order to optimally control the initiation of the radial expansion process. In a preferred embodiment, the fourth passage 275 further includes a conventional pressure compensated orifice in order to optimally control the rate of the radial expansion process.

In a preferred embodiment, continued radial expansion of the tubular member 200 by the expansion cone 230 causes the sealing members 250 to contact the inside surface of the existing casing 115. In this manner, the interface between the radially expanded tubular member 200 and the preexisting casing 115 is optimally fluidically sealed. Furthermore, in a preferred embodiment, continued radial expansion of the tubular member 200 by the expansion cone 230 causes the anchor 255 to contact and at least partially penetrate the inside surface of the preexisting casing 115. In this manner, the radially expanded tubular member 200 is optimally coupled to the preexisting casing 115.

As illustrated in FIG. 1F, upon the completion of the radial expansion process using the apparatus 200 and the curing of the hardenable fluidic sealing material, a new section of wellbore casing is generated that preferably includes the radially expanded tubular member 200 and an outer annular fluidic sealing member 330. In this manner, a new section of wellbore casing is generated by radially expanding a tubular member into contact with a preexisting section of wellbore casing. In several alternative preferred embodiments, the apparatus 200 is used to form or repair a wellbore casing, a pipeline, or a structural support.

Referring now to FIGS. 2A-2O, and 3A-3J, a preferred embodiment of an apparatus 500 for forming or repairing a wellbore casing, pipeline or structural support will be described. The apparatus 500 preferably includes a first support member 505, a debris shield 510, a second support member 515, one or more crossover valve members 520, a force multiplier outer support member 525, a force multiplier inner support member 530, a force multiplier piston 535, a force multiplier sleeve 540, a first coupling 545, a third support member 550, a spring spacer 555, a preload spring 560, a lubrication fitting 565, a lubrication packer sleeve 570, a body of lubricant 575, a mandrel 580, an expansion cone

585, a centralizer 590, a liner hanger 595, a travel port sealing sleeve 600, a second coupling 605, a collet mandrel 610, a load transfer sleeve 615, one or more locking dogs 620, a locking dog retainer 622, a collet assembly 625, a collet retaining sleeve 635, a collet retaining adapter 640, an outer collet support member 645, a liner hanger setting sleeve 650, one or more crossover valve shear pins 655, one or more set screws 660, one or more collet retaining sleeve shear pins 665, a first passage 670, one or more second passages 675, a third passage 680, one or more crossover valve chambers 685, a primary throat passage 690, a secondary throat passage 695, a fourth passage 700, one or more inner crossover ports 705, one or more outer crossover ports 710, a force multiplier piston chamber 715, a force multiplier exhaust chamber 720, one or more force multiplier exhaust passages 725, a second annular chamber 735, one or more expansion cone travel indicator ports 740, one or more collet release ports 745, a third annular chamber 750, a collet release throat passage 755, a fifth passage 760, one or more sixth passages 765, one or more seventh passages 770, one or more collet sleeve passages 775, one or more force multiplier supply passages 790, a first lubrication supply passage 795, a second lubrication supply passage 800, and a collet sleeve release chamber 805.

The first support member 505 is coupled to the debris shield 510 and the second support member 515. The first support member 505 includes the first passage 670 and the second passages 675 for conveying fluidic materials. The first support member 505 preferably has a substantially annular cross section. The first support member 505 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the first support member 505 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. The first support member 505 preferably further includes a first end 1005, a second end 1010, a first threaded portion 1015, a sealing member 1020, a second threaded portion 1025, and a collar 1035.

The first end 1005 of the first support member 505 preferably includes the first threaded portion 1015 and the first passage 670. The first threaded portion 1015 is preferably adapted to be removably coupled to a conventional

support member. The first threaded portion 1015 may include any number of conventional commercially available threads. In a preferred embodiment, the first threaded portion 1015 is a 4 ½" API IF box threaded portion in order to optimally provide high tensile strength.

The second end 1010 of the first support member 505 is preferably adapted to extend within both the debris shield 510 and the second support member 515. The second end 1010 of the first support member 505 preferably includes the sealing member 1020, the second threaded portion 1025, the first passage 670, and the second passages 675. The sealing member 1020 is preferably adapted to fluidically seal the interface between first support member 505 and the second support member 515. The sealing member 1020 may comprise any number of conventional commercially available sealing members. In a preferred embodiment, the sealing member 1020 is an O-ring sealing member available from Parker Seals in order to optimally provide a fluidic seal. The second threaded portion 1025 is preferably adapted to be removably coupled to the second support member 515. The second threaded portion 1025 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the second threaded portion 1025 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength. In a preferred embodiment, the second end 1010 of the first support member 505 includes a plurality of the passages 675 in order to optimally provide a large flow cross sectional area. The collar 1035 preferably extends from the second end 1010 of the first support member 505 in an outward radial direction. In this manner, the collar 1035 provides a mounting support for the debris shield 510.

The debris shield 510 is coupled to the first support member 505. The debris shield 510 preferably prevents foreign debris from entering the passage 680. In this manner, the operation of the apparatus 200 is optimized. The debris shield 510 preferably has a substantially annular cross section. The debris shield 510 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the debris shield 510 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide resistance to

erosion. The debris shield 510 further preferably includes a first end 1040, a second end 1045, a channel 1050, and a sealing member 1055.

The first end 1040 of the debris shield 510 is preferably positioned above both the outer surface of the second end 1010 of the first support member 505 and the second passages 675 and below the inner surface of the second support member 515. In this manner, fluidic materials from the passages 675 flow from the passages 675 to the passage 680. Furthermore, the first end 1040 of the debris shield 510 also preferably prevents the entry of foreign materials into the passage 680.

The second end 1045 of the debris shield 510 preferably includes the channel 1050 and the sealing member 1055. The channel 1050 of the second end 1045 of the debris shield 510 is preferably adapted to mate with and couple to the collar 1035 of the second end 1010 of the first support member 505. The sealing member 1055 is preferably adapted to seal the interface between the second end 1010 of the first support member 505 and the second end 1045 of the debris shield 510. The sealing member 1055 may comprise any number of conventional commercially available sealing members. In a preferred embodiment, the sealing member 1055 is an O-ring sealing member available from Parker Seals in order to optimally provide a fluidic seal.

The second support member 515 is coupled to the first support member 505, the force multiplier outer support member 525, the force multiplier inner support member 530, and the crossover valve shear pins 655. The second support member 515 is movably coupled to the crossover valve members 520. The second support member 515 preferably has a substantially annular cross section. The second support member 515 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the second support member 515 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. The second support member 515 preferably further includes a first end 1060, an intermediate portion 1065, a second end 1070, a first threaded portion 1075, a second threaded portion 1080, a third threaded portion 1085, a first sealing

member 1090, a second sealing member 1095, and a third sealing member 1100.

The first end 1060 of the second support member 515 is preferably adapted to contain the second end 1010 of the first support member 505 and the debris shield 510. The first end 1060 of the second support member 515 preferably includes the third passage 680 and the first threaded portion 1075. The first threaded portion 1075 of the first end 1060 of the second support member 515 is preferably adapted to be removably coupled to the second threaded portion 1025 of the second end 1010 of the first support member 505. The first threaded portion 1075 may include any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1075 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The intermediate portion 1065 of the second support member 515 preferably includes the crossover valve members 520, the crossover valve shear pins 655, the crossover valve chambers 685, the primary throat passage 690, the secondary throat passage 695, the fourth passage 700, the seventh passages 770, the force multiplier supply passages 790, the second threaded portion 1080, the first sealing member 1090, and the second sealing member 1095. The second threaded portion 1080 is preferably adapted to be removably coupled to the force multiplier outer support member 525. The second threaded portion 1080 may include any number of conventional commercially available threaded portions. In a preferred embodiment, the second threaded portion 1080 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength. The first and second sealing members, 1090 and 1095, are preferably adapted to fluidically seal the interface between the intermediate portion 1065 of the second support member 515 and the force multiplier outer support member 525.

The second end 1070 of the second support member 515 preferably includes the fourth passage 700, the third threaded portion 1085, and the third sealing member 1100. The third threaded portion 1085 of the second end 1070 of the second support member 515 is preferably adapted to be removably coupled to the force multiplier inner support member 530. The third threaded

portion 1085 may include any number of conventional commercially available threaded portions. In a preferred embodiment, the third threaded portion 1085 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength. The third sealing member 1100 is preferably adapted to fluidically seal the interface between the second end 1070 of the second support member 515 and the force multiplier inner support member 530. The third sealing member 1100 may comprise any number of conventional commercially available sealing members. In a preferred embodiment, the third sealing member 1100 is an o-ring sealing member available from Parker Seals in order to optimally provide a fluidic seal.

Each crossover valve member 520 is coupled to corresponding crossover valve shear pins 655. Each crossover valve member 520 is also movably coupled to the second support member 515 and contained within a corresponding crossover valve chamber 685. Each crossover valve member 520 preferably has a substantially circular cross-section. The crossover valve members 520 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the crossover valve members 520 are fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, each crossover valve member 520 includes a first end 1105, an intermediate portion 1110, a second end 1115, a first sealing member 1120, a second sealing member 1125, and recesses 1130.

The first end 1105 of the crossover valve member 520 preferably includes the first sealing member 1120. The outside diameter of the first end 1105 of the crossover valve member 520 is preferably less than the inside diameter of the corresponding crossover valve chamber 685 in order to provide a sliding fit. In a preferred embodiment, the outside diameter of the first end 1105 of the crossover valve member 520 is preferably about 0.005 to 0.010 inches less than the inside diameter of the corresponding crossover valve chamber 685 in order to provide an optimal sliding fit. The first sealing member 1120 is preferably adapted to fluidically seal the dynamic interface between the first end 1105 of the crossover valve member 520 and the corresponding crossover valve chamber

685. The first sealing member 1120 may include any number of conventional commercially available sealing members. In a preferred embodiment, the first sealing member 1120 is an o-ring sealing member available from Parker Seals in order to optimally provide a dynamic fluidic seal.

The intermediate end 1110 of the crossover valve member 520 preferably has an outside diameter that is less than the outside diameters of the first and second ends, 1105 and 1115, of the crossover valve member 520. In this manner, fluidic materials are optimally conveyed from the corresponding inner crossover port 705 to the corresponding outer crossover ports 710 during operation of the apparatus 200.

The second end 1115 of the crossover valve member 520 preferably includes the second sealing member 1125 and the recesses 1130. The outside diameter of the second end 1115 of the crossover valve member 520 is preferably less than the inside diameter of the corresponding crossover valve chamber 685 in order to provide a sliding fit. In a preferred embodiment, the outside diameter of the second end 1115 of the crossover valve member 520 is preferably about 0.005 to 0.010 inches less than the inside diameter of the corresponding crossover valve chamber 685 in order to provide an optimal sliding fit. The second sealing member 1125 is preferably adapted to fluidically seal the dynamic interface between the second end 1115 of the crossover valve member 520 and the corresponding crossover valve chamber 685. The second sealing member 1125 may include any number of conventional commercially available sealing members. In a preferred embodiment, the second sealing member 1125 is an o-ring sealing member available from Parker Seals in order to optimally provide a dynamic fluidic seal. The recesses 1130 are preferably adapted to receive the corresponding crossover valve shear pins 655. In this manner, the crossover valve member 520 is maintained in a substantially stationary position.

The force multiplier outer support member 525 is coupled to the second support member 515 and the liner hanger 595. The force multiplier outer support member 525 preferably has a substantially annular cross section. The force multiplier outer support member 525 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment,

the force multiplier outer support member 525 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. The force multiplier outer support member 525 preferably further includes a first end 1135, a second end 1140, a first threaded portion 1145, and a sealing member 1150.

The first end 1135 of the force multiplier outer support member 525 preferably includes the first threaded portion 1145 and the force multiplier piston chamber 715. The first threaded portion 1145 is preferably adapted to be removably coupled to the second threaded portion 1080 of the intermediate portion 1065 of the second support member 515. The first threaded portion 1145 may include any number of conventional commercially available threads. In a preferred embodiment, the first threaded portion 1145 is a stub acme thread in order to optimally provide high tensile strength.

The second end 1140 of the force multiplier outer support member 525 is preferably adapted to extend within at least a portion of the liner hanger 595. The second end 1140 of the force multiplier outer support member 525 preferably includes the sealing member 1150 and the force multiplier piston chamber 715. The sealing member 1150 is preferably adapted to fluidically seal the interface between the second end 1140 of the force multiplier outer support member 525 and the liner hanger 595. The sealing member 1150 may comprise any number of conventional commercially available sealing members. In a preferred embodiment, the sealing member 1150 is an o-ring with seal backups available from Parker Seals in order to optimally provide a fluidic seal.

The force multiplier inner support member 530 is coupled to the second support member 515 and the first coupling 545. The force multiplier inner support member 530 is movably coupled to the force multiplier piston 535. The force multiplier inner support member 530 preferably has a substantially annular cross-section. The force multiplier inner support member 530 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the force multiplier inner support member 530 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance

to abrasion and fluid erosion. In a preferred embodiment, the outer surface of the force multiplier inner support member 530 includes a nickel plating in order to provide an optimal dynamic seal with the force multiplier piston 535. In a preferred embodiment, the force multiplier inner support member 530 further includes a first end 1155, a second end 1160, a first threaded portion 1165, and a second threaded portion 1170.

The first end 1155 of the force multiplier inner support member 530 preferably includes the first threaded portion 1165 and the fourth passage 700. The first threaded portion 1165 of the first end 1155 of the force multiplier inner support member 530 is preferably adapted to be removably coupled to the third threaded portion 1085 of the second end 1070 of the second support member 515. The first threaded portion 1165 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1165 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The second end 1160 of the force multiplier inner support member 530 preferably includes the second threaded portion 1170, the fourth passage 700, and the force multiplier exhaust passages 725. The second threaded portion 1170 of the second end 1160 of the force multiplier inner support member 530 is preferably adapted to be removably coupled to the first coupling 545. The second threaded portion 1170 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the second threaded portion 1170 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The force multiplier piston 535 is coupled to the force multiplier sleeve 540. The force multiplier piston 535 is movably coupled to the force multiplier inner support member 530. The force multiplier piston 535 preferably has a substantially annular cross-section. The force multiplier piston 535 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the force multiplier piston 535 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to

abrasion and fluid erosion. In a preferred embodiment, the force multiplier piston 535 further includes a first end 1175, a second end 1180, a first sealing member 1185, a first threaded portion 1190, and a second sealing member 1195.

The first end 1175 of the force multiplier piston 535 preferably includes the first sealing member 1185. The first sealing member 1185 is preferably adapted to fluidically seal the dynamic interface between the inside surface of the force multiplier piston 535 and the outside surface of the inner force multiplier support member 530. The first sealing member 1185 may include any number of conventional commercially available sealing members. In a preferred embodiment, the first sealing member 1185 is an o-ring with seal backups available from Parker Seals in order to optimally provide a dynamic seal.

The second end 1180 of the force multiplier piston 535 preferably includes the first threaded portion 1190 and the second sealing member 1195. The first threaded portion 1190 is preferably adapted to be removably coupled to the force multiplier sleeve 540. The first threaded portion 1190 may include any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1190 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength. The second sealing member 1195 is preferably adapted to fluidically seal the interface between the second end 1180 of the force multiplier piston 535 and the force multiplier sleeve 540. The second sealing member 1195 may include any number of conventional commercially available sealing members. In a preferred embodiment, the second sealing member 1195 is an o-ring sealing member available from Parker Seals in order to optimally provide a fluidic seal.

The force multiplier sleeve 540 is coupled to the force multiplier piston 535. The force multiplier sleeve 540 is movably coupled to the first coupling 545. The force multiplier sleeve 540 preferably has a substantially annular cross-section. The force multiplier sleeve 540 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the force multiplier sleeve 540 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In

a preferred embodiment, the inner surface of the force multiplier sleeve 540 includes a nickel plating in order to provide an optimal dynamic seal with the outside surface of the first coupling 545. In a preferred embodiment, the force multiplier sleeve 540 further includes a first end 1200, a second end 1205, and a first threaded portion 1210.

The first end 1200 of the force multiplier sleeve 540 preferably includes the first threaded portion 1210. The first threaded portion 1210 of the first end 1200 of the force multiplier sleeve 540 is preferably adapted to be removably coupled to the first threaded portion 1190 of the second end 1180 of the force multiplier piston 535. The first threaded portion 1210 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1210 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The first coupling 545 is coupled to the force multiplier inner support member 530 and the third support member 550. The first coupling 545 is movably coupled to the force multiplier sleeve 540. The first coupling 545 preferably has a substantially annular cross-section. The first coupling 545 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the first coupling 545 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the first coupling 545 further includes the fourth passage 700, a first end 1215, a second end 1220, a first inner sealing member 1225, a first outer sealing member 1230, a first threaded portion 1235, a second inner sealing member 1240, a second outer sealing member 1245, and a second threaded portion 1250.

The first end 1215 of the first coupling 545 preferably includes the first inner sealing member 1225, the first outer sealing member 1230, and the first threaded portion 1235. The first inner sealing member 1225 is preferably adapted to fluidically seal the interface between the first end 1215 of the first coupling 545 and the second end 1160 of the force multiplier inner support member 530. The first inner sealing member 1225 may include any number of

conventional commercially available sealing members. In a preferred embodiment, the first inner sealing member 1225 is an o-ring seal available from Parker Seals in order to optimally provide a fluidic seal. The first outer sealing member 1230 is preferably adapted to prevent foreign materials from entering the interface between the first end 1215 of the first coupling 545 and the second end 1205 of the force multiplier sleeve 540. The first outer sealing member 1230 is further preferably adapted to fluidically seal the interface between the first end 1215 of the first coupling 545 and the second end 1205 of the force multiplier sleeve 540. The first outer sealing member 1230 may include any number of conventional commercially available sealing members. In a preferred embodiment, the first outer sealing member 1230 is a seal backup available from Parker Seals in order to optimally provide a barrier to foreign materials. The first threaded portion 1235 of the first end 1215 of the first coupling 545 is preferably adapted to be removably coupled to the second threaded portion 1170 of the second end 1160 of the force multiplier inner support member 530. The first threaded portion 1235 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1235 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The second end 1220 of the first coupling 545 preferably includes the second inner sealing member 1240, the second outer sealing member 1245, and the second threaded portion 1250. The second inner sealing member 1240 is preferably adapted to fluidically seal the interface between the second end 1220 of the first coupling 545 and the third support member 550. The second inner sealing member 1240 may include any number of conventional commercially available sealing members. In a preferred embodiment, the second inner sealing member 1240 is an o-ring available from Parker Seals in order to optimally provide a fluidic seal. The second outer sealing member 1245 is preferably adapted to fluidically seal the dynamic interface between the second end 1220 of the first coupling 545 and the second end 1205 of the force multiplier sleeve 540. The second outer sealing member 1245 may include any number of conventional commercially available sealing members. In a

preferred embodiment, the second outer sealing member 1245 is an o-ring with seal backups available from Parker Seals in order to optimally provide a fluidic seal. The second threaded portion 1250 of the second end 1220 of the first coupling 545 is preferably adapted to be removably coupled to the third support member 550. The second threaded portion 1250 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the second threaded portion 1250 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The third support member 550 is coupled to the first coupling 545 and the second coupling 605. The third support member 550 is movably coupled to the spring spacer 555, the preload spring 560, the mandrel 580, and the travel port sealing sleeve 600. The third support member 550 preferably has a substantially annular cross-section. The third support member 550 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the third support member 550 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the outer surface of the third support member 550 includes a nickel plating in order to provide an optimal dynamic seal with the inside surfaces of the mandrel 580 and the travel port sealing sleeve 600. In a preferred embodiment, the third support member 550 further includes a first end 1255, a second end 1260, a first threaded portion 1265, and a second threaded portion 1270.

The first end 1255 of the third support member 550 preferably includes the first threaded portion 1265 and the fourth passage 700. The first threaded portion 1265 of the first end 1255 of the third support member 550 is preferably adapted to be removably coupled to the second threaded portion 1250 of the second end 1220 of the first coupling 545. The first threaded portion 1265 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1265 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The second end 1260 of the third support member 550 preferably includes the second threaded portion 1270 and the fourth passage 700, and the expansion cone travel indicator ports 740. The second threaded portion 1270 of the second end 1260 of the third support member 550 is preferably adapted to be removably coupled to the second coupling 605. The second threaded portion 1270 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the second threaded portion 1270 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The spring spacer 555 is coupled to the preload spring 560. The spring spacer is movably coupled to the third support member 550. The spring spacer 555 preferably has a substantially annular cross-section. The spring spacer 555 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the spring spacer 555 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion.

The preload spring 560 is coupled to the spring spacer 555. The preload spring 560 is movably coupled to the third support member 550. The preload spring 560 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the preload spring 560 is fabricated from alloys of chromium-vanadium or chromium-silicon in order to optimally provide a high preload force for sealing the interface between the expansion cone 585 and the liner hanger 595. In a preferred embodiment, the preload spring 560 has a spring rate ranging from about 500 to 2000 lbf/in in order to optimally provide a preload force.

The lubrication fitting 565 is coupled to the lubrication packer sleeve 570, the body of lubricant 575 and the mandrel 580. The lubrication fitting 565 preferably has a substantially annular cross-section. The lubrication fitting 565 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the lubrication fitting 565 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to

abrasion and fluid erosion. The lubrication fitting 565 preferably includes a first end 1275, a second end 1280, a lubrication injection fitting 1285, a first threaded portion 1290, and the first lubrication supply passage 795.

The first end 1275 of the lubrication fitting 565 preferably includes the lubrication injection fitting 1285, the first threaded portion 1290 and the first lubrication supply passage 795. The lubrication injection fitting 1285 is preferably adapted to permit lubricants to be injected into the first lubrication supply passage 795. The lubrication injection fitting 1285 may comprise any number of conventional commercially available injection fittings. In a preferred embodiment, the lubrication injection fitting 1285 is a model 1641-B grease fitting available from Alemite Corp. in order to optimally provide a connection for injecting lubricants. The first threaded portion 1290 of the first end 1275 of the lubrication fitting 565 is preferably adapted to be removably coupled to the mandrel 580. The first threaded portion 1290 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1290 is a stub acme thread available from Halliburton Energy Services. The second end 1280 of the lubrication fitting 565 is preferably spaced above the outside surface of the mandrel 580 in order to define a portion of the first lubrication supply passage 795.

The lubrication packer sleeve 570 is coupled to the lubrication fitting 565 and the body of lubricant 575. The lubrication packer sleeve 570 is movably coupled to the liner hanger 595. The lubrication packer sleeve 570 is preferably adapted to fluidically seal the radial gap between the outside surface of the second end 1280 of the lubrication fitting 565 and the inside surface of the liner hanger 595. The lubrication packer sleeve 570 is further preferably adapted to compress the body of lubricant 575. In this manner, the lubricants within the body of lubricant 575 are optimally pumped to outer surface of the expansion cone 585.

The lubrication packer sleeve 570 may comprise any number of conventional commercially available packer sleeves. In a preferred embodiment, the lubrication packer sleeve 570 is a 70 durometer packer available from Halliburton Energy Services in order to optimally provide a low pressure fluidic seal.

The body of lubricant 575 is fluidically coupled to the first lubrication supply passage 795 and the second lubrication supply passage 800. The body of lubricant 575 is movably coupled to the lubrication fitting 565, the lubrication packer sleeve 570, the mandrel 580, the expansion cone 585 and the liner hanger 595. The body of lubricant 575 preferably provides a supply of lubricant for lubricating the dynamic interface between the outside surface of the expansion cone 585 and the inside surface of the liner hanger 595. The body of lubricant 575 may include any number of conventional commercially available lubricants. In a preferred embodiment, the body of lubricant 575 includes anti-seize 1500 available from Climax Lubricants and Equipment Co. in order to optimally provide high pressure lubrication.

In a preferred embodiment, during operation of the apparatus 500, the body of lubricant 575 lubricates the interface between the interior surface of the expanded portion of the liner hanger 595 and the exterior surface of the expansion cone 585. In this manner, when the expansion cone 585 is removed from the interior of the radially expanded liner hanger 595, the body of lubricant 575 lubricates the dynamic interfaces between the interior surface of the expanded portion of the liner hanger 595 and the exterior surface of the expansion cone 585. Thus, the body of lubricant 575 optimally reduces the force required to remove the expansion cone 585 from the radially expanded liner hanger 595.

The mandrel 580 is coupled to the lubrication fitting 565, the expansion cone 585, and the centralizer 590. The mandrel 580 is movably coupled to the third support member 550, the body of lubricant 575, and the liner hanger 595. The mandrel 580 preferably has a substantially annular cross-section. The mandrel 580 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the mandrel 580 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the mandrel 580 further includes a first end 1295, an intermediate portion 1300, second end 1305, a first threaded portion 1310, a first sealing member 1315, a second

sealing member 1320, and a second threaded portion 1325, a first wear ring 1326, and a second wear ring 1327.

The first end 1295 of the mandrel 580 preferably includes the first threaded portion 1310, the first sealing member 1315, and the first wear ring 1326. The first threaded portion 1310 is preferably adapted to be removably coupled to the first threaded portion 1290 of the first end 1275 of the lubrication fitting 565. The first threaded portion 1310 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1310 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength. The first sealing member 1315 is preferably adapted to fluidically seal the dynamic interface between the inside surface of the first end 1295 of the mandrel 580 and the outside surface of the third support member 550. The first sealing member 1315 may comprise any number of conventional commercially available sealing members. In a preferred embodiment, the first sealing member 1315 is an o-ring with seal backups available from Parker Seals in order to optimally provide a dynamic fluidic seal. The first wear ring 1326 is preferably positioned within an interior groove formed in the first end 1295 of the mandrel 580. The first wear ring 1326 is preferably adapted to maintain concentricity between and among the mandrel 580 and the third support member 550 during axial displacement of the mandrel 580, reduce frictional forces, and support side loads. In a preferred embodiment, the first wear ring 1326 is a model GR2C wear ring available from Busak & Shamban.

The outside diameter of the intermediate portion 1300 of the mandrel 580 is preferably about 0.05 to 0.25 inches less than the inside diameter of the line hanger 595. In this manner, the second lubrication supply passage 800 is defined by the radial gap between the intermediate portion 1300 of the mandrel 580 and the liner hanger 595.

The second end 1305 of the mandrel 580 preferably includes the second sealing member 1320, the second threaded portion 1325, and the second wear ring 1327. The second sealing member 1320 is preferably adapted to fluidically seal the interface between the inside surface of the expansion cone 585 and the outside surface of the mandrel 580. The second sealing member 1320 may

comprise any number of conventional commercially available sealing members. In a preferred embodiment, the second sealing member 1320 is an o-ring sealing member available from Parker Seals in order to optimally provide a fluidic seal. The second threaded portion 1325 is preferably adapted to be removably coupled to the centralizer 590. The second threaded portion 1325 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the second threaded portion 1325 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength. The second wear ring 1327 is preferably positioned within an interior groove formed in the second end 1305 of the mandrel 580. The second wear ring 1327 is preferably adapted to maintain concentricity between and among the mandrel 580 and the third support member 550 during axial displacement of the mandrel 580, reduce frictional forces, and support side loads. In a preferred embodiment, the second wear ring 1327 is a model GR2C wear ring available from Busak & Shamban.

The expansion cone 585 is coupled to the mandrel 580 and the centralizer 590. The expansion cone 585 is fluidically coupled to the second lubrication supply passage 800. The expansion cone 585 is movably coupled to the body of lubricant 575 and the liner hanger 595. The expansion cone 585 preferably includes a substantially annular cross-section. The expansion cone 585 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the expansion cone 585 is fabricated from cold worked tool steel in order to optimally provide high strength and wear resistance.

In a preferred embodiment, the expansion cone 585 is further provided substantially as described in one or more of the following: (1) U.S. Patent Application Serial No. _____, attorney docket number 25791.9.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/108,558, attorney docket number 25791.9, filed on 11/16/1998, (2) U.S. Patent Application Serial No. _____, attorney docket number 25791.3.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/111,293, filed on 12/7/1998, (3) U.S. Patent Application Serial

Number _____, attorney docket number 25791.8.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/119,611, attorney docket number 25791.8, filed 2/11/1999, (4) U.S. Patent Application Serial Number _____, attorney docket number 25791.7.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/121,702, attorney docket number 25791.7, filed on 2/25/1999, (5) U.S. Patent Application Serial Number _____, attorney docket number 25791.16.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application number 60/121,907, attorney docket number 25791.16, filed 2/26/1999, (6) U.S. Provisional Patent Application Serial Number 60/124,042, attorney docket number 25791.11, filed on 3/11/1999, (7) U.S. Provisional Patent Application Serial Number 60/131,106, attorney docket number 25791.23, filed on 4/26/1999, (8) U.S. Provisional Patent Application Serial Number 60/137,998, attorney docket number 25791.17, filed on 6/7/1999, (9) U.S. Provisional Patent Application Serial Number 60/143,039, attorney docket number 25791.26, filed on 7/9/1999, and (10) U.S. Provisional Patent Application Serial Number 60/146,203, attorney docket number 25791.25, filed on 7/29/1999, the disclosures of which are incorporated by reference.

The centralizer 590 is coupled to the mandrel 580 and the expansion cone 585. The centralizer 590 is movably coupled to the liner hanger 595. The centralizer 590 preferably includes a substantially annular cross-section. The centralizer 590 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the centralizer 590 is fabricated from alloy steel having a minimum yield strength ranging from about 75,000 to 140,000 in order to optimally provide high strength and resistance to abrasion and fluid erosion. The centralizer 590 preferably includes a first end 1330, a second end 1335, a plurality of centralizer fins 1340, and a threaded portion 1345.

The second end 1335 of the centralizer 590 preferably includes the centralizer fins 1340 and the threaded portion 1345. The centralizer fins 1340 preferably extend from the second end 1335 of the centralizer 590 in a substantially radial direction. In a preferred embodiment, the radial gap

between the centralizer fins 1340 and the inside surface of the liner hanger 595 is less than about 0.06 inches in order to optimally provide centralization of the expansion cone 585. The threaded portion 1345 is preferably adapted to be removably coupled to the second threaded portion 1325 of the second end 1305 of the mandrel 580. The threaded portion 1345 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the threaded portion 1345 is a stub acme thread in order to optimally provide high tensile strength.

The liner hanger 595 is coupled to the outer collet support member 645 and the set screws 660. The liner hanger 595 is movably coupled to the lubrication packer sleeve 570, the body of lubricant 575, the expansion cone 585, and the centralizer 590. The liner hanger 595 preferably has a substantially annular cross-section. The liner hanger 595 preferably includes a plurality of tubular members coupled end to end. The axial length of the liner hanger 595 preferably ranges from about 5 to 12 feet. The liner hanger 595 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the liner hanger 595 is fabricated from alloy steel having a minimum yield strength ranging from about 40,000 to 125,000 psi in order to optimally provide high strength and ductility. The liner hanger 595 preferably includes a first end 1350, an intermediate portion 1355, a second end 1360, a sealing member 1365, a threaded portion 1370, one or more set screw mounting holes 1375, and one or more outside sealing portions 1380.

The outside diameter of the first end 1350 of the liner hanger 595 is preferably selected to permit the liner hanger 595 and apparatus 500 to be inserted into another opening or tubular member. In a preferred embodiment, the outside diameter of the first end 1350 of the liner hanger 595 is selected to be about 0.12 to 2 inches less than the inside diameter of the opening or tubular member that the liner hanger 595 will be inserted into. In a preferred embodiment, the axial length of the first end 1350 of the liner hanger 595 ranges from about 8 to 20 inches.

The outside diameter of the intermediate portion 1355 of the liner hanger 595 preferably provides a transition from the first end 1350 to the second end 1360 of the liner hanger. In a preferred embodiment, the axial

length of the intermediate portion 1355 of the liner hanger 595 ranges from about 0.25 to 2 inches in order to optimally provide reduced radial expansion pressures.

The second end 1360 of the liner hanger 595 includes the sealing member 1365, the threaded portion 1370, the set screw mounting holes 1375 and the outside sealing portions 1380. The outside diameter of the second end 1360 of the liner hanger 595 is preferably about 0.10 to 2.00 inches less than the outside diameter of the first end 1350 of the liner hanger 595 in order to optimally provide reduced radial expansion pressures. The sealing member 1365 is preferably adapted to fluidically seal the interface between the second end 1360 of the liner hanger and the outer collet support member 645. The sealing member 1365 may comprise any number of conventional commercially available sealing members. In a preferred embodiment, the sealing member 1365 is an o-ring seal available from Parker Seals in order to optimally provide a fluidic seal. The threaded portion 1370 is preferably adapted to be removably coupled to the outer collet support member 645. The threaded portion 1370 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the threaded portion 1370 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength. The set screw mounting holes 1375 are preferably adapted to receive the set screws 660. Each outside sealing portion 1380 preferably includes a top ring 1385, an intermediate sealing member 1395, and a lower ring 1390. The top and bottom rings, 1385 and 1390, are preferably adapted to penetrate the inside surface of a wellbore casing. The top and bottom rings, 1385 and 1390, preferably extend from the outside surface of the second end 1360 of the liner hanger 595. In a preferred embodiment, the outside diameter of the top and bottom rings, 1385 and 1390, are less than or equal to the outside diameter of the first end 1350 of the liner hanger 595 in order to optimally provide protection from abrasion when placing the apparatus 500 within a wellbore casing or other tubular member. In a preferred embodiment, the top and bottom rings, 1385 and 1390 are fabricated from alloy steel having a minimum yield strength of about 40,000 to 125,000 psi in order to optimally provide high strength and ductility. In a preferred embodiment, the top and

bottom rings, 1385 and 1390, are integrally formed with the liner hanger 595. The intermediate sealing member 1395 is preferably adapted to seal the interface between the outside surface of the second end 1360 of the liner hanger 595 and the inside surface of a wellbore casing. The intermediate sealing member 1395 may comprise any number of conventional sealing members. In a preferred embodiment, the intermediate sealing member 1395 is a 50 to 90 durometer nitrile elastomeric sealing member available from Eutsler Technical Products in order to optimally provide a fluidic seal and shear strength.

The liner hanger 595 is further preferably provided substantially as described in one or more of the following: (1) U.S. Patent Application Serial No. _____, attorney docket number 25791.9.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/108,558, attorney docket number 25791.9, filed on 11/16/1998, (2) U.S. Patent Application Serial No. _____, attorney docket number 25791.3.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/111,293, filed on 12/7/1998, (3) U.S. Patent Application Serial Number _____, attorney docket number 25791.8.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/119,611, attorney docket number 25791.8, filed 2/11/1999, (4) U.S. Patent Application Serial Number _____, attorney docket number 25791.7.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/121,702, attorney docket number 25791.7, filed on 2/25/1999, (5) U.S. Patent Application Serial Number _____, attorney docket number 25791.16.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application number 60/121,907, attorney docket number 25791.16, filed 2/26/1999, (6) U.S. Provisional Patent Application Serial Number 60/124,042, attorney docket number 25791.11, filed on 3/11/1999, (7) U.S. Provisional Patent Application Serial Number 60/131,106, attorney docket number 25791.23, filed on 4/26/1999, (8) U.S. Provisional Patent Application Serial Number 60/137,998, attorney docket number 25791.17, filed on 6/7/1999, (9) U.S. Provisional Patent Application Serial Number 60/143,039, attorney docket

number 25791.26, filed on 7/9/1999, and (10) U.S. Provisional Patent Application Serial Number 60/146,203, attorney docket number 25791.25, filed on 7/29/1999, the disclosures of which are incorporated by reference.

The travel port sealing sleeve 600 is movably coupled to the third support member 550. The travel port sealing sleeve 600 is further initially positioned over the expansion cone travel indicator ports 740. The travel port sealing sleeve 600 preferably has a substantially annular cross-section. The travel port sealing sleeve 600 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the travel port sealing sleeve 600 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. The travel port sealing sleeve preferably includes a plurality of inner sealing members 1400. The inner sealing members 1400 are preferably adapted to seal the dynamic interface between the inside surface of the travel port sealing sleeve 600 and the outside surface of the third support member 550. The inner sealing members 1400 may comprise any number of conventional commercially available sealing members. In a preferred embodiment, the inner sealing members 1400 are o-rings available from Parker Seals in order to optimally provide a fluidic seal. In a preferred embodiment, the inner sealing members 1400 further provide sufficient frictional force to prevent inadvertent movement of the travel port sealing sleeve 600. In an alternative embodiment, the travel port sealing sleeve 600 is removably coupled to the third support member 550 by one or more shear pins. In this manner, accidental movement of the travel port sealing sleeve 600 is prevented.

The second coupling 605 is coupled to the third support member 550 and the collet mandrel 610. The second coupling 605 preferably has a substantially annular cross-section. The second coupling 605 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the second coupling 605 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the second coupling 605 further includes the fourth

passage 700, a first end 1405, a second end 1410, a first inner sealing member 1415, a first threaded portion 1420, a second inner sealing member 1425, and a second threaded portion 1430.

The first end 1405 of the second coupling 605 preferably includes the first inner sealing member 1415 and the first threaded portion 1420. The first inner sealing member 1415 is preferably adapted to fluidically seal the interface between the first end 1405 of the second coupling 605 and the second end 1260 of the third support member 550. The first inner sealing member 1415 may include any number of conventional commercially available sealing members. In a preferred embodiment, the first inner sealing member 1415 is an o-ring available from Parker Seals in order to optimally provide a fluidic seal. The first threaded portion 1420 of the first end 1415 of the second coupling 605 is preferably adapted to be removably coupled to the second threaded portion 1270 of the second end 1260 of the third support member 550. The first threaded portion 1420 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1420 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The second end 1410 of the second coupling 605 preferably includes the second inner sealing member 1425 and the second threaded portion 1430. The second inner sealing member 1425 is preferably adapted to fluidically seal the interface between the second end 1410 of the second coupling 605 and the collet mandrel 610. The second inner sealing member 1425 may include any number of conventional commercially available sealing members. In a preferred embodiment, the second inner sealing member 1425 is an o-ring available from Parker Seals in order to optimally provide a fluidic seal. The second threaded portion 1430 of the second end 1410 of the second coupling 605 is preferably adapted to be removably coupled to the collet mandrel 610. The second threaded portion 1430 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the second threaded portion 1430 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The collet mandrel 610 is coupled to the second coupling 605, the collet retaining adapter 640, and the collet retaining sleeve shear pins 665. The collet mandrel 610 is releasably coupled to the locking dogs 620, the collet assembly 625, and the collet retaining sleeve 635. The collet mandrel 610 preferably has a substantially annular cross-section. The collet mandrel 610 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the collet mandrel 610 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the collet mandrel 610 further includes the fourth passage 700, the collet release ports 745, the collet release throat passage 755, the fifth passage 760, a first end 1435, a second end 1440, a first shoulder 1445, a second shoulder 1450, a recess 1455, a shear pin mounting hole 1460, a first threaded portion 1465, a second threaded portion 1470, and a sealing member 1475.

The first end 1435 of the collet mandrel 610 preferably includes the fourth passage 700, the first shoulder 1445, and the first threaded portion 1465. The first threaded portion 1465 is preferably adapted to be removably coupled to the second threaded portion 1430 of the second end 1410 of the second coupling 605. The first threaded portion 1465 may include any number of conventional threaded portions. In a preferred embodiment, the first threaded portion 1465 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The second end 1440 of the collet mandrel 610 preferably includes the fourth passage 700, the collet release ports 745, the collet release throat passage 755, the fifth passage 760, the second shoulder 1450, the recess 1455, the shear pin mounting hole 1460, the second threaded portion 1470, and the sealing member 1475. The second shoulder 1450 is preferably adapted to mate with and provide a reference position for the collet retaining sleeve 635. The recess 1455 is preferably adapted to define a portion of the collet sleeve release chamber 805. The shear pin mounting hole 1460 is preferably adapted to receive the collet retaining sleeve shear pins 665. The second threaded portion 1470 is preferably adapted to be removably coupled to the collet retaining

adapter 640. The second threaded portion 1470 may include any number of conventional commercially available threaded portions. In a preferred embodiment, the second threaded portions 1470 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength. The sealing member 1475 is preferably adapted to seal the dynamic interface between the outside surface of the collet mandrel 610 and the inside surface of the collet retaining sleeve 635. The sealing member 1475 may include any number of conventional commercially available sealing members. In a preferred embodiment, the sealing member 1475 is an o-ring available from Parker Seals in order to optimally provide a fluidic seal.

The load transfer sleeve 615 is movably coupled to the collet mandrel 610, the collet assembly 625, and the outer collet support member 645. The load transfer sleeve 615 preferably has a substantially annular cross-section. The load transfer sleeve 615 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the load transfer sleeve 615 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the load transfer sleeve 615 further a first end 1480 and a second end 1485.

The inside diameter of the first end 1480 of the load transfer sleeve 615 is preferably greater than the outside diameter of the collet mandrel 610 and less than the outside diameters of the second coupling 605 and the locking dog retainer 622. In this manner, during operation of the apparatus 500, the load transfer sleeve 615 optimally permits the flow of fluidic materials from the second annular chamber 735 to the third annular chamber 750. Furthermore, in this manner, during operation of the apparatus 200, the load transfer sleeve 615 optimally limits downward movement of the second coupling 605 relative to the collet assembly 625.

The second end 1485 of the load transfer sleeve 615 is preferably adapted to cooperatively interact with the collet 625. In this manner, during operation of the apparatus 200, the load transfer sleeve 615 optimally limits downward movement of the second coupling 605 relative to the collet assembly 625.

The locking dogs 620 are coupled to the locking dog retainer 622 and the collet assembly 625. The locking dogs 620 are releasably coupled to the collet mandrel 610. The locking dogs 620 are preferably adapted to lock onto the outside surface of the collet mandrel 610 when the collet mandrel 610 is displaced in the downward direction relative to the locking dogs 620. The locking dogs 620 may comprise any number of conventional commercially available locking dogs. In a preferred embodiment, the locking dogs 620 include a plurality of locking dog elements 1490 and a plurality of locking dog springs 1495.

In a preferred embodiment, each of the locking dog elements 1490 include an arcuate segment including a pair of external grooves for receiving the locking dog springs. 1495. In a preferred embodiment, each of the locking dog springs 1495 are garter springs. During operation of the apparatus 500, the locking dog elements 1490 are preferably radially inwardly displaced by the locking dog springs 1495 when the locking dogs 620 are relatively axially displaced past the first shoulder 1445 of the collet mandrel 610. As a result, the locking dogs 620 are then engaged by the first shoulder 1445 of the collet mandrel 610.

The locking dog retainer 622 is coupled to the locking dogs 620 and the collet assembly 625. The locking dog retainer 622 preferably has a substantially annular cross-section. The locking dog retainer 622 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the locking dog retainer 622 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the locking dog retainer 622 further includes a first end 1500, a second end 1505, and a threaded portion 1510.

The first end 1500 of the locking dog retainer 622 is preferably adapted to capture the locking dogs 620. In this manner, when the locking dogs 620 latch onto the first shoulder 1445 of the collet mandrel 610, the locking dog retainer 622 transmits the axial force to the collet assembly 625.

The second end 1505 of the locking dog retainer preferably includes the threaded portion 1510. The threaded portion 1510 is preferably adapted to be

removably coupled to the collet assembly 625. The threaded portion 1510 may comprise any number of conventional commercially available threaded portions. In a preferred embodiment, the threaded portions 1510 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The collet assembly 625 is coupled to the locking dogs 620 and the locking dog retainer 622. The collet assembly 625 is releasably coupled to the collet mandrel 610, the outer collet support member 645, the collet retaining sleeve 635, the load transfer sleeve 615, and the collet retaining adapter 640. The collet assembly 625 preferably has a substantially annular cross-section. The collet assembly 625 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the collet assembly 625 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the collet assembly 625 includes a collet body 1515, a plurality of collet arms 1520, a plurality of collet upsets 1525, flow passages 1530, and a threaded portion 1535.

The collet body 1515 preferably includes the flow passages 1530 and the threaded portion 1535. The flow passages 1530 are preferably adapted to convey fluidic materials between the second annular chamber 735 and the third annular chamber 750. The threaded portion 1535 is preferably adapted to be removably coupled to the threaded portion 1510 of the second end 1505 of the locking dog retainer 622. The threaded portion 1535 may include any number of conventional commercially available threaded portions. In a preferred embodiment, the threaded portion 1535 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The collet arms 1520 extend from the collet body 1515 in a substantially axial direction. The collet upsets 1525 extend from the ends of corresponding collet arms 1520 in a substantially radial direction. The collet upsets 1525 are preferably adapted to mate with and cooperatively interact with corresponding slots provided in the collet retaining adapter 640 and the liner hanger setting sleeve 650. In this manner, the collet upsets 1525 preferably controllably couple the collet retaining adapter 640 to the outer collet support member 645

and the liner hanger setting sleeve 650. In this manner, axial and radial forces are optimally coupled between the collet retaining adapter 640, the outer collet support member 645 and the liner hanger setting sleeve 650. The collet upsets 1525 preferably include a flat outer surface 1540 and an angled outer surface 1545. In this manner, the collet upsets 1525 are optimally adapted to be removably coupled to the slots provided in the collet retaining adapter 640 and the liner hanger setting sleeve 650.

The collet retaining sleeve 635 is coupled to the collet retaining sleeve shear pins 665. The collet retaining sleeve 635 is movably coupled to the collet mandrel 610 and the collet assembly 625. The collet retaining sleeve 635 preferably has a substantially annular cross-section. The collet retaining sleeve 635 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the collet retaining sleeve 635 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the collet retaining sleeve 635 includes the collet sleeve passages 775, a first end 1550, a second end 1555, one or more shear pin mounting holes 1560, a first shoulder 1570, a second shoulder 1575, and a sealing member 1580.

The first end 1550 of the collet retaining sleeve 635 preferably includes the collet sleeve passages 775, the shear pin mounting holes 1560, and the first shoulder 1570. The collet sleeve passages 775 are preferably adapted to convey fluidic materials between the second annular chamber 735 and the third annular chamber 750. The shear pin mounting holes 1560 are preferable adapted to receive corresponding shear pins 665. The first shoulder 1570 is preferably adapted to mate with the second shoulder 1450 of the collet mandrel 610.

The second end 1555 of the collet retaining sleeve 635 preferably includes the collet sleeve passages 775, the second shoulder 1575, and the sealing member 1580. The collet sleeve passages 775 are preferably adapted to convey fluidic materials between the second annular chamber 735 and the third annular chamber 750. The second shoulder 1575 of the second end 1555 of the collet retaining sleeve 635 and the recess 1455 of the second end 1440 of the

collet mandrel 610 are preferably adapted to define the collet sleeve release chamber 805. The sealing member 1580 is preferably adapted to seal the dynamic interface between the outer surface of the collet mandrel 610 and the inside surface of the collet retaining sleeve 635. The sealing member 1580 may include any number of conventional commercially available sealing members. In a preferred embodiment, the sealing member 1580 is an o-ring available from Parker Seals in order to optimally provide a fluidic seal.

The collet retaining adapter 640 is coupled to the collet mandrel 610. The collet retaining adapter 640 is movably coupled to the liner hanger setting sleeve 650, the collet retaining sleeve 635, and the collet assembly 625. The collet retaining adapter 640 preferably has a substantially annular cross-section. The collet retaining adapter 640 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the collet retaining adapter 640 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the collet retaining adapter 640 includes the fifth passage 760, the sixth passages 765, a first end 1585, an intermediate portion 1590, a second end 1595, a plurality of collet slots 1600, a sealing member 1605, a first threaded portion 1610, and a second threaded portion 1615.

The first end 1585 of the collet retaining adapter 640 preferably includes the collet slots 1600. The collet slots 1600 are preferably adapted to cooperatively interact with and mate with the collet upsets 1525. The collet slots 1600 are further preferably adapted to be substantially aligned with corresponding collet slots provided in the liner hanger setting sleeve 650. In this manner, the slots provided in the collet retaining adapter 640 and the liner hanger setting sleeve 650 are removably coupled to the collet upsets 1525.

The intermediate portion 1590 of the collet retaining adapter 640 preferably includes the sixth passages 765, the sealing member 1605, and the first threaded portion 1610. The sealing member 1605 is preferably adapted to fluidically seal the interface between the outside surface of the collet retaining adapter 640 and the inside surface of the liner hanger setting sleeve 650. The sealing member 1605 may include any number of conventional commercially

available sealing members. In a preferred embodiment, the sealing member 1605 is an o-ring available from Parker Seals in order to optimally provide a fluidic seal. The first threaded portion 1610 is preferably adapted to be removably coupled to the second threaded portion 1470 of the second end 1440 of the collet mandrel 610. The first threaded portion 1610 may include any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1610 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The second end 1595 of the collet retaining adapter 640 preferably includes the fifth passage 760 and the second threaded portion 1615. The second threaded portion 1615 is preferably adapted to be removably coupled to a conventional SSR plug set, or other similar device.

The outer collet support member 645 is coupled to the liner hanger 595, the set screws 660, and the liner hanger setting sleeve 650. The outer collet support member 645 is releasably coupled to the collet assembly 625. The outer collet support member 645 is movably coupled to the load transfer sleeve 615. The outer collet support member 645 preferably has a substantially annular cross-section. The outer collet support member 645 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the outer collet support member 645 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the outer collet support member 645 includes a first end 1620, a second end 1625, a first threaded portion 1630, set screw mounting holes 1635, a recess 1640, and a second threaded portion 1645.

The first end 1620 of the outer collet support member 645 preferably includes the first threaded portion 1630 and the set screw mounting holes 1635. The first threaded portion 1630 is preferably adapted to be removably coupled to the threaded portion 1370 of the second end 1360 of the liner hanger 595. The first threaded portion 1630 may include any number of conventional commercially available threaded portions. In a preferred embodiment, the first threaded portion 1630 is a stub acme thread available from Halliburton Energy

Services in order to optimally provide high tensile strength. The set screw mounting holes 1635 are preferably adapted to receive corresponding set screws 660.

The second end 1625 of the outer collet support member 645 preferably includes the recess 1640 and the second threaded portion 1645. The recess 1640 is preferably adapted to receive a portion of the end of the liner hanger setting sleeve 650. In this manner, the second end 1625 of the outer collet support member 645 overlaps with a portion of the end of the liner hanger setting sleeve 650. The second threaded portion 1645 is preferably adapted to be removably coupled to the liner hanger setting sleeve 650. The second threaded portion 1645 may include any number of conventional commercially available threaded portions. In a preferred embodiment, the second threaded portion 1645 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The liner hanger setting sleeve 650 is coupled to the outer collet support member 645. The liner hanger setting sleeve 650 is releasably coupled to the collet assembly 625. The liner hanger setting sleeve 650 is movably coupled to the collet retaining adapter 640. The liner hanger setting sleeve 650 preferably has a substantially annular cross-section. The liner hanger setting sleeve 650 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the liner hanger setting sleeve 650 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high strength and resistance to abrasion and fluid erosion. In a preferred embodiment, the liner hanger setting sleeve 650 includes a first end 1650, a second end 1655, a recessed portion 1660, a plurality of collet slots 1665, a threaded portion 1670, an interior shoulder 1672, and a threaded portion 1673.

The first end 1650 of the liner hanger setting sleeve 650 preferably includes the recessed portion 1660, the plurality of collet slots 1665 and the threaded portion 1670. The recessed portion 1660 of the first end 1650 of the liner hanger setting sleeve 650 is preferably adapted to mate with the recessed portion 1640 of the second end 1625 of the outer collet support member 645. In this manner, the first end 1650 of the liner hanger setting sleeve 650 overlaps

and mates with the second end 1625 of the outer collet support member 645. The recessed portion 1660 of the first end 1650 of the liner hanger setting sleeve 650 further includes the plurality of collet slots 1665. The collet slots 1665 are preferably adapted to mate with and cooperatively interact with the collet upsets 1525. The collet slots 1665 are further preferably adapted to be aligned with the collet slots 1600 of the collet retaining adapter 640. In this manner, the collet retaining adapter 640 and the liner hanger setting sleeve 650 preferably cooperatively interact with and mate with the collet upsets 1525. The threaded portion 1670 is preferably adapted to be removably coupled to the second threaded portion 1645 of the second end 1625 of the outer collet support member 645. The threaded portion 1670 may include any number of conventional threaded portions. In a preferred embodiment, the threaded portion 1670 is a stub acme thread available from Halliburton Energy Services in order to optimally provide high tensile strength.

The second end 1655 of the liner hanger setting sleeve 650 preferably includes the interior shoulder 1672 and the threaded portion 1673. In a preferred embodiment, the threaded portion 1673 is adapted to be coupled to conventional tubular members. In this manner tubular members are hung from the second end 1655 of the liner hanger setting sleeve 650. The threaded portion 1673 may be any number of conventional commercially available threaded portions. In a preferred embodiment, the threaded portion 1673 is a stub acme thread available from Halliburton Energy Services in order to provide high tensile strength.

The crossover valve shear pins 655 are coupled to the second support member 515. The crossover valve shear pins 655 are releasably coupled to corresponding ones of the crossover valve members 520. The crossover valve shear pins 655 may include any number of conventional commercially available shear pins. In a preferred embodiment, the crossover valve shear pins 655 are ASTM B16 Brass H02 condition shear pins available from Halliburton Energy Services in order to optimally provide consistency.

The set screws 660 coupled to the liner hanger 595 and the outer collet support member 645. The set screws 660 may include any number of conventional commercially available set screws.

The collet retaining sleeve shear pins 665 are coupled to the collet mandrel 610. The collet retaining shear pins 665 are releasably coupled to the collet retaining sleeve 635. The collet retaining sleeve shear pins 665 may include any number of conventional commercially available shear pins. In a preferred embodiment, the collet retaining sleeve shear pins 665 are ASTM B16 Brass H02 condition shear pins available from Halliburton Energy Services in order to optimally provide consistent shear force values.

The first passage 670 is fluidically coupled to the second passages 675 and the secondary throat passage 695. The first passage 670 is preferably defined by the interior of the first support member 505. The first passage 670 is preferably adapted to convey fluidic materials such as, for example, drilling mud, cement, and/or lubricants. In a preferred embodiment, the first passage 670 is adapted to convey fluidic materials at operating pressures and flow rates ranging from about 0 to 10,000 psi and 0 to 650 gallons/minute.

The second passages 675 are fluidically coupled to the first passage 670, the third passage 680, and the crossover valve chambers 685. The second passages 675 are preferably defined by a plurality of radial openings provided in the second end 1010 of the first support member 505. The second passages 675 are preferably adapted to convey fluidic materials such as, for example, drilling mud, cement and/or lubricants. In a preferred embodiment, the second passages 675 are adapted to convey fluidic materials at operating pressures and flow rates ranging from about 0 to 10,000 psi and 0 to 650 gallons/minute.

The third passage 680 is fluidically coupled to the second passages 675 and the force multiplier supply passages 790. The third passage 680 is preferably defined by the radial gap between the second end 1010 of the first support member 505 and the first end 1060 of the second support member 515. The third passage 680 is preferably adapted to convey fluidic materials such as, for example, drilling mud, cement, and/or lubricants. In a preferred embodiment, the third passage 680 is adapted to convey fluidic materials at operating pressures and flow rates ranging from about 0 to 10,000 psi and 0 to 200 gallons/minute.

The crossover valve chambers 685 are fluidically coupled to the third passage 680, the corresponding inner crossover ports 705, the corresponding

outer crossover ports 710, and the corresponding seventh passages 770. The crossover valve chambers 685 are preferably defined by axial passages provided in the second support member 515. The crossover valve chambers 685 are movably coupled to corresponding crossover valve members 520. The crossover valve chambers 685 preferably have a substantially constant circular cross-section.

In a preferred embodiment, during operation of the apparatus 500, one end of one or more of the crossover valve chambers 685 is pressurized by fluidic materials injected into the third passage 680. In this manner, the crossover valve shear pins 655 are sheared and the crossover valve members 520 are displaced. The displacement of the crossover valve members 520 causes the corresponding inner and outer crossover ports, 705 and 710, to be fluidically coupled. In a particularly preferred embodiment, the crossover valve chambers 685 are pressurized by closing the primary and/or the secondary throat passages, 690 and 695, using conventional plugs or balls, and then injecting fluidic materials into the first, second and third passages 670, 675 and 680.

The primary throat passage 690 is fluidically coupled to the secondary throat passage 695 and the fourth passage 700. The primary throat passage 690 is preferably defined by a transitional section of the interior of the second support member 515 in which the inside diameter transitions from a first inside diameter to a second, and smaller, inside diameter. The primary throat passage 690 is preferably adapted to receive and mate with a conventional ball or plug. In this manner, the first passage 670 optimally fluidically isolated from the fourth passage 700.

The secondary throat passage 695 is fluidically coupled to the first passage 670 and the primary throat passage 695. The secondary throat passage 695 is preferably defined by another transitional section of the interior of the second support member 515 in which the inside diameter transitions from a first inside diameter to a second, and smaller, inside diameter. The secondary throat passage 695 is preferably adapted to receive and mate with a conventional ball or plug. In this manner, the first passage 670 optimally fluidically isolated from the fourth passage 700.

The force multiplier exhaust chamber 720 is fluidically coupled to the force multiplier exhaust passages 725. The force multiplier exhaust chamber 720 is preferably defined by the annular region defined by the radial gap between the force multiplier inner support member 530 and the force multiplier sleeve 540 and the axial gap between the force multiplier piston 535 and the first coupling 545. In a preferred embodiment, during operation of the apparatus 500, fluidic materials within the force multiplier exhaust chamber 720 are exhausted into the fourth passage 700 using the force multiplier exhaust passages 725. In this manner, during operation of the apparatus 500, the pressure differential across the force multiplier piston 535 is substantially equal to the difference in operating pressures between the force multiplier piston chamber 715 and the fourth passage 700.

The force multiplier exhaust passages 725 are fluidically coupled to the force multiplier exhaust chamber 720 and the fourth passage 700. The force multiplier exhaust passages 725 are preferably defined by substantially radial openings provided in the second end 1160 of the force multiplier inner support member 530.

The second annular chamber 735 is fluidically coupled to the third annular chamber 750. The second annular chamber 735 is preferably defined by the annular region defined by the radial gap between the third support member 550 and the liner hanger 595 and the axial gap between the centralizer 590 and the collet assembly 625. In a preferred embodiment, during operation of the apparatus 500, fluidic materials displaced by movement of the mandrel 580 and expansion cone 585 are conveyed from the second annular chamber 735 to the third annular chamber 750, the sixth passages 765, and the sixth passage 760. In this manner, the operation of the apparatus 500 is optimized.

The expansion cone travel indicator ports 740 are fluidically coupled to the fourth passage 700. The expansion cone travel indicator ports 740 are controllably fluidically coupled to the second annular chamber 735. The expansion cone travel indicator ports 740 are preferably defined by radial openings in the third support member 550. In a preferred embodiment, during operation of the apparatus 500, the expansion cone travel indicator ports 740 are further controllably fluidically coupled to the force multiplier piston chamber

In a preferred embodiment, the inside diameter of the primary throat passage 690 is less than or equal to the inside diameter of the secondary throat passage 695. In this manner, if required, a primary plug or ball can be placed in the primary throat passage 690, and then a larger secondary plug or ball can be placed in the secondary throat passage 695. In this manner, the first passage 670 is optimally fluidically isolated from the fourth passage 700.

The fourth passage 700 is fluidically coupled to the primary throat passage 690, the seventh passage 770, the force multiplier exhaust passages 725, the collet release ports 745, and the collet release throat passage 755. The fourth passage 700 is preferably defined by the interiors of the second support member 515, the force multiplier inner support member 530, the first coupling 545, the third support member 550, the second coupling 605, and the collet mandrel 610. The fourth passage 700 is preferably adapted to convey fluidic materials such as, for example, drilling mud, cement, and/or lubricants. In a preferred embodiment, the fourth passage 700 is adapted to convey fluidic materials at operating pressures and flow rates ranging from about 0 to 10,000 psi and 0 to 650 gallons/minute.

The inner crossover ports 705 are fluidically coupled to the fourth passage 700 and the corresponding crossover valve chambers 685. The inner crossover ports 705 are preferably defined by substantially radial openings provided in an interior wall of the second support member 515. The inner crossover ports 705 are preferably adapted to convey fluidic materials such as, for example, drilling mud, cement, and lubricants. In a preferred embodiment, the inner crossover ports 705 are adapted to convey fluidic materials at operating pressures and flow rates ranging from about 0 to 10,000 psi and 0 to 50 gallons/minute.

In a preferred embodiment, during operation of the apparatus 500, the inner crossover ports 705 are controllably fluidically coupled to the corresponding crossover valve chambers 685 and outer crossover ports 710 by displacement of the corresponding crossover valve members 520. In this manner, fluidic materials within the fourth passage 700 are exhausted to the exterior of the apparatus 500.

The outer crossover ports 710 are fluidically coupled to corresponding crossover valve chambers 685 and the exterior of the apparatus 500. The outer

crossover ports 710 are preferably defined by substantially radial openings provided in an exterior wall of the second support member 515. The outer crossover ports 710 are preferably adapted to convey fluidic materials such as, for example, drilling mud, cement, and lubricants. In a preferred embodiment, the outer crossover ports 710 are adapted to convey fluidic materials at operating pressures and flow rates ranging from about 0 to 10,000 psi and 0 to 50 gallons/minute.

In a preferred embodiment, during operation of the apparatus 500, the outer crossover ports 710 are controllably fluidically coupled to the corresponding crossover valve chambers 685 and inner crossover ports 705 by displacement of the corresponding crossover valve members 520. In this manner, fluidic materials within the fourth passage 700 are exhausted to the exterior of the apparatus 500.

The force multiplier piston chamber 715 is fluidically coupled to the third passage 680. The force multiplier piston chamber 715 is preferably defined by the annular region defined by the radial gap between the force multiplier inner support member 530 and the force multiplier outer support member 525 and the axial gap between the end of the second support member 515 and the end of the lubrication fitting 565.

In a preferred embodiment, during operation of the apparatus, the force multiplier piston chamber 715 is pressurized to operating pressures ranging from about 0 to 10,000 psi. The pressurization of the force multiplier piston chamber 715 preferably displaces the force multiplier piston 535 and the force multiplier sleeve 540. The displacement of the force multiplier piston 535 and the force multiplier sleeve 540 in turn preferably displaces the mandrel 580 and expansion cone 585. In this manner, the liner hanger 595 is radially expanded. In a preferred embodiment, the pressurization of the force multiplier piston chamber 715 directly displaces the mandrel 580 and the expansion cone 585. In this manner, the force multiplier piston 535 and the force multiplier sleeve 540 may be omitted. In a preferred embodiment, the lubrication fitting 565 further includes one or more slots 566 for facilitating the passage of pressurized fluids to act directly upon the mandrel 580 and expansion cone 585.

715 by displacement of the travel port sealing sleeve 600 caused by axial displacement of the mandrel 580 and expansion cone 585. In this manner, the completion of the radial expansion process is indicated by a pressure drop caused by fluidicly coupling the force multiplier piston chamber 715 with the fourth passage 700.

The collet release ports 745 are fluidicly coupled to the fourth passage 700 and the collet sleeve release chamber 805. The collet release ports 745 are controllably fluidicly coupled to the second and third annular chambers, 735 and 750. The collet release ports 745 are defined by radial openings in the collet mandrel 610. In a preferred embodiment, during operation of the apparatus 500, the collet release ports 745 are controllably pressurized by blocking the collet release throat passage 755 using a conventional ball or plug. The pressurization of the collet release throat passage 755 in turn pressurizes the collet sleeve release chamber 805. The pressure differential between the pressurized collet sleeve release chamber 805 and the third annular chamber 750 then preferably shears the collet shear pins 665 and displaces the collet retaining sleeve 635 in the axial direction.

The third annular chamber 750 is fluidicly coupled to the second annular chamber 735 and the sixth passages 765. The third annular chamber 750 is controllably fluidicly coupled to the collet release ports 745. The third annular chamber 750 is preferably defined by the annular region defined by the radial gap between the collet mandrel 610 and the collet assembly 625 and the first end 1585 of the collet retaining adapter and the axial gap between the collet assembly 625 and the intermediate portion 1590 of the collet retaining adapter 640.

The collet release throat passage 755 is fluidicly coupled to the fourth passage 700 and the fifth passage 760. The collet release throat passage 755 is preferably defined by a transitional section of the interior of the collet mandrel 610 including a first inside diameter that transitions into a second smaller inside diameter. The collet release throat passage 755 is preferably adapted to receive and mate with a conventional sealing plug or ball. In this manner, the fourth passage 700 is optimally fluidicly isolated from the fifth passage 760. In a preferred embodiment, the maximum inside diameter of the

collet release throat passage 755 is less than or equal to the minimum inside diameters of the primary and secondary throat passages, 690 and 695.

In a preferred embodiment, during operation of the apparatus 500, a conventional sealing plug or ball is placed in the collet release throat passage 755. The fourth passage 700 and the collet release ports 745 are then pressurized. The pressurization of the collet release throat passage 755 in turn pressurizes the collet sleeve release chamber 805. The pressure differential between the pressurized collet sleeve release chamber 805 and the third annular chamber 750 then preferably shears the collet shear pins 665 and displaces the collet retaining sleeve 635 in the axial direction.

The fifth passage 760 is fluidically coupled to the collet release throat passage 755 and the sixth passages 765. The fifth passage 760 is preferably defined by the interior of the second end 1595 of the collet retaining adapter 640.

The sixth passages 765 are fluidically coupled to the fifth passage 760 and the third annular chamber 750. The sixth passages 765 are preferably defined by approximately radial openings provided in the intermediate portion 1590 of the collet retaining adapter 640. In a preferred embodiment, during operation of the apparatus 500, the sixth passages 765 fluidically couple the third annular passage 750 to the fifth passage 760. In this manner, fluidic materials displaced by axial movement of the mandrel 580 and expansion cone 585 are exhausted to the fifth passage 760.

The seventh passages 770 are fluidically coupled to corresponding crossover valve chambers 685 and the fourth passage 700. The seventh passages 770 are preferably defined by radial openings in the intermediate portion 1065 of the second support member 515. During operation of the apparatus 700, the seventh passage 770 preferably maintain the rear portions of the corresponding crossover valve chamber 685 at the same operating pressure as the fourth passage 700. In this manner, the pressure differential across the crossover valve members 520 caused by blocking the primary and/or the secondary throat passages, 690 and 695, is optimally maintained.

The collet sleeve passages 775 are fluidically coupled to the second annular chamber 735 and the third annular chamber 750. The collet sleeve passages

775 are preferably adapted to convey fluidic materials between the second annular chamber 735 and the third annular chamber 750. The collet sleeve passages 735 are preferably defined by axial openings provided in the collet sleeve 635.

The force multiplier supply passages 790 are fluidically coupled to the third passage 680 and the force multiplier piston chamber 715. The force multiplier supply passages 790 are preferably defined by a plurality of substantially axial openings in the second support member 515. During operation of the apparatus 500, the force multiplier supply passages 790 preferably convey pressurized fluidic materials from the third passage 680 to the force multiplier piston chamber 715.

The first lubrication supply passage 795 is fluidically coupled to the lubrication fitting 1285 and the body of lubricant 575. The first lubrication supply passage 795 is preferably defined by openings provided in the lubrication fitting 565 and the annular region defined by the radial gap between the lubrication fitting 565 and the mandrel 580. During operation of the apparatus 500, the first lubrication passage 795 is preferably adapted to convey lubricants from the lubrication fitting 1285 to the body of lubricant 575.

The second lubrication supply passage 800 is fluidically coupled to the body of lubricant 575 and the expansion cone 585. The second lubrication supply passage 800 is preferably defined by the annular region defined by the radial gap between the expansion mandrel 580 and the liner hanger 595. During operation of the apparatus 500, the second lubrication passage 800 is preferably adapted to convey lubricants from the body of lubricant 575 to the expansion cone 585. In this manner, the dynamic interface between the expansion cone 585 and the liner hanger 595 is optimally lubricated.

The collet sleeve release chamber 805 is fluidically coupled to the collet release ports 745. The collet sleeve release chamber 805 is preferably defined by the annular region bounded by the recess 1455 and the second shoulder 1575. During operation of the apparatus 500, the collet sleeve release chamber 805 is preferably controllably pressurized. This manner, the collet release sleeve 635 is axially displaced.

Referring to FIGS. 4A to 4G, in a preferred embodiment, during operation of the apparatus 500, the apparatus 500 is coupled to an annular support member 2000 having an internal passage 2001, a first coupling 2005 having an internal passage 2010, a second coupling 2015, a third coupling 2020 having an internal passage 2025, a fourth coupling 2030 having an internal passage 2035, a tail wiper 2050 having an internal passage 2055, a lead wiper 2060 having an internal passage 2065, and one or more tubular members 2070.

The annular support member 2000 may include any number of conventional commercially available annular support members. In a preferred embodiment, the annular support member 2000 further includes a conventional controllable vent passage for venting fluidic materials from the internal passage 2001. In this manner, during placement of the apparatus 500 in the wellbore 2000, fluidic materials in the internal passage 2001 are vented thereby minimizing surge pressures.

The first coupling 2005 is preferably removably coupled to the second threaded portion 1615 of the collet retaining adapter 640 and the second coupling 2015. The first coupling 2005 may comprise any number of conventional commercially available couplings. In a preferred embodiment, the first coupling 2005 is an equalizer case available from Halliburton Energy Services in order to optimally provide containment of the equalizer valve.

The second coupling 2015 is preferably removably coupled to the first coupling 2005 and the third coupling 2020. The second coupling 2015 may comprise any number of conventional commercially available couplings. In a preferred embodiment, the second coupling 2015 is a bearing housing available from Halliburton Energy Services in order to optimally provide containment of the bearings.

The third coupling 2020 is preferably removably coupled to the second coupling 2015 and the fourth coupling 2030. The third coupling 2020 may comprise any number of conventional commercially available couplings. In a preferred embodiment, the third coupling 2020 is an SSR swivel mandrel available from Halliburton Energy Services in order to optimally provide for rotation of tubular members positioned above the SSR plug set.

The fourth coupling 2030 is preferably removably coupled to the third coupling 2020 and the tail wiper 2050. The fourth coupling 2030 may comprise any number of conventional commercially available couplings. In a preferred embodiment, the fourth coupling 2030 is a lower connector available from Halliburton Energy Services in order to optimally provide a connection to a SSR plug set.

The tail wiper 2050 is preferably removably coupled to the fourth coupling 2030 and the lead wiper 2060. The tail wiper 2050 may comprise any number of conventional commercially available tail wipers. In a preferred embodiment, the tail wiper 2050 is an SSR top plug available from Halliburton Energy Services in order to optimally provide separation of cement and drilling mud.

The lead wiper 2060 is preferably removably coupled to the tail wiper 2050. The lead wiper 2060 may comprise any number of conventional commercially available tail wipers. In a preferred embodiment, the lead wiper 2060 is an SSR bottom plug available from Halliburton Energy Services in order to optimally provide separation of mud and cement.

In a preferred embodiment, the first coupling 2005, the second coupling 2015, the third coupling 2020, the fourth coupling 2030, the tail wiper 2050, and the lead wiper 2060 are a conventional SSR wiper assembly available from Halliburton Energy Services in order to optimally provide separation of mud and cement.

The tubular member 2070 are coupled to the threaded portion 1673 of the liner hanger setting sleeve 650. The tubular member 2070 may include one or more tubular members. In a preferred embodiment, the tubular member 2070 includes a plurality of conventional tubular members coupled end to end.

The apparatus 500 is then preferably positioned in a wellbore 2100 having a preexisting section of wellbore casing 2105 using the annular support member 2000. The wellbore 2100 and casing 2105 may be oriented in any direction from the vertical to the horizontal. In a preferred embodiment, the apparatus 500 is positioned within the wellbore 2100 with the liner hanger 595 overlapping with at least a portion of the preexisting wellbore casing 2105. In a preferred embodiment, during placement of the apparatus 500 within the

wellbore 2100, fluidic materials 2200 within the wellbore 2100 are conveyed through the internal passage 2065, the internal passage 2055, the internal passage 2035, the internal passage 2025, the internal passage 2010, the fifth passage 760, the collet release throat passage 755, the fourth passage 700, the primary throat passage 690, the secondary throat passage 695, the first passage 670, and the internal passage 2001. In this manner, surge pressures during insertion and placement of the apparatus 500 within the wellbore 2000 are minimized. In a preferred embodiment, the internal passage 2001 further includes a controllable venting passage for conveying fluidic materials out of the internal passage 2001.

Referring to FIGS. 5A to 5C, in a preferred embodiment, in the event of an emergency after placement of the apparatus 500 within the wellbore 2000, the liner hanger 595, the outer collet support member 645, and the liner hanger setting sleeve 650 are decoupled from the apparatus 500 by first placing a ball 2300 within the collet release throat passage 755. A quantity of a fluidic material 2305 is then injected into the fourth passage 700, the collet release ports 745, and the collet sleeve release chamber 805. In a preferred embodiment, the fluidic material 2305 is a non-hardenable fluidic material such as, for example, drilling mud. Continued injection of the fluidic material 2305 preferably pressurizes the collet sleeve release chamber 805. In a preferred embodiment, the collet sleeve release chamber 805 is pressurized to operating pressures ranging from about 1,000 to 3,000 psi in order to optimally provide a positive indication of the shifting of the collet retaining sleeve 635 as indicated by a sudden pressure drop. The pressurization of the collet sleeve release chamber 805 preferably applies an axial force to the collet retaining sleeve 635. The axial force applied to the collet retaining sleeve 635 preferably shears the collet retaining sleeve shear pins 665. The collet retaining sleeve 635 then preferably is displaced in the axial direction 2310 away from the collet upsets 1525. In a preferred embodiment, the collet retaining sleeve 635 is axially displaced when the operating pressure within the collet sleeve release chamber 805 is greater than about 1650 psi. In this manner, the collet upsets 1525 are no longer held in place within the collet slots 1600 and 1665 by the collet retaining sleeve 635.

In a preferred embodiment, the collet mandrel 610 is then displaced in the axial direction 2315 causing the collet upsets 1525 to be moved in a radial direction 2320 out of the collet slots 1665. The liner hanger 595, the outer collet support member 645, and the liner hanger setting sleeve 650 are thereby decoupled from the remaining portions of the apparatus 500. The remaining portions of the apparatus 500 are then removed from the wellbore 2100. In this manner, in the event of an emergency during operation of the apparatus, the liner hanger 595, the outer collet support member 645, and the liner hanger setting sleeve 650 are decoupled from the apparatus 500. This provides an reliable and efficient method of recovering from an emergency situation such as, for example, where the liner hanger 595, and/or outer collet support member 645, and/or the liner hanger setting sleeve 650 become lodged within the wellbore 2100 and/or the wellbore casing 2105.

Referring to FIGS. 6A to 6C, in a preferred embodiment, after positioning the apparatus 500 within the wellbore 2100, the lead wiper 2060 is released from the apparatus 500 by injecting a conventional ball 2400 into an end portion of the lead wiper 2060 using a fluidic material 2405. In a preferred embodiment, the fluidic material 2405 is a non-hardenable fluidic material such as, for example, drilling mud.

Referring to FIGS. 7A to 7G, in a preferred embodiment, after releasing the lead wiper 2060 from the apparatus 500, a quantity of a hardenable fluidic sealing material 2500 is injected from the apparatus 500 into the wellbore 2100 using the internal passage 2001, the first passage 670, the secondary throat passage 695, the primary throat passage 690, the fourth passage 700, the collet release throat passage 755, the fifth passage 760, the internal passage 2010, the internal passage 2025, the internal passage 2035, and the internal passage 2055. In a preferred embodiment, the hardenable fluidic sealing material 2500 substantially fills the annular space surrounding the liner hanger 595. The hardenable fluidic sealing material 2500 may include any number of conventional hardenable fluidic sealing materials such as, for example, cement or epoxy resin. In a preferred embodiment, the hardenable fluidic sealing material includes oil well cement available from Halliburton Energy Services in order to provide an optimal seal for the surrounding formations and structural

support for the liner hanger 595 and tubular members 2070. In an alternative embodiment, the injection of the hardenable fluidic sealing material 2500 is omitted.

As illustrated in FIG. 7C, in a preferred embodiment, prior to the initiation of the radial expansion process, the preload spring 560 exerts a substantially constant axial force on the mandrel 580 and expansion cone 585. In this manner, the expansion cone 585 is maintained in a substantially stationary position prior to the initiation of the radial expansion process. In a preferred embodiment, the amount of axial force exerted by the preload spring 560 is varied by varying the length of the spring spacer 555. In a preferred embodiment, the axial force exerted by the preload spring 560 on the mandrel 580 and expansion cone 585 ranges from about 500 to 2,000 lbf in order to optimally provide an axial preload force on the expansion cone 585 to ensure metal to metal contact between the outside diameter of the expansion cone 585 and the interior surface of the liner hanger 595.

Referring to FIGS. 8A to 8C, in a preferred embodiment, after injecting the hardenable fluidic sealing material 2500 out of the apparatus 500 and into the wellbore 2100, the tail wiper 2050 is preferably released from the apparatus 500 by injecting a conventional wiper dart 2600 into the tail wiper 2050 using a fluidic material 2605. In a preferred embodiment, the fluidic material 2605 is a non-hardenable fluidic material such as, for example, drilling mud.

Referring to FIGS. 9A to 9H, in a preferred embodiment, after releasing the tail wiper 2050 from the apparatus 500, a conventional ball plug 2700 is placed in the primary throat passage 690 by injecting a fluidic material 2705 into the first passage 670. In a preferred embodiment, a conventional ball plug 2710 is also placed in the secondary throat passage 695. In this manner, the first passage 670 is optimally fluidically isolated from the fourth passage 700. In a preferred embodiment, the differential pressure across the ball plugs 2700 and/or 2710 ranges from about 0 to 10,000 psi in order to optimally fluidically isolate the first passage 670 from the fourth passage 700. In a preferred embodiment, the fluidic material 2705 is a non-hardenable fluidic material. In a preferred embodiment, the fluidic material 2705 includes one or more of the following: drilling mud, water, oil and lubricants.

The injected fluidic material 2705 preferably is conveyed to the crossover valve chamber 685 through the first passage 670, the second passages 675, and the third passage 680. The injected fluidic material 2705 is also preferably conveyed to the force multiplier piston chamber 715 through the first passage 670, the second passages 675, the third passage 680, and the force multiplier supply passages 790. The fluidic material 2705 injected into the crossover valve chambers 685 preferably applies an axial force on one end of the crossover valve members 520. In a preferred embodiment, the axial force applied to the crossover valve members 520 by the injected fluidic material 2705 shears the crossover valve shear pins 655. In this manner, one or more of the crossover valve members 520 are displaced in the axial direction thereby fluidically coupling the fourth passage 700, the inner crossover ports 705, the crossover valve chambers 685, the outer crossover ports 710, and the region outside of the apparatus 500. In this manner, fluidic materials 2715 within the apparatus 500 are conveyed outside of the apparatus. In a preferred embodiment, the operating pressure of the fluidic material 2705 is gradually increased after the placement of the sealing ball 2700 and/or the sealing ball 2710 in the primary throat passage 690 and/or the secondary throat passage 695 in order to minimize stress on the apparatus 500. In a preferred embodiment, the operating pressure required to displace the crossover valve members 520 ranges from about 500 to 3,000 psi in order to optimally prevent inadvertent or premature shifting the crossover valve members 520. In a preferred embodiment, the one or more of the crossover valve members 520 are displaced when the operating pressure of the fluidic material 2705 is greater than or equal to about 1860 psi. In a preferred embodiment, the radial expansion of the liner hanger 595 does not begin until one or more of the crossover valve members 520 are displaced in the axial direction. In this manner, the operation of the apparatus 500 is precisely controlled. Furthermore, in a preferred embodiment, the outer crossover ports 710 include controllable variable orifices in order to control the flow rate of the fluidic materials conveyed outside of the apparatus 500. In this manner, the rate of the radial expansion process is optimally controlled.

In a preferred embodiment, after displacing one or more of the crossover valve members 520, the operating pressure of the fluidic material 2705 is gradually increased until the radial expansion process begins. In an exemplary embodiment, the radial expansion process begins when the operating pressure of the fluidic material 2705 within the force multiplier piston chamber 715 is greater than about 3200 psi. The operating pressure within the force multiplier piston chamber 715 preferably causes the force multiplier piston 535 to be displaced in the axial direction. The axial displacement of the force multiplier piston 535 preferably causes the force multiplier sleeve 540 to be displaced in the axial direction. Fluidic materials 2720 within the force multiplier exhaust chamber 720 are then preferably exhausted into the fourth passage 700 through the force multiplier exhaust passages 725. In this manner, the differential pressure across the force multiplier piston 535 is maximized. In an exemplary embodiment, the force multiplier piston 535 includes about 11.65 square inches of surface area in order to optimally increase the rate of radial expansion of the liner hanger 595 by the expansion cone 585. In a preferred embodiment, the operating pressure within the force multiplier piston chamber 715 ranges from about 1,000 to 10,000 psi during the radial expansion process in order to optimally provide radial expansion of the liner hanger 595.

In a preferred embodiment, the axial displacement of the force multiplier sleeve 540 causes the force multiplier sleeve 540 to drive the mandrel 580 and expansion cone 585 in the axial direction. In a preferred embodiment, the axial displacement of the expansion cone 585 radially expands the liner hanger 595 into contact with the preexisting wellbore casing 2105. In a preferred embodiment, the operating pressure within the force multiplier piston chamber 715 also drives the mandrel 580 and expansion cone 585 in the axial direction. In this manner, the axial force for axially displacing the mandrel 580 and expansion cone 585 preferably includes the axial force applied by the force multiplier sleeve 540 and the axial force applied by the operating pressure within the force multiplier piston chamber 715. In an alternative preferred embodiment, the force multiplier piston 535 and the force multiplier sleeve 540 are omitted and the mandrel 580 and expansion cone 585 are driven solely by fluid pressure.

The radial expansion of the liner hanger 595 preferably causes the top rings 1385 and the lower rings 1390 of the liner hanger 595 to penetrate the interior walls of the preexisting wellbore casing 2105. In this manner, the liner hanger 595 is optimally coupled to the wellbore casing 2105. In a preferred embodiment, during the radial expansion of the liner hanger 595, the intermediate sealing members 1395 of the liner hanger 595 fluidically seal the interface between the radially expanded liner hanger 595 and the interior surface of the wellbore casing 2105.

During the radial expansion process, the dynamic interface between the exterior surface of the expansion cone 585 and the interior surface of the liner hanger 595 is preferably lubricated by lubricants supplied from the body of lubricant 575 through the second lubrication supply passage 800. In this manner, the operational efficiency of the apparatus 500 during the radial expansion process is optimized. In a preferred embodiment, the lubricants supplied by the body of lubricant 575 through the second lubrication passage 800 are injected into the dynamic interface between the exterior surface of the expansion cone 585 and the interior surface of the liner hanger 595 substantially as disclosed in one or more of the following: (1) U.S. Patent Application Serial No. _____, attorney docket number 25791.9.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/108,558, attorney docket number 25791.9, filed on 11/16/1998, (2) U.S. Patent Application Serial No. _____, attorney docket number 25791.3.02, filed on _____, which claimed benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/111,293, filed on 12/7/1998, (3) U.S. Patent Application Serial Number _____, attorney docket number 25791.8.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/119,611, attorney docket number 25791.8, filed 2/11/1999, (4) U.S. Patent Application Serial Number _____, attorney docket number 25791.7.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application Serial Number 60/121,702, attorney docket number 25791.7, filed on 2/25/1999, (5) U.S. Patent Application Serial Number _____, attorney docket number _____

25791.16.02, filed on _____, which claimed the benefit of the filing date of U.S. Provisional Patent Application number 60/121,907, attorney docket number 25791.16, filed 2/26/1999, (6) U.S. Provisional Patent Application Serial Number 60/124,042, attorney docket number 25791.11, filed on 3/11/1999, (7) U.S. Provisional Patent Application Serial Number 60/131,106, attorney docket number 25791.23, filed on 4/26/1999, (8) U.S. Provisional Patent Application Serial Number 60/137,998, attorney docket number 25791.17, filed on 6/7/1999, (9) U.S. Provisional Patent Application Serial Number 60/143,039, attorney docket number 25791.26, filed on 7/9/1999, and (10) U.S. Provisional Patent Application Serial Number 60/146,203, attorney docket number 25791.25, filed on 7/29/1999, the disclosures of which are incorporated by reference.

In a preferred embodiment, the expansion cone 585 is reversible. In this manner, if one end of the expansion cone 585 becomes excessively worn, the apparatus 500 can be disassembled and the expansion cone 585 reversed in order to use the un-worn end of the expansion cone 585 to radially expand the liner hanger 595. In a preferred embodiment, the expansion cone 585 further includes one or more surface inserts fabricated from materials such as, for example, tungsten carbide, in order to provide an extremely durable material for contacting the interior surface of the liner hanger 595 during the radial expansion process.

During the radial expansion process, the centralizer 590 preferably centrally positions the mandrel 580 and the expansion cone 585 within the interior of the liner hanger 595. In this manner, the radial expansion process is optimally provided.

During the radial expansion process, fluidic materials 2725 within the second annular chamber 735 are preferably conveyed to the fifth passage 760 through the collet sleeve passages 775, the flow passages 1530, the third annular chamber 750, and the sixth passages 765. In this manner, the axial displacement of the mandrel 580 and the expansion cone 585 are optimized.

Referring to FIGS. 10A to 10E, in a preferred embodiment, the radial expansion of the liner hanger 595 is stopped by fluidically coupling the force multiplier piston chamber 715 with the fourth passage 700. In particular, during the radial expansion process, the continued axial displacement of the

mandrel 580 and the expansion cone 585, caused by the injection of the fluidic material 2705, displaces the travel port sealing sleeve 600 and causes the force multiplier piston chamber 715 to be fluidically coupled to the fourth passage 700 through the expansion cone travel indicator ports 740. In a preferred embodiment, the travel port sealing sleeve 600 is removably coupled to the third support member 550 by one or more shear pins. In this manner, accidental movement of the travel port sealing sleeve 600 is prevented.

In a preferred embodiment, the fluidic coupling of the force multiplier piston chamber 715 with the fourth passage 700 reduces the operating pressure within the force multiplier piston chamber 715. In a preferred embodiment, the reduction in the operating pressure within the force multiplier piston chamber 715 stops the axial displacement of the mandrel 580 and the expansion cone 585. In this manner, the radial expansion of the liner hanger 595 is optimally stopped. In an alternative preferred embodiment, the drop in the operating pressure within the force multiplier piston chamber 715 is remotely detected and the injection of the fluidic material 2705 is reduced and/or stopped in order to gradually reduce and/or stop the radial expansion process. In this manner, the radial expansion process is optimally controlled by sensing the operating pressure within the force multiplier piston chamber 715.

In a preferred embodiment, after the completion of the radial expansion process, the hardenable fluidic sealing material 2500 is cured. In this manner, a hard annular outer layer of sealing material is formed in the annular region around the liner hanger 595. In an alternative embodiment, the hardenable fluidic sealing material 2500 is omitted.

Referring to FIGS. 11A to 11E, in a preferred embodiment, the liner hanger 595, the outer collet support member 645, and the liner hanger setting sleeve 650 are then decoupled from the apparatus 500. In a preferred embodiment, the liner hanger 595, the collet retaining adapter 640, the outer collet support member 645, and the liner hanger setting sleeve 650 are decoupled from the apparatus 500 by first displacing the annular support member 2000, the first support member 505, the second support member 515, the force multiplier outer support member 525, the force multiplier inner support member 530, the first coupling 545, the third support member 550, the

second coupling 605, the collet mandrel 610, and the collet retaining adapter 640 in the axial direction 2800 relative to the liner hanger 595, the outer collet support member 645, and the liner hanger setting sleeve 650.

In particular, as illustrated in FIG. 11D, the axial displacement of the collet mandrel 610 in the axial direction 2800 preferably displaces the collet retaining sleeve 635 in the axial direction 2800 relative to the collet upsets 1525. In this manner, the collet upsets 1525 are no longer held in the collet slots 1665 by the collet retaining sleeve 635. Furthermore, in a preferred embodiment, the axial displacement of the collet mandrel 610 in the axial direction 2800 preferably displaces the first shoulder 1445 in the axial direction 2800 relative to the locking dogs 620. In this manner, the locking dogs 620 lock onto the first shoulder 1445 when the collet mandrel 610 is then displaced in the axial direction 2805. In a preferred embodiment, axial displacement of the collet mandrel of about 1.50 inches displaces the collet retaining sleeve 635 out from under the collet upsets 1525 and also locks the locking dogs 620 onto the first shoulder 1445 of the collet mandrel 610. Furthermore, the axial displacement of the collet retaining adapter 640 in the axial direction 2800 also preferably displaces the slots 1600 away from the collet upsets 1525.

In a preferred embodiment, the liner hanger 595, the collet retaining adapter 640, the outer collet support member 645, and the liner hanger setting sleeve 650 are then decoupled from the apparatus 500 by displacing the annular support member 2000, the first support member 505, the second support member 515, the force multiplier outer support member 525, the force multiplier inner support member 530, the first coupling 545, the third support member 550, the second coupling 605, the collet mandrel 610, and the collet retaining adapter 640 in the axial direction 2805 relative to the liner hanger 595, the outer collet support member 645, and the liner hanger setting sleeve 650. In particular, the subsequent axial displacement of the collet mandrel 610 in the axial direction 2805 preferably pulls and decouples the collet upsets 1525 from the collet slots 1665. In a preferred embodiment, the angled outer surfaces 1545 of the collet upsets 1525 facilitate the decoupling process.

In an alternative embodiment, if the locking dogs 620 do not lock onto the first shoulder 1445 of the collet mandrel 610, then the annular support

member 2000, the first support member 505, the second support member 515, the force multiplier outer support member 525, the force multiplier inner support member 530, the first coupling 545, the third support member 550, the second coupling 605, the collet mandrel 610, and the collet retaining adapter 640 are then displaced back in the axial direction 2800 and rotated. The rotation of the annular support member 2000, the first support member 505, the second support member 515, the force multiplier outer support member 525, the force multiplier inner support member 530, the first coupling 545, the third support member 550, the second coupling 605, the collet mandrel 610, and the collet retaining adapter 640 preferably misaligns the collet slots 1600 and 1665. In this manner, a subsequent displacement of the in the axial direction 2805 pushes the collet upsets 1525 out of the collet slots 1665 in the liner hanger setting sleeve 650. In a preferred embodiment, the amount of rotation ranges from about 5 to 40 degrees. In this manner, the liner hanger 595, the outer collet support member 645, and the liner hanger setting sleeve 650 are then decoupled from the apparatus 500.

In a preferred embodiment, the removal of the apparatus 500 from the interior of the radially expanded liner hanger 595 is facilitated by the presence of the body of lubricant 575. In particular, the body of lubricant 575 preferably lubricates the interface between the interior surface of the radially expanded liner hanger 595 and the exterior surface of the expansion cone 585. In this manner, the axial force required to remove the apparatus 500 from the interior of the radially expanded liner hanger 595 is minimized.

Referring to FIGS. 12A to 12C, after the removal of the remaining portions of the apparatus 500, a new section of wellbore casing is provided that preferably includes the liner hanger 595, the outer collet support member 645, the liner hanger setting sleeve 650, the tubular members 2070 and an outer annular layer of cured material 2900.

In an alternative embodiment, the interior of the radially expanded liner hanger 595 is used as a polished bore receptacle ("PBR"). In an alternative embodiment, the interior of the radially expanded liner hanger 595 is machined and then used as a PBR. In an alternative embodiment, the first end 1350 of the liner hanger 595 is threaded and coupled to a PBR.

In a preferred embodiment, all surfaces of the apparatus 500 that provide a dynamic seal are nickel plated in order to provide optimal wear resistance.

Referring to FIGS. 13A to 13G, an alternative embodiment of an apparatus 3000 for forming or repairing a wellbore casing, pipeline or structural support will be described. The apparatus 3000 preferably includes the first support member 505, the debris shield 510, the second support member 515, the one or more crossover valve members 520, the force multiplier outer support member 525, the force multiplier inner support member 530, the force multiplier piston 535, the force multiplier sleeve 540, the first coupling 545, the third support member 550, the spring spacer 555, the preload spring 560, the lubrication fitting 565, the lubrication packer sleeve 570, the body of lubricant 575, the mandrel 580, the expansion cone 585, the centralizer 590, the liner hanger 595, the travel port sealing sleeve 600, the second coupling 605, the collet mandrel 610, the load transfer sleeve 615, the one or more locking dogs 620, the locking dog retainer 622, the collet assembly 625, the collet retaining sleeve 635, the collet retaining adapter 640, the outer collet support member 645, the liner hanger setting sleeve 650, the one or more crossover valve shear pins 655, the one or more collet retaining sleeve shear pins 665, the first passage 670, the one or more second passages 675, the third passage 680, the one or more crossover valve chambers 685, the primary throat passage 690, the secondary throat passage 695, the fourth passage 700, the one or more inner crossover ports 705, the one or more outer crossover ports 710, the force multiplier piston chamber 715, the force multiplier exhaust chamber 720, the one or more force multiplier exhaust passages 725, the second annular chamber 735, the one or more expansion cone travel indicator ports 740, the one or more collet release ports 745, the third annular chamber 750, the collet release throat passage 755, the fifth passage 760, the one or more sixth passages 765, the one or more seventh passages 770, the one or more collet sleeve passages 775, the one or more force multiplier supply passages 790, the first lubrication supply passage 795, the second lubrication supply passage 800, the collet sleeve release chamber 805, and a standoff adaptor 3005.

Except as described below, the design and operation of the first support member 505, the debris shield 510, the second support member 515, the one or

more crossover valve members 520, the force multiplier outer support member 525, the force multiplier inner support member 530, the force multiplier piston 535, the force multiplier sleeve 540, the first coupling 545, the third support member 550, the spring spacer 555, the preload spring 560, the lubrication fitting 565, the lubrication packer sleeve 570, the body of lubricant 575, the mandrel 580, the expansion cone 585, the centralizer 590, the liner hanger 595, the travel port sealing sleeve 600, the second coupling 605, the collet mandrel 610, the load transfer sleeve 615, the one or more locking dogs 620, the locking dog retainer 622, the collet assembly 625, the collet retaining sleeve 635, the collet retaining adapter 640, the outer collet support member 645, the liner hanger setting sleeve 650, the one or more crossover valve shear pins 655, the one or more collet retaining sleeve shear pins 665, the first passage 670, the one or more second passages 675, the third passage 680, the one or more crossover valve chambers 685, the primary throat passage 690, the secondary throat passage 695, the fourth passage 700, the one or more inner crossover ports 705, the one or more outer crossover ports 710, the force multiplier piston chamber 715, the force multiplier exhaust chamber 720, the one or more force multiplier exhaust passages 725, the second annular chamber 735, the one or more expansion cone travel indicator ports 740, the one or more collet release ports 745, the third annular chamber 750, the collet release throat passage 755, the fifth passage 760, the one or more sixth passages 765, the one or more seventh passages 770, the one or more collet sleeve passages 775, the one or more force multiplier supply passages 790, the first lubrication supply passage 795, the second lubrication supply passage 800, and the collet sleeve release chamber 805 of the apparatus 3000 are preferably provided as described above with reference to the apparatus 500 in FIGS. 2A to 12C.

Referring to FIGS. 13A to 13C, the standoff adaptor 3005 is coupled to the first end 1005 of the first support member 505. The standoff adaptor 3005 preferably has a substantially annular cross-section. The standoff adaptor 3005 may be fabricated from any number of conventional commercially available materials. In a preferred embodiment, the standoff adaptor 3005 is fabricated from alloy steel having a minimum yield strength of about 75,000 to 140,000 psi in order to optimally provide high tensile strength and resistance to abrasion

and fluid erosion. In a preferred embodiment, the standoff adaptor 3005 includes a first end 3010, a second end 3015, an intermediate portion 3020, a first threaded portion 3025, one or more slots 3030, and a second threaded portion 3035.

The first end 3010 of the standoff adaptor 3005 preferably includes the first threaded portion 3025. The first threaded portion 3025 is preferably adapted to be removably coupled to a conventional tubular support member. The first threaded portion 3025 may be any number of conventional threaded portions. In a preferred embodiment, the first threaded portion 3025 is a 4 1/2" API IF JT BOX thread in order to optimally provide tensile strength.

The intermediate portion 3020 of the standoff adaptor 3005 preferably includes the slots 3030. The outside diameter of the intermediate portion 3020 of the standoff adaptor 3005 is preferably greater than the outside diameter of the liner hanger 595 in order to optimally protect the sealing members 1395, and the top and bottom rings, 1380 and 1390, from abrasion when positioning and/or rotating the apparatus 3000 within a wellbore, or other tubular member. The intermediate portion 3020 of the standoff adaptor 3005 preferably includes a plurality of axial slots 3030 equally positioned about the circumference of the intermediate portion 3020 in order to optimally permit wellbore fluids and other materials to be conveyed along the outside surface of the apparatus 3000.

The second end of the standoff adaptor 3005 preferably includes the second threaded portion 3035. The second threaded portion 3035 is preferably adapted to be removably coupled to the first threaded portion 1015 of the first end 1005 of the first support member 505. The second threaded portion 3035 may be any number of conventional threaded portions. In a preferred embodiment, the second threaded portion 3035 is a 4 1/2" API IF JT PIN thread in order to optimally provide tensile strength.

Referring to FIGS. 13D and 13E, in the apparatus 3000, the second end 1360 of the liner hanger 595 is preferably coupled to the first end 1620 of the outer collet support member 645 using a threaded connection 3040. The threaded connection 3040 is preferably adapted to provide a threaded connection having a primary metal-to-metal seal 3045a and a secondary metal-to-metal seal 3045b in order to optimally provide a fluidic seal. In a preferred

embodiment, the threaded connection 3040 is a DS HST threaded connection available from Halliburton Energy Services in order to optimally provide high tensile strength and a fluidic seal for high operating temperatures.

Referring to FIGS. 13D and 13F, in the apparatus 3000, the second end 1625 of the outer collet support member 645 is preferably coupled to the first end 1650 of the liner hanger setting sleeve 650 using a substantially permanent connection 3050. In this manner, the tensile strength of the connection between the second end 1625 of the outer collet support member 645 and the first end 1650 of the liner hanger setting sleeve 650 is optimized. In a preferred embodiment, the permanent connection 3050 includes a threaded connection 3055 and a welded connection 3060. In this manner, the tensile strength of the connection between the second end 1625 of the outer collet support member 645 and the first end 1650 of the liner hanger setting sleeve 650 is optimized.

Referring to FIGS. 13D, 13E and 13F, in the apparatus 3000, the liner hanger setting sleeve 650 further preferably includes an intermediate portion 3065 having one or more axial slots 3070. In a preferred embodiment, the outside diameter of the intermediate portion 3065 of the liner hanger setting sleeve 650 is greater than the outside diameter of the liner hanger 595 in order to protect the sealing elements 1395 and the top and bottom rings, 1385 and 1390, from abrasion when positioning and/or rotating the apparatus 3000 within a wellbore casing or other tubular member. The intermediate portion 3065 of the liner hanger setting sleeve 650 preferably includes a plurality of axial slots 3070 equally positioned about the circumference of the intermediate portion 3065 in order to optimally permit wellbore fluids and other materials to be conveyed along the outside surface of the apparatus 3000.

In several alternative preferred embodiments, the apparatus 500 and 3000 are used to fabricate and/or repair a wellbore casing, a pipeline, or a structural support. In several other alternative embodiments, the apparatus 500 and 3000 are used to fabricate a wellbore casing, pipeline, or structural support including a plurality of concentric tubular members coupled to a preexisting tubular member.

An apparatus for coupling a tubular member to a preexisting structure has been described that includes a first support member including a first fluid

passage, a manifold coupled to the support member including: a second fluid passage coupled to the first fluid passage including a throat passage adapted to receive a plug, a third fluid passage coupled to the second fluid passage, and a fourth fluid passage coupled to the second fluid passage, a second support member coupled to the manifold including a fifth fluid passage coupled to the second fluid passage, an expansion cone coupled to the second support member, a tubular member coupled to the first support member including one or more sealing members positioned on an exterior surface, a first interior chamber defined by the portion of the tubular member above the manifold, the first interior chamber coupled to the fourth fluid passage, a second interior chamber defined by the portion of the tubular member between the manifold and the expansion cone, the second interior chamber coupled to the third fluid passage, a third interior chamber defined by the portion of the tubular member below the expansion cone, the third interior chamber coupled to the fifth fluid passage, and a shoe coupled to the tubular member including: a throat passage coupled to the third interior chamber adapted to receive a wiper dart, and a sixth fluid passage coupled to the throat passage. In a preferred embodiment, the expansion cone is slidably coupled to the second support member. In a preferred embodiment, the expansion cone includes a central aperture that is coupled to the second support member.

A method of coupling a tubular member to a preexisting structure has also been described that includes positioning a support member, an expansion cone, and a tubular member within a preexisting structure, injecting a first quantity of a fluidic material into the preexisting structure below the expansion cone, and injecting a second quantity of a fluidic material into the preexisting structure above the expansion cone. In a preferred embodiment, the injecting of the first quantity of the fluidic material includes: injecting a hardenable fluidic material. In a preferred embodiment, the injecting of the second quantity of the fluidic material includes: injecting a non-hardenable fluidic material. In a preferred embodiment, the method further includes fluidically isolating an interior portion of the tubular member from an exterior portion of the tubular member. In a preferred embodiment, the method further includes fluidically isolating a first interior portion of the tubular member from a second

interior portion of the tubular member. In a preferred embodiment, the expansion cone divides the interior of the tubular member into a pair of interior chambers. In a preferred embodiment, one of the interior chambers is pressurized. In a preferred embodiment, the method further includes a manifold for distributing the first and second quantities of fluidic material. In a preferred embodiment, the expansion cone and manifold divide the interior of the tubular member into three interior chambers. In a preferred embodiment, one of the interior chambers is pressurized.

An apparatus has also been described that includes a preexisting structure and an expanded tubular member coupled to the preexisting structure. The expanded tubular member is coupled to the preexisting structure by the process of: positioning a support member, an expansion cone, and the tubular member within the preexisting structure, injecting a first quantity of a fluidic material into the preexisting structure below the expansion cone, and injecting a second quantity of a fluidic material into the preexisting structure above the expansion cone. In a preferred embodiment, the injecting of the first quantity of the fluidic material includes: injecting a hardenable fluidic material. In a preferred embodiment, the injecting of the second quantity of the fluidic material includes: injecting a non-hardenable fluidic material. In a preferred embodiment, the apparatus further includes fluidically isolating an interior portion of the tubular member from an exterior portion of the tubular member. In a preferred embodiment, the apparatus further includes fluidically isolating a first interior portion of the tubular member from a second interior portion of the tubular member. In a preferred embodiment, the expansion cone divides the interior of the tubular member into a pair of interior chambers. In a preferred embodiment, one of the interior chambers is pressurized. In a preferred embodiment, the apparatus further includes a manifold for distributing the first and second quantities of fluidic material. In a preferred embodiment, the expansion cone and manifold divide the interior of the tubular member into three interior chambers. In a preferred embodiment, one of the interior chambers is pressurized.

An apparatus for coupling two elements has also been described that includes a support member including one or more support member slots, a tubular member including one or more tubular member slots, and a coupling for removably coupling the tubular member to the support member, including: a coupling body movably coupled to the support member, one or more coupling arms extending from the coupling body and coupling elements extending from corresponding coupling arms adapted to mate with corresponding support member and tubular member slots. In a preferred embodiment, the coupling elements include one or more angled surfaces. In a preferred embodiment, the coupling body includes one or more locking elements for locking the coupling body to the support member. In a preferred embodiment, the apparatus further includes a sleeve movably coupled to the support member for locking the coupling elements within the support member and tubular member slots. In a preferred embodiment, the apparatus further includes one or more shear pins for removably coupling the sleeve to the support member. In a preferred embodiment, the apparatus further includes a pressure chamber positioned between the support member and the sleeve for axially displacing the sleeve relative to the support member.

A method of coupling a first member to a second member has also been described that includes forming a first set of coupling slots in the first member, forming a second set of coupling slots in the second member, aligning the first and second pairs of coupling slots and inserting coupling elements into each of the pairs of coupling slots. In a preferred embodiment, the method further includes movably coupling the coupling elements to the first member. In a preferred embodiment, the method further includes preventing the coupling elements from being removed from each of the pairs of coupling slots. In a preferred embodiment, the first and second members are decoupled by the process of: rotating the first member relative to the second member, and axially displacing the first member relative to the second member. In a preferred embodiment, the first and second members are decoupled by the process of: permitting the coupling elements to be removed from each of the pairs of coupling slots, and axially displacing the first member relative to the second member in a first direction. In a preferred embodiment, permitting the

coupling elements to be removed from each of the pairs of coupling slots includes: axially displacing the first member relative to the second member in a second direction. In a preferred embodiment, the first and second directions are opposite. In a preferred embodiment, permitting the coupling elements to be removed from each of the pairs of coupling slots includes: pressurizing an interior portion of the first member.

An apparatus for controlling the flow of fluidic materials within a housing has also been described that includes a first passage within the housing, a throat passage within the housing fluidically coupled to the first passage adapted to receive a plug, a second passage within the housing fluidically coupled to the throat passage, a third passage within the housing fluidically coupled to the first passage, one or more valve chambers within the housing fluidically coupled to the third passage including moveable valve elements, a fourth passage within the housing fluidically coupled to the valve chambers and a region outside of the housing, a fifth passage within the housing fluidically coupled to the second passage and controllably coupled to the valve chambers by corresponding valve elements, and a sixth passage within the housing fluidically coupled to the second passage and the valve chambers. In a preferred embodiment, the apparatus further includes: one or more shear pins for removably coupling the valve elements to corresponding valve chambers. In a preferred embodiment, the third passage has a substantially annular cross section. In a preferred embodiment, the throat passage includes: a primary throat passage, and a larger secondary throat passage fluidically coupled to the primary throat passage. In a preferred embodiment, the apparatus further includes: a debris shield positioned within the third passage for preventing debris from entering the valve chambers. In a preferred embodiment, the apparatus further includes: a piston chamber within the housing fluidically coupled to the third passage, and a piston movably coupled to and positioned within the piston chamber.

A method of controlling the flow of fluidic materials within a housing including an inlet passage and an outlet passage has also been described that includes injecting fluidic materials into the inlet passage, blocking the inlet passage, and opening the outlet passage. In a preferred embodiment, opening

the outlet passage includes: conveying fluidic materials from the inlet passage to a valve element, and displacing the valve element. In a preferred embodiment, conveying fluidic materials from the inlet passage to the valve element includes: preventing debris from being conveyed to the valve element. In a preferred embodiment, the method further includes conveying fluidic materials from the inlet passage to a piston chamber. In a preferred embodiment, conveying fluidic materials from the inlet passage to the piston chamber includes: preventing debris from being conveyed to the valve element.

An apparatus has also been described that includes a first tubular member, a second tubular member positioned within and coupled to the first tubular member, a first annular chamber defined by the space between the first and second tubular members, an annular piston movably coupled to the second tubular member and positioned within the first annular chamber, an annular sleeve coupled to the annular piston and positioned within the first annular chamber, a third annular member coupled to the second annular member and positioned within and movably coupled to the annular sleeve, a second annular chamber defined by the space between the annular piston, the third annular member, the second tubular member, and the annular sleeve, an inlet passage fluidically coupled to the first annular chamber, and an outlet passage fluidically coupled to the second annular chamber. In a preferred embodiment, the apparatus further includes: an annular expansion cone movably coupled to the second tubular member and positioned within the first annular chamber. In a preferred embodiment, the first tubular member includes: one or more sealing members coupled to an exterior surface of the first tubular member. In a preferred embodiment, the first tubular member includes: one or more ring members coupled to an exterior surface of the first tubular member.

A method of applying an axial force to a first piston positioned within a first piston chamber has also been described that includes applying an axial force to the first piston using a second piston positioned within the first piston chamber. In a preferred embodiment, the method further includes applying an axial force to the first piston by pressurizing the first piston chamber. In a preferred embodiment, the first piston chamber is a substantially annular

chamber. In a preferred embodiment, the method further includes coupling an annular sleeve to the second piston, and applying the axial force to the first piston using the annular sleeve. In a preferred embodiment, the method further includes pressurizing the first piston chamber. In a preferred embodiment, the method further includes coupling the second piston to a second chamber, and depressurizing the second chamber.

An apparatus for radially expanding a tubular member has also been described that includes a support member, a tubular member coupled to the support member, a mandrel movably coupled to the support member and positioned within the tubular member, an annular expansion cone coupled to the mandrel and movably coupled to the tubular member for radially expanding the tubular member, and a lubrication assembly coupled to the mandrel for supplying a lubricant to the annular expansion cone, including: a sealing member coupled to the annular member, a body of lubricant positioned in an annular chamber defined by the space between the sealing member, the annular member, and the tubular member, and a lubrication supply passage fluidically coupled to the body of lubricant and the annular expansion cone for supplying a lubricant to the annular expansion cone. In a preferred embodiment, the tubular member includes: one or more sealing members positioned on an outer surface of the tubular member. In a preferred embodiment, the tubular member includes: one or more ring member positioned on an outer surface of the tubular member. In a preferred embodiment, the apparatus further includes: a centralizer coupled to the mandrel for centrally positioning the expansion cone within the tubular member. In a preferred embodiment, the apparatus further includes: a preload spring assembly for applying an axial force to the mandrel. In a preferred embodiment, the preload spring assembly includes: a compressed spring, and an annular spacer for compressing the compressed spring.

A method of operating an apparatus for radially expanding a tubular member including an expansion cone has also been described that includes lubricating the interface between the expansion cone and the tubular member, centrally positioning the expansion cone within the tubular member, and

applying a substantially constant axial force to the tubular member prior to the beginning of the radial expansion process.

An apparatus has also been described that includes a support member, a tubular member coupled to the support member, an annular expansion cone movably coupled to the support member and the tubular member and positioned within the tubular member for radially expanding the tubular member, and a preload assembly for applying an axial force to the annular expansion cone, including: a compressed spring coupled to the support member for applying the axial force to the annular expansion cone, and a spacer coupled to the support member for controlling the amount of spring compression.

An apparatus for coupling a tubular member to a preexisting structure has also been described that includes a support member, a manifold coupled to the support member for controlling the flow of fluidic materials within the apparatus, a radial expansion assembly movably coupled to the support member for radially expanding the tubular member, and a coupling assembly for removably coupling the tubular member to the support member. In a preferred embodiment, the apparatus further includes a force multiplier assembly movably coupled to the support member for applying an axial force to the radial expansion assembly. In a preferred embodiment, the manifold includes: a throat passage adapted to receive a ball, and a valve for controlling the flow of fluidic materials out of the apparatus. In a preferred embodiment, the manifold further includes: a debris shield for preventing the entry of debris into the apparatus. In a preferred embodiment, the radial expansion assembly includes: a mandrel movably coupled to the support member, and an annular expansion cone coupled to the mandrel. In a preferred embodiment, the radial expansion assembly further includes: a lubrication assembly coupled to the mandrel for providing a lubricant to the interface between the expansion cone and the tubular member. In a preferred embodiment, the radial expansion assembly further includes: a preloaded spring assembly for applying an axial force to the mandrel. In a preferred embodiment, the tubular member includes one or more coupling slots, the support member includes one or more coupling slots, and the coupling assembly includes: a coupling body movably coupled to the support

member, and one or more coupling elements coupled to the coupling body for engaging the coupling slots of the tubular member and the support member.

An apparatus for coupling a tubular member to a preexisting structure has also been described that includes an annular support member including a first passage, a manifold coupled to the annular support member, including: a throat passage fluidically coupled to the first passage adapted to receive a fluid plug, a second passage fluidically coupled to the throat passage, a third passage fluidically coupled to the first passage, a fourth passage fluidically coupled to the third passage, one or more valve chambers fluidically coupled to the fourth passage including corresponding movable valve elements, one or more fifth passages fluidically coupled to the second passage and controllably coupled to corresponding valve chambers by corresponding movable valve elements, one or more sixth passages fluidically coupled to a region outside of the manifold and to corresponding valve chambers, one or more seventh passages fluidically coupled to corresponding valve chambers and the second passage, and one or more force multiplier supply passages fluidically coupled to the fourth passage, a force multiplier assembly coupled to the annular support member, including: a force multiplier tubular member coupled to the manifold, an annular force multiplier piston chamber defined by the space between the annular support member and the force multiplier tubular member and fluidically coupled to the force multiplier supply passages, an annular force multiplier piston positioned in the annular force multiplier piston chamber and movably coupled to the annular support member, a force multiplier sleeve coupled to the annular force multiplier piston, a force multiplier sleeve sealing member coupled to the annular support member and movably coupled to the force multiplier sleeve for sealing the interface between the force multiplier sleeve and the annular support member, an annular force multiplier exhaust chamber defined by the space between the annular force multiplier piston, the force multiplier sleeve, and the force multiplier sleeve sealing member, and a force multiplier exhaust passage fluidically coupled to the annular force multiplier exhaust chamber and the interior of the annular support member, an expandable tubular member, a radial expansion assembly movably coupled to the annular support member, including: an annular mandrel positioned within the annular force multiplier

piston chamber, an annular expansion cone coupled to the annular mandrel and movably coupled to the expandable tubular member, a lubrication assembly coupled to the annular mandrel for supplying lubrication to the interface between the annular expansion cone and the expandable tubular member, a centralizer coupled to the annular mandrel for centering the annular expansion cone within the expandable tubular member, and a preload assembly movably coupled to the annular support member for applying an axial force to the annular mandrel, and a coupling assembly coupled to the annular support member and releasably coupled to the expandable tubular member, including: a tubular coupling member coupled to the expandable tubular member including one or more tubular coupling member slots, an annular support member coupling interface coupled to the annular support member including one or more annular support member coupling interface slots, and a coupling device for releasably coupling the tubular coupling member to the annular support member coupling interface, including: a coupling device body movably coupled to the annular support member, one or more resilient coupling device arms extending from the coupling device body, and one or more coupling device coupling elements extending from corresponding coupling device arms adapted to removably mate with corresponding tubular coupling member and annular support member coupling slots.

A method of coupling a tubular member to a pre-existing structure has also been described that includes positioning an expansion cone and the tubular member within the preexisting structure using a support member, displacing the expansion cone relative to the tubular member in the axial direction, and decoupling the support member from the tubular member. In a preferred embodiment, displacing the expansion cone includes: displacing a force multiplier piston, and applying an axial force to the expansion cone using the force multiplier piston. In a preferred embodiment, displacing the expansion cone includes: applying fluid pressure to the expansion cone. In a preferred embodiment, displacing the force multiplier piston includes: applying fluid pressure to the force multiplier piston. In a preferred embodiment, the method further includes applying fluid pressure to the expansion cone. In a preferred embodiment, the decoupling includes: displacing the support member relative to

the tubular member in a first direction, and displacing the support member relative to the tubular member in a second direction. In a preferred embodiment, decoupling includes: rotating the support member relative to the tubular member, and displacing the support member relative to the tubular member in an axial direction. In a preferred embodiment, the method further includes prior to displacing the expansion cone, injecting a hardenable fluidic material into the preexisting structure. In a preferred embodiment, the method further includes prior to decoupling, curing the hardenable fluidic sealing material.

An apparatus has also been described that includes a preexisting structure, and a radially expanded tubular member coupled to the preexisting structure by the process of: positioning an expansion cone and the tubular member within the preexisting structure using a support member, displacing the expansion cone relative to the tubular member in the axial direction, and decoupling the support member from the tubular member. In a preferred embodiment, displacing the expansion cone includes: displacing a force multiplier piston, and applying an axial force to the expansion cone using the force multiplier piston. In a preferred embodiment, displacing the expansion cone includes: applying fluid pressure to the expansion cone. In a preferred embodiment, displacing the force multiplier piston includes: applying fluid pressure to the force multiplier piston. In a preferred embodiment, the method further includes applying fluid pressure to the expansion cone. In a preferred embodiment, the decoupling includes: displacing the support member relative to the tubular member in a first direction, and displacing the support member relative to the tubular member in a second direction. In a preferred embodiment, decoupling includes: rotating the support member relative to the tubular member, and displacing the support member relative to the tubular member in an axial direction. In a preferred embodiment, the method further includes prior to displacing the expansion cone, injecting a hardenable fluidic material into the preexisting structure. In a preferred embodiment, the method further includes prior to decoupling, curing the hardenable fluidic sealing material.

Although illustrative embodiments of the invention have been shown and described, a wide range of modification, changes and substitution is contemplated in the foregoing disclosure. In some instances, some features of the present invention may be employed without a corresponding use of the other features. Accordingly, it is appropriate that the appended claims be construed broadly and in a manner consistent with the scope of the invention.

Claims

1 1. An apparatus for coupling a tubular member to a preexisting structure,
2 comprising:
3 a first support member including a first fluid passage;
4 a manifold coupled to the support member including:
5 a second fluid passage coupled to the first fluid passage including a
6 throat passage adapted to receive a plug;
7 a third fluid passage coupled to the second fluid passage; and
8 a fourth fluid passage coupled to the second fluid passage;
9 a second support member coupled to the manifold including a fifth fluid
10 passage coupled to the second fluid passage;
11 an expansion cone coupled to the second support member;
12 a tubular member coupled to the first support member including one or
13 more sealing members positioned on an exterior surface;
14 a first interior chamber defined by the portion of the tubular member
15 above the manifold, the first interior chamber coupled to the
16 fourth fluid passage;
17 a second interior chamber defined by the portion of the tubular member
18 between the manifold and the expansion cone, the second interior
19 chamber coupled to the third fluid passage;
20 a third interior chamber defined by the portion of the tubular member
21 below the expansion cone, the third interior chamber coupled to
22 the fifth fluid passage; and
23 a shoe coupled to the tubular member including:
24 a throat passage coupled to the third interior chamber adapted to
25 receive a wiper dart; and
26 a sixth fluid passage coupled to the throat passage.

1 2. A method of coupling a tubular member to a preexisting structure,
2 comprising:
3 positioning a support member, an expansion cone, and a tubular member
4 within a preexisting structure;

5 injecting a first quantity of a fluidic material into the preexisting
6 structure below the expansion cone; and
7 injecting a second quantity of a fluidic material into the preexisting
8 structure above the expansion cone.

1 3. An apparatus, comprising:
2 a preexisting structure; and
3 an expanded tubular member coupled to the preexisting structure;
4 wherein the expanded tubular member is coupled to the preexisting
5 structure by the process of:
6 positioning a support member, an expansion cone, and the tubular
7 member within the preexisting structure;
8 injecting a first quantity of a fluidic material into the preexisting
9 structure below the expansion cone; and
10 injecting a second quantity of a fluidic material into the
11 preexisting structure above the expansion cone.

1 4. An apparatus for coupling two elements, comprising:
2 a support member including one or more support member slots;
3 a tubular member including one or more tubular member slots; and
4 a coupling for removably coupling the tubular member to the support
5 member, including:
6 a coupling body movably coupled to the support member;
7 one or more coupling arms extending from the coupling body; and
8 coupling elements extending from corresponding coupling arms
9 adapted to mate with corresponding support member and
10 tubular member slots.

1 5. A method of coupling a first member to a second member, comprising:
2 forming a first set of coupling slots in the first member;
3 forming a second set of coupling slots in the second member;
4 aligning the first and second pairs of coupling slots; and
5 inserting coupling elements into each of the pairs of coupling slots.

1 6. An apparatus for controlling the flow of fluidic materials within a
2 housing, comprising:
3 a first passage within the housing;
4 a throat passage within the housing fluidically coupled to the first passage
5 adapted to receive a plug;
6 a second passage within the housing fluidically coupled to the throat
7 passage;
8 a third passage within the housing fluidically coupled to the first passage;
9 one or more valve chambers within the housing fluidically coupled to the
10 third passage including moveable valve elements;
11 a fourth passage within the housing fluidically coupled to the valve
12 chambers and a region outside of the housing;
13 a fifth passage within the housing fluidically coupled to the second passage
14 and controllably coupled to the valve chambers by corresponding
15 valve elements; and
16 a sixth passage within the housing fluidically coupled to the second passage
17 and the valve chambers.

1 7. A method of controlling the flow of fluidic materials within a housing
2 including an inlet passage and an outlet passage, comprising:
3 injecting fluidic materials into the inlet passage;
4 blocking the inlet passage; and
5 opening the outlet passage.

1 8. An apparatus, comprising:
2 a first tubular member;
3 a second tubular member positioned within and coupled to the first
4 tubular member;
5 a first annular chamber defined by the space between the first and
6 second tubular members;
7 an annular piston movably coupled to the second tubular member and
8 positioned within the first annular chamber;

9 an annular sleeve coupled to the annular piston and positioned within
10 the first annular chamber;
11 a third annular member coupled to the second annular member and
12 positioned within and movably coupled to the annular sleeve;
13 a second annular chamber defined by the space between the annular
14 piston, the third annular member, the second tubular member,
15 and the annular sleeve;
16 an inlet passage fluidically coupled to the first annular chamber; and
17 an outlet passage fluidically coupled to the second annular chamber.

1 9. A method of applying an axial force to a first piston positioned within a
2 first piston chamber, comprising:
3 applying an axial force to the first piston using a second piston positioned
4 within the first piston chamber.

1 10. An apparatus for radially expanding a tubular member, comprising:
2 a support member;
3 a tubular member coupled to the support member;
4 a mandrel movably coupled to the support member and positioned within
5 the tubular member;
6 an annular expansion cone coupled to the mandrel and movably coupled
7 to the tubular member for radially expanding the tubular member;
8 and
9 a lubrication assembly coupled to the mandrel for supplying a lubricant
10 to the annular expansion cone, including:
11 a sealing member coupled to the annular member;
12 a body of lubricant positioned in an annular chamber defined by
13 the space between the sealing member, the annular
14 member, and the tubular member; and
15 a lubrication supply passage fluidically coupled to the body of
16 lubricant and the annular expansion cone for supplying a
17 lubricant to the annular expansion cone.

1 11. A method of operating an apparatus for radially expanding a tubular
2 member including an expansion cone, comprising:
3 lubricating the interface between the expansion cone and the tubular
4 member;
5 centrally positioning the expansion cone within the tubular member; and
6 applying a substantially constant axial force to the tubular member prior
7 to a beginning of a radial expansion process.

1 12. An apparatus, comprising:
2 a support member;
3 a tubular member coupled to the support member;
4 an annular expansion cone movably coupled to the support member and
5 the tubular member and positioned within the tubular member for
6 radially expanding the tubular member; and
7 a preload assembly for applying an axial force to the annular expansion
8 cone, including:
9 a compressed spring coupled to the support member for applying
10 the axial force to the annular expansion cone; and
11 a spacer coupled to the support member for controlling the
12 amount of spring compression.

1 13. An apparatus for coupling a tubular member to a preexisting structure,
2 comprising:
3 a support member;
4 a manifold coupled to the support member for controlling the flow of
5 fluidic materials within the apparatus;
6 a radial expansion assembly movably coupled to the support member for
7 radially expanding the tubular member; and
8 a coupling assembly for removably coupling the tubular member to the
9 support member.

1 14. An apparatus for coupling a tubular member to a preexisting structure,
2 comprising:

3 an annular support member including a first passage;
4 a manifold coupled to the annular support member, including:
5 a throat passage fluidically coupled to the first passage adapted to
6 receive a fluid plug;
7 a second passage fluidically coupled to the throat passage;
8 a third passage fluidically coupled to the first passage;
9 a fourth passage fluidically coupled to the third passage;
10 one or more valve chambers fluidically coupled to the fourth passage
11 including corresponding movable valve elements;
12 one or more fifth passages fluidically coupled to the second passage
13 and controllably coupled to corresponding valve chambers
14 by corresponding movable valve elements;
15 one or more sixth passages fluidically coupled to a region outside of
16 the manifold and to corresponding valve chambers;
17 one or more seventh passages fluidically coupled to corresponding
18 valve chambers and the second passage; and
19 one or more force multiplier supply passages fluidically coupled to
20 the fourth passage;
21 a force multiplier assembly coupled to the annular support member,
22 including:
23 a force multiplier tubular member coupled to the manifold;
24 an annular force multiplier piston chamber defined by the space
25 between the annular support member and the force
26 multiplier tubular member and fluidically coupled to the force
27 multiplier supply passages;
28 an annular force multiplier piston positioned in the annular force
29 multiplier piston chamber and movably coupled to the
30 annular support member;
31 a force multiplier sleeve coupled to the annular force multiplier
32 piston;
33 a force multiplier sleeve sealing member coupled to the annular
34 support member and movably coupled to the force

35 multiplier sleeve for sealing the interface between the force
36 multiplier sleeve and the annular support member;
37 an annular force multiplier exhaust chamber defined by the space
38 between the annular force multiplier piston, the force
39 multiplier sleeve, and the force multiplier sleeve sealing
40 member; and
41 a force multiplier exhaust passage fluidically coupled to the annular
42 force multiplier exhaust chamber and the interior of the
43 annular support member;
44 an expandable tubular member;
45 a radial expansion assembly movably coupled to the annular support
46 member, including:
47 an annular mandrel positioned within the annular force multiplier
48 piston chamber;
49 an annular expansion cone coupled to the annular mandrel and
50 movably coupled to the expandable tubular member;
51 a lubrication assembly coupled to the annular mandrel for
52 supplying lubrication to the interface between the annular
53 expansion cone and the expandable tubular member;
54 a centralizer coupled to the annular mandrel for centering the
55 annular expansion cone within the expandable tubular
56 member; and
57 a preload assembly movably coupled to the annular support
58 member for applying an axial force to the annular mandrel;
59 and
60 a coupling assembly coupled to the annular support member and
61 releasably coupled to the expandable tubular member, including:
62 a tubular coupling member coupled to the expandable tubular
63 member including one or more tubular coupling member
64 slots;
65 an annular support member coupling interface coupled to the
66 annular support member including one or more annular
67 support member coupling interface slots; and

a coupling device for releasably coupling the tubular coupling
69 member to the annular support member coupling interface,
70 including:
71 a coupling device body movably coupled to the annular
72 support member;
73 one or more resilient coupling device arms extending from
74 the coupling device body; and
75 one or more coupling device coupling elements extending
76 from corresponding coupling device arms adapted to
77 removably mate with corresponding tubular coupling
78 member and annular support member coupling slots.

1 15. A method of coupling a tubular member to a pre-existing structure,
2 comprising:
3 positioning an expansion cone and the tubular member within the
4 preexisting structure using a support member;
5 displacing the expansion cone relative to the tubular member in the axial
6 direction; and
7 decoupling the support member from the tubular member.

1 16. An apparatus, comprising:
2 a preexisting structure; and
3 a radially expanded tubular member coupled to the preexisting structure
4 by the process of:
5 positioning an expansion cone and the tubular member within the
6 preexisting structure using a support member;
7 displacing the expansion cone relative to the tubular member in
8 the axial direction; and
9 decoupling the support member from the tubular member.



Application No: GB 0004285.3
Claims searched: 1

Examiner: David Pepper
Date of search: 12 July 2000

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.R): E1F FJT, FLA

Int Cl (Ed.7): E21B

Other: Online: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	GB 2344606 A (Shell Int Research)	-
A	EP 0881354 A (Sofitech N.V.)	-
A	WO 98/00626 A (Shell Int Research)	-
A,E	US 6070671 A (Shell Oil Co)	-

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.